

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0014442906](#)  
**Status:** **Active**  
**Overview:** [SL](#)  
**Description:** 2.54mm (.100") Pitch SL™ Insulation Displacement Connector Assembly, Male, Single Row, Version D, Back Ribs, for Wire Size 26, 0.76µm (30µ") Gold (Au), 6 Circuits

**Documents:**

[3D Model](#) [Product Specification PS-70475 \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)  
[Product Specification PS-70400 \(PDF\)](#)

**General**

Product Family	Ribbon Cable / Wire Trap Connectors
Series	<a href="#">70475</a>
Comments	Terminals Preloaded
Component Type	Housing
Glow-Wire Compliant	No
Overview	<a href="#">SL</a>
Product Name	SL™


**Physical**

Circuits (Loaded)	6
Color - Resin	Black
Durability (mating cycles max)	50
Entry Angle	Vertical
Flammability	94V-0
Lock to Mating Part	None
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Polyester Alloy
Number of Rows	1
PCB Retention	None
Packaging Type	Tube
Pitch - Mating Interface (in)	0.100 In
Pitch - Mating Interface (mm)	2.54 mm
Plating min: Mating (µin)	30
Plating min: Mating (µm)	0.76
Plating min: Termination (µin)	75
Plating min: Termination (µm)	1.91
Polarized to Mating Part	No
Stackable	Yes
Surface Mount Compatible (SMC)	N/A
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	IDT or Pierce
Wire Insulation Diameter	1.35mm (.053") max.
Wire Size AWG	26
Wire/Cable Type	Discrete Wire
Wire/Cable Type	Ribbon Cable

**Electrical**

CSA	LR19980
Current - Maximum	1.8A
UL	E29179
Voltage - Maximum	250V

**Material Info**

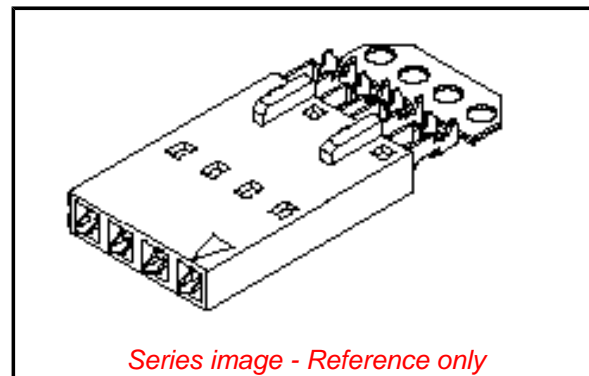

**EU RoHS**

**ELV and RoHS Compliant**  
**REACH SVHC Not Reviewed**  
**Halogen-Free Status Not Reviewed**

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[70475 Series](#)

**Mates With**

[70004 Interim Clip \(Single Row\)](#), [70013 Interim Clip \(Dual Row\)](#)

**Use With**

[7307 Tinned 28AWG](#), [7767 Topcoat 28AWG](#), [24241 Tinned 26AWG](#), [8996 Topcoat 26AWG](#), [24226 Tinned 24AWG](#), [8997 Topcoat 24AWG](#), [24369 High Flex 26AWG](#), [24389 High Flex 24AWG](#)

**Application Tooling | [FAQ](#)**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

Description	Product #
IDT Discrete	<a href="#">0621000700</a>
Handtool Module for SL™	

Old Part Number

70475-1300

**Reference - Drawing Numbers**

Product Specification

PS-70400

Product Specification

PS-70475

Sales Drawing

SDA-70475-1296-1319

This document was generated on 12/07/2009

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**