

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0022287241](#)
Status: **Active**
Description: 2.54mm (.100") Pitch KK® Header, Breakaway, Right Angle, 24 Circuits, Tin (Sn) Plating, Mating Pin Length 10.29mm (.405"), with Kinked PC Tails

Documents:

- | | |
|---|--|
| 3D Model | Product Specification PS-10-07 (PDF) |
| Drawing (PDF) | RoHS Certificate of Compliance (PDF) |
| Packaging Specification (PDF) | |

General


Product Family	PCB Headers
Series	42376
Application	Board-to-Board
Application	Wire-to-Board
Application Tooling Part Link	011201230
Product Name	KK®

Physical

Breakaway	Yes
Circuits (Loaded)	24
Circuits (maximum)	24
Color - Resin	Black
Durability (mating cycles max)	25
Flammability	94V-0
Glow-Wire Compliant	No
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Number of Rows	1
Orientation	Right Angle
PC Tail Length (in)	0.135 In
PC Tail Length (mm)	3.43 mm
PCB Locator	No
PCB Retention	Yes
PCB Thickness Recommended (in)	0.062 In
PCB Thickness Recommended (mm)	1.60 mm
Packaging Type	Bag
Pitch - Mating Interface (in)	0.100 In
Pitch - Mating Interface (mm)	2.54 mm
Plating min: Mating (µin)	100
Plating min: Mating (µm)	2.5
Plating min: Termination (µin)	100
Plating min: Termination (µm)	2.5
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	0°C to +75°C
Termination Interface: Style	Through Hole

Electrical

CSA	LR19980
Current - Maximum	4A
UL	E29179

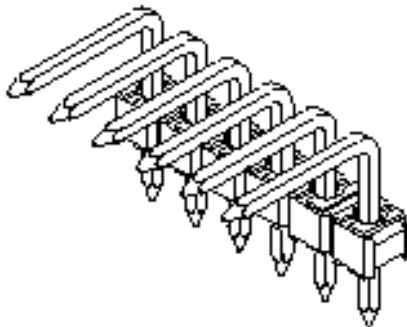

Series image - Reference only

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

**Contains SVHC: No
Halogen-Free
Status**

China RoHS



Not Reviewed

**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series

[42376](#) Series

Mates With

[2695](#) , [6471](#) , [7880](#) , [4455](#) , [7720](#) , [70430](#)
, [7859](#) , L ink:[90148](#), [90147](#) , [70400a](#) ,
[70066a](#) , [40556](#)

Application Tooling | FAQ

*Tooling specifications and manuals are
found by selecting the products below.
Crimp Height Specifications are then
contained in the Application Tooling
Specification document.*

Global

Description

Product #

Cutting Tool for 2.54mm (.100") Centers Breakaway Headers, 2-80 Circuits	0011201230
--	----------------------------

Voltage - Maximum	250V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	5
Lead-free Process Capability	Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	235
Material Info	
Old Part Number	42376-0339
Reference - Drawing Numbers	
Product Specification	PS-10-07
Sales Drawing	SD-42376-001

This document was generated on 12/10/2009

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION