

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0444411004](#)
Status: **Active**
Description: 7.50mm (.295") Pitch Sabre™ Receptacle Housing, Single Row, PA Polyamide Nylon 6/6, UL 94V-2, 4 Circuits, Glow Wire Compatible

Documents:

Product Literature (PDF)	3D Model
Drawing (PDF)	Product Specification PSX-44441-9999 (PDF)
Product Literature (PDF)	RoHS Certificate of Compliance (PDF)

General

Product Family	Crimp Housings
Series	44441
Comments	Glow Wire Equivalent Part Number 444411004 . Meets UL 1950 finger proof standard when mated to 43680-1002 plug loaded with 43178-5002 or 43178-6002 male terminals or when mated to a 46007 series 2 circuit, UL 94V-2 right angle header. Sabre™
Product Name	

Physical

Circuits (maximum)	4
Color - Resin	Natural
Flammability	94V-0
Gender	Female
Glow-Wire Compliant	Yes
Lock to Mating Part	Yes
Material - Resin	Nylon
Number of Rows	1
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface (in)	0.295 In
Pitch - Mating Interface (mm)	7.50 mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-40°C to +75°C


Electrical

CSA	LR19980
Current - Maximum	18A
UL	E29179

Material Info

Reference - Drawing Numbers

Product Specification	PSX-44441-9999
Sales Drawing	SD-44441-1004

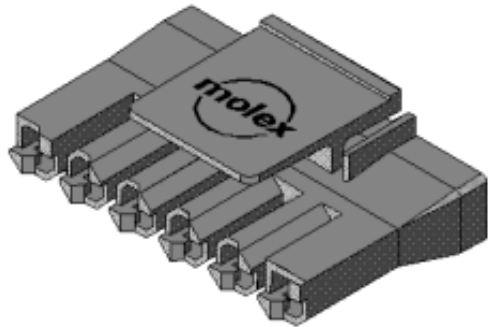

Series image - Reference only

EU RoHS

**ELV and RoHS
Compliant**
**REACH SVHC
Contains SVHC: No**
**Halogen-Free
Status**

China RoHS



Not Reviewed

**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series

[44441](#) Series

Mates With

[43680-1004](#) Plug Housing. [43160](#) 4 Circuit,
UL 94V-2 Vertical or Right Angle Headers.
[46007](#) 4 Circuit, UL 94V-2 Right Angle, UL
1950 Finger Proof Safe Headers

Use With

[43375](#) Female Crimp Terminals