

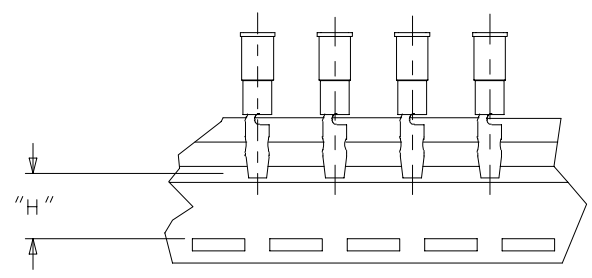


	10	9	8	7	6	5	4	3	2	19035		
F	LOOSE PIECE		TAPE MOUNTED		WIRE RANGE AWG	INSULATION COLOR	I.D. MIN.	PLUG DIA.	MAX "L"	"MWID"	"H" ±. 01 Ø/Ø. 25	F
	MATERIAL NO.	ENG. NO.	MATERIAL NO.	ENG. NO.								
	190350001	A-559	190350002	A-559T	18-22	RED	.056/1.42	.180/4.57	1.046/26.57	.140/3.56	.495/12.57	
	190350003	A-569	190350004	A-569T	18-22	RED	.056/1.42	.156/3.96	.986/25.04	.140/3.56	.555/14.10	
	190350005	B-579	190350008	B-579T	14-16	BLUE	.084/2.13	.180/4.57	1.046/26.57	.170/4.32	.495/12.57	
	190350009	B-589	190350012	B-589T	14-16	BLUE	.084/2.13	.156/3.96	.986/25.04	.170/4.32	.555/14.10	

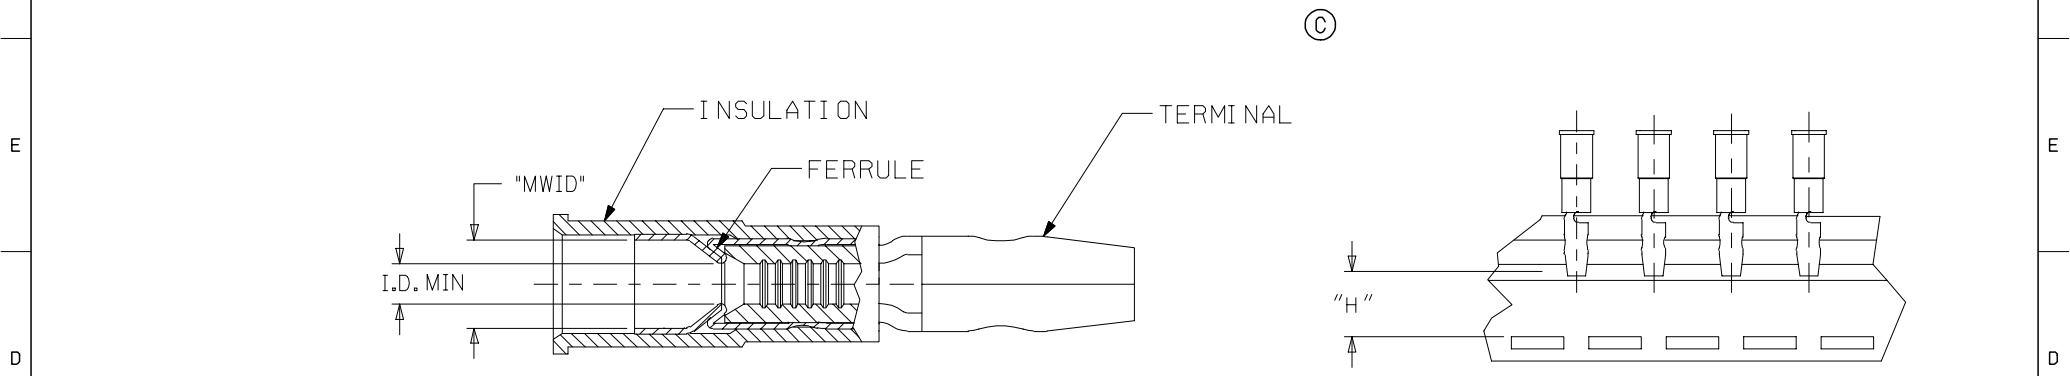

TAPE MOUNTING DETAIL

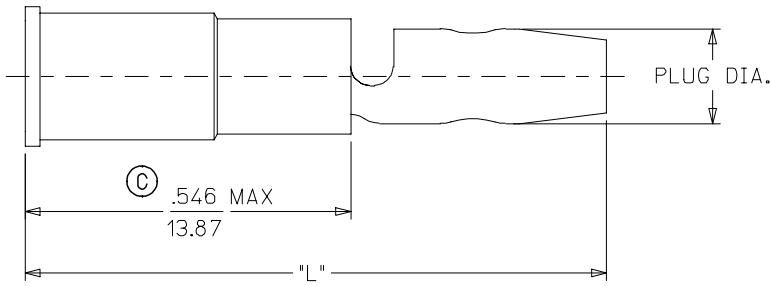

SALES DRAWING

- NOTE:
1. TERMINAL: MATERIAL COPPER .032 MAX
FINISH: ELECTRO-TIN.
FERRULE : MATERIAL: BRASS
FINISH: ELECTRO-TIN.
INSULATION: NYLON.
 2. MWID = MAXIMUM WIRE INSULATION DIAMETER.
 3. ASSEMBLY IS ROHS COMPLIANT.

CORRECTED DIM. & ADDED ROHS EC NO: ET2007-0397 DRW: NEHLE 2007/04/27 CHKD: JMACNEIL 2007/05/09 APPR: JMACNEIL 2007/05/10			DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE ---	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION
					mm	INCH	DRAWN BY	DATE	TITLE			
					4 PLACES ± --- ± ---	BRE	2003/02/13	MALE BULLET SNAP PLUG, MOLDED, AVIKRIMP				
					3 PLACES ± --- ± .005	CHECKED BY	DATE					
			2 PLACES ± 0.13 ± .01	HEB	2003/02/13							
			1 PLACE ± 0.25 ± ---	APPROVED BY	DATE							
			ANGULAR ±1/2°	RWD	2003/02/13	MOLEX MOLEX INCORPORATED						
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO.		DOCUMENT NO.		SHEET NO.				
				SEE CHART		SD-19035-001		1 OF 1				
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								