

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

22-28-2109

Status:

Active

Overview:

KK® Interconnection System

Description:

2.54mm Pitch KK® Header, Breakaway, Right Angle, with Plastic Polarizing Peg, 10 Circuits, 0.76µm Gold (Au) Selective Plating, with Backwalls Removed

Documents:	
3D Model	Product Specification PS-10-07 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	PCB Headers
Series	42226
Application	Signal, Wire-to-Board
Application Tooling Part Link	011201230
Comments	Backwalls Removed
Overview	KK® Interconnection System
Product Name	KK®
UPC	800753809093
Physical	
Breakaway	Yes
Circuits (Loaded)	10
Circuits (maximum)	10
Color - Resin	Black
Durability (mating cycles max)	100
Flammability	94V-0
Glow-Wire Compliant	No
Lock to Mating Part	None
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Nylon
Net Weight	1.474/g
Number of Rows	1
Orientation	Right Angle
PC Tail Length	3.05mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Bag
Pitch - Mating Interface	2.54mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Stackable	No
Temperature Range - Operating	See Product Specification
Termination Interface: Style	Through Hole

Electrical

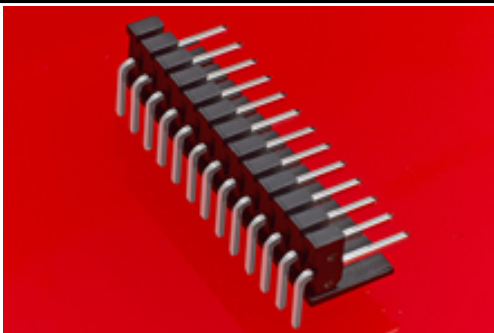


image - Reference onlySeries

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Low-Halogen Status

Not Low-Halogen

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

42226Series

Mates With

KK® Crimp Housing [2695](#) , [6471](#) , [7880](#) ,
KK® PC Board Connector [4455](#)

Current - Maximum per Contact	4A
Voltage - Maximum	250V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	5
Lead-free Process Capability	Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	235
Material Info	
Old Part Number	42226-0290
Reference - Drawing Numbers	
Product Specification	PS-10-07
Sales Drawing	SD-42226-001, SD-42226-002

This document was generated on 02/22/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION