

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

22-28-8053

Status:


Active

Overview:

KK® Interconnection System

Description:

2.54mm Pitch KK® Header, Breakaway, Right Angle Surface Mount Compatible, 5 Circuits, 0.38µm Gold (Au) Selective Plating, Mating Pin Length 8.23mm

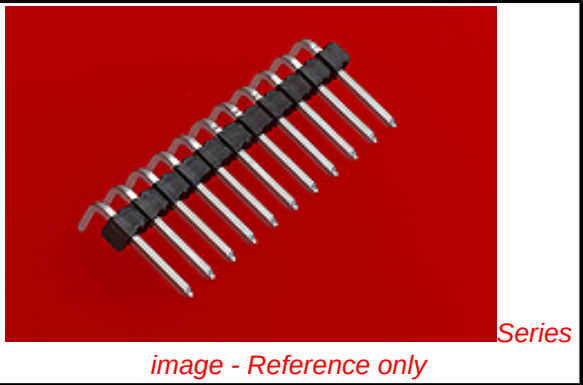

Documents:

[3D Model](#)

[Drawing \(PDF\)](#)

[Product Specification PS-10-07 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

PCB Headers

Series

42377

Application

Board-to-Board, Signal, Wire-to-Board

Application Tooling Part Link

11-20-1230

Overview

KK® Interconnection System

Product Name

KK®

UPC

800753811836

Physical

Breakaway

Yes

Circuits (Loaded)

5

Circuits (maximum)

5

Color - Resin

Black

Durability (mating cycles max)

100

Flammability

94V-0

Glow-Wire Compliant

No

Lock to Mating Part

None

Material - Metal

Brass

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

High Temperature Thermoplastic

Net Weight

0.388/g

Number of Rows

1

Orientation

Right Angle

PC Tail Length

3.05mm

PCB Locator

No

PCB Retention

None

PCB Thickness - Recommended

1.60mm

Packaging Type

Bag

Pitch - Mating Interface

2.54mm

Plating min - Mating

0.381µm

Plating min - Termination

2.540µm

Polarized to Mating Part

Yes

Polarized to PCB

No

Shrouded

Partial

Stackable

No

Surface Mount Compatible (SMC)

Yes

Temperature Range - Operating

See Product Specification

Termination Interface: Style

Through Hole

Electrical

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Not Reviewed

Low-Halogen Status

Not Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

42377Series

Mates With

KK® Crimp Housing 2695 , 6471 , 7880 ,
KK® PC Board Connector 4455

Current - Maximum per Contact	4A
Voltage - Maximum	250V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	5
Lead-free Process Capability	Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	235
Material Info	
Old Part Number	42377-0110
Reference - Drawing Numbers	
Product Specification	PS-10-07
Sales Drawing	SD-42377-001

This document was generated on 06/25/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION