


No. of Contacts	DIMENSIONS		REMARK (備註)
	A	B	
08	3.00	4.20	△
10	4.00	5.20	
12	5.00	6.20	
14	6.00	7.20	
16	7.00	8.20	⊕
18	8.00	9.20	⊕
20	9.00	10.20	⊕
22	10.00	11.20	
24	11.00	12.20	
26	12.00	13.20	
28	13.00	14.20	
30	14.00	15.20	⊕
32	15.00	16.20	
34	16.00	17.20	
36	17.00	18.20	
38	18.00	19.20	
40	19.00	20.20	⊕
42	20.00	21.20	
44	21.00	22.20	
46	22.00	23.20	
48	23.00	24.20	
50	24.00	25.20	⊕
52	25.00	26.20	
54	26.00	27.20	
56	27.00	28.20	
58	28.00	29.20	
60	29.00	30.20	⊕
62	30.00	31.20	⊕
64	31.00	32.20	⊕

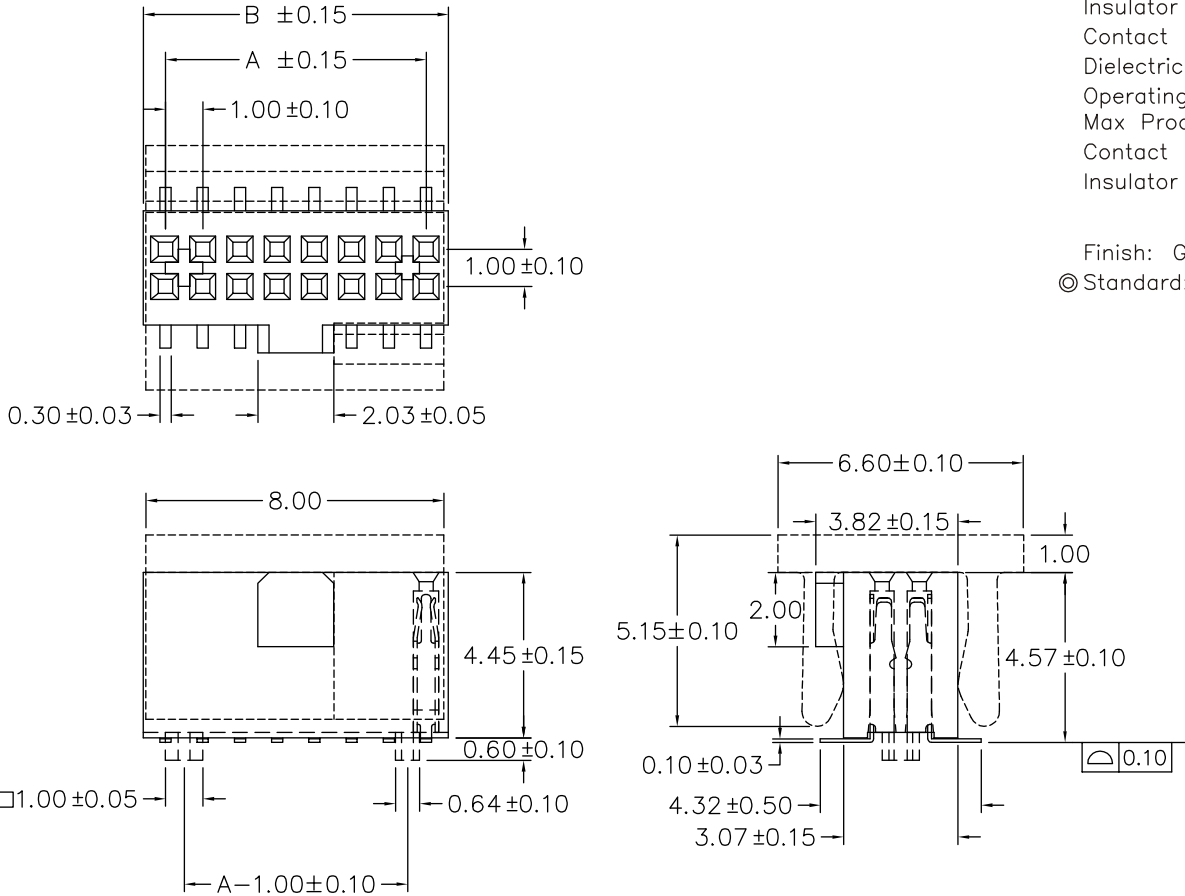

SPECIFICATIONS

Current Rating: 1 Amp
Insulator resistance: 5000 Megohms min.
Contact resistance: 20 m ohms max.
Dielectric withstanding: AC 500 V
Operating Temperature: -40°~+105°C
Max Processing Temp: 230° for 30 seconds
Contact Material: Phosphor Bronze.
Insulator Material: High Temperature Thermoplastic, UL 94V-0 (Nylon-6T)
Color : Black

Finish: Gold plated
◎ Standard: Gold flash all over

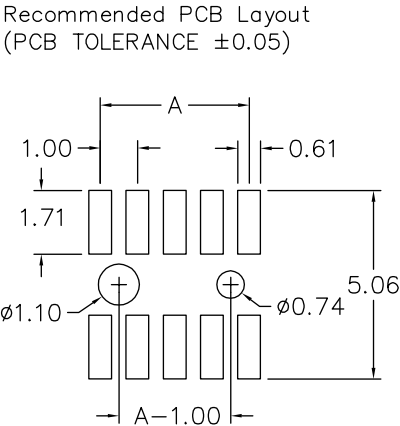


Diagram	Molding description
○	mass production & assemble mold
◎	sample & assemble mold
⊕	mass production & fix mold
⊕	sample & fix mold



煜倫有限公司

PART NO. F-10K-VPC-2Xxx									
DWG NO. F-10K-VPC-2Xxx		CHECKED BY CY		TOLERANCES ARE .X ± .XX ± .XXX ± AWG	DESCRIP TION:		1.0X1.0mm SMD SOCKET		
FILE NO.		DRAWING BY							
UNIT / mm	SCALE 1:1	PROJECTION			AREA		REVISIONS	HK	DATE