


Female Header SMD 2,54 mm

Series

098

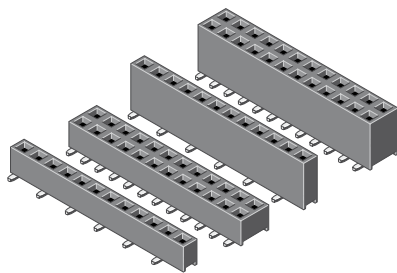


Rated current	3,0 A
Rated voltage	250 V _{RMS} / V _{DC}
	Please consider air- and creepage distances
Withstand voltage	500 V _{RMS} for one minute
Material contact	Phosphor bronze
Material insulator	High temp. thermoplast UL94V-0
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds

All dimensions in mm.

pitch	2,54
termination	
mating pin size	□ 0,64
max. pincount	040 / 080


Variation

Layout A

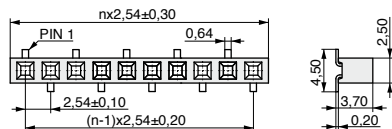


1

Layout B

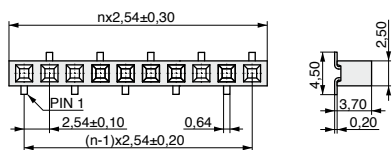


2

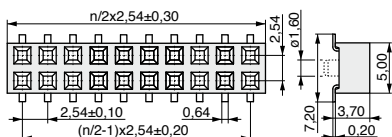


3

Layout A

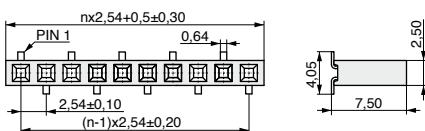


4

Layout B






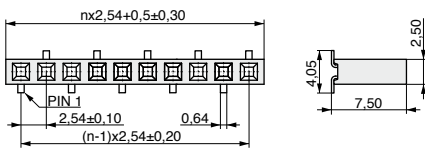


5

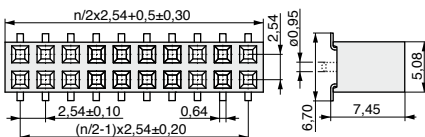

6

PCB Layout



Positioning peg: 0 = Without, 1 = With
 Plating: T = Sn, F = Au
 Packaging: R = Reel, T = Tube
 Cap: 0 = Without, 1 = With

* No. of contacts:

Variation 1 = 002 - 040
 Variation 2 = 002 - 040
 Variation 3 = 004 - 080
 Variation 4 = 002 - 040
 Variation 5 = 002 - 040
 Variation 6 = 004 - 080

Variation (1,2,3,...)

No. of contacts *
(002,... - 080)

Positioning peg (0,1)

Plating contact (T,F)

Packaging (R,T)

Cap (0,1)



www.mpe-connector.de

Order code:

098-2-2-2-2-N-X-Y-2-2

Mating series	087	089	090	585	088	334	368	296												
see page	3-37	3-38	3-39	3-40	3-41	3-42	3-43	3-53												