


Female Header Dual Entry 2,54 mm

Series

097

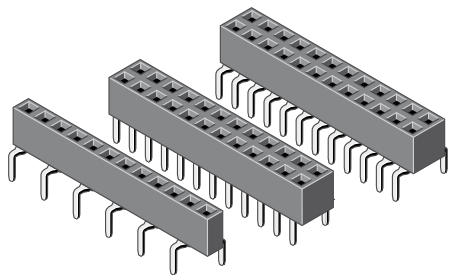

Rated current	3,0 A
Rated voltage	250 V _{RMS} / V _{DC} Please consider air- and creepage distances
Withstand voltage	500 V _{RMS} for one minute
Material contact	Phosphor bronze
Material insulator	High temp. thermoplast UL94V-0
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds

All dimensions in mm.

pitch
2,54

termination


mating pin
size

☐ 0.64

max.
pincount
040 / 080


Variation

Layout A

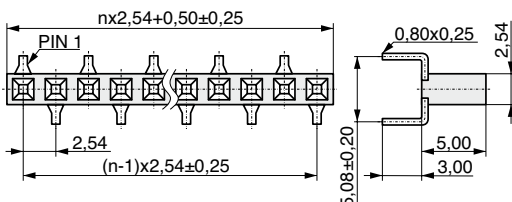


1


Layout B

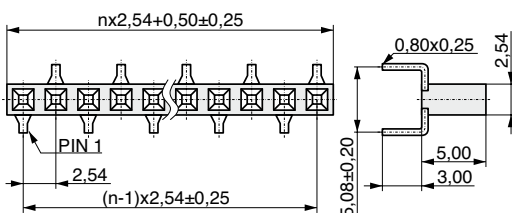


2

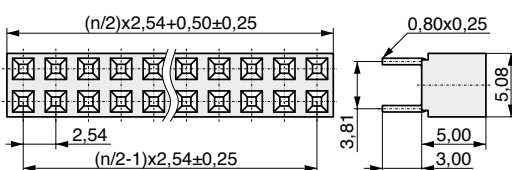

3

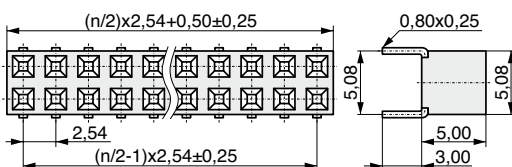

4

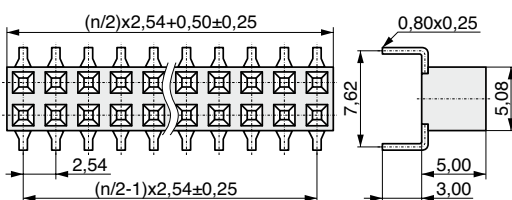

5

Plating:
T = Sn
F = Au
S = Selective Au

Packaging:
T = Tube

* No. of contacts:

Variation 1 = 002 - 040
Variation 2 = 002 - 040
Variation 3 = 004 - 080
Variation 4 = 004 - 080
Variation 5 = 004 - 080

Variation (1,2,3,...)

No. of contacts
(002,... - 080) *

Plating contact (T,F,S)

Packaging



www.mpe-connector.de

CS170611 V2

Order code:

0	9	7	-	?	-	?	?	?	-	0	-	N	?	X	-	X	T	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Mating series	087	089	090	585	088	334	368	296
see page	3-37	3-38	3-39	3-40	3-41	3-42	3-43	3-53