


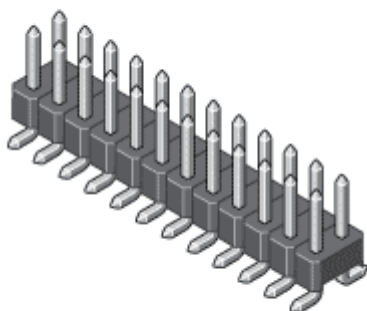


© MPE-GARRY

Straight SMD pin headers 2,54 mm pitch and 0,64 mm square pins, with gull-wing terminations. Many different pin length and plating options as standard. Customized connectors possible.

Double row

Pitch (mm)	2,54
Mating contact size	sq. 0,64
No of contacts	16
Positioning peg	Without positioning peg
Polarising	No
Locking	No
Material contact	Copper alloy
Plating contact	Selective Au (min 5 mm on mating side)
Material insulator	High temp. thermoplast UL94V-0
Rated current	3,0 A
Rated voltage	250 V _{RMS} / V _{DC} Please consider air- and creepage distances
Withstand voltage	500 V _{RMS} for 1 minute
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds
Packaging	Tube
Cap	Without cap
A (Length)	9,10
B (Mating)	5,30

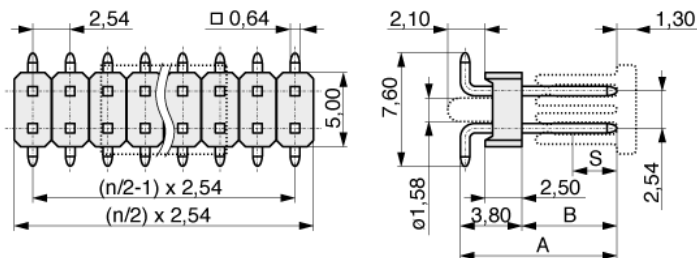

Footprint

