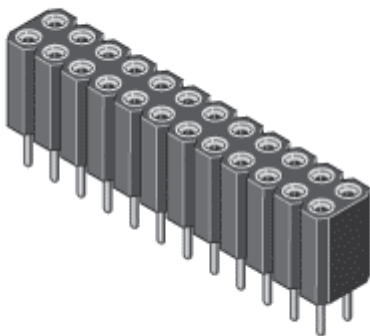


Order code: 126-2-016-0-MTF-LS0

4) FEMALE HEADER


Series: **126**

© MPE-GARRY


Straight female headers 2,54 mm pitch and precision turned contacts mating with 1,00 mm pins.

Double row.

Pitch (mm)	2,54
Mating pin size (range)	ø 0,95-1,05
No of contacts	16
Polarising	No
Locking	No
Clip style	6 finger clip
Material contact	Copper alloy
Material clip	Beryllium copper
Plating contact	Sn
Plating clip	Au
Material insulator	High temp. thermoplast UL94V-0
Rated current	3,0 A
Rated voltage	150 V _{RMS} / V _{DC}
Withstand voltage	500 V _{RMS} / V _{DC}
Operating temperature	-55°C to +125°C
Max. processing temper.	260°C for 10 seconds
Packaging	Standard

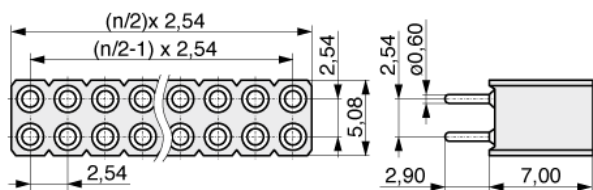

PCB layout

**Order code: 126-2-016-0-MTF-LS0**

MPE Garry GmbH
Schäfflerstraße 13
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0
Fax: +49 (0) 83 62 / 91 56-500
Email: vk@mpe-connector.de

Date: 23.12.2017 Internet: http://www.mpe-connector.de/index.php?lang=en&menu=16&s_product=126-2-016-0-MTF-LS0