




Socket connectors

374

374-1

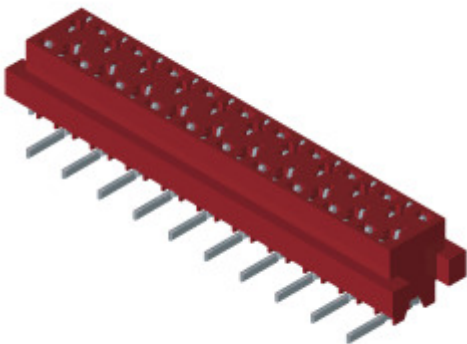

Material insulator	High temp. thermoplast UL94V-0
Plating contact	Sn
Packaging	Reel
Board termination	 SMD Gull Wing
Material contact	Phosphor bronze
Rated current	1,0 A
Rated voltage	230 V RMS / V DC
Withstand voltage	500 V RMS for 1 Minute
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds
Pincount	6
Orientation to PCB	 Vertical
No of rows	2
Pitch (mm)	1,27
Cap	With cap
AWG	28
Polarising	Yes
Locking	No
Contact style	Die cut
Socket layout	 DIL strip (Dual-in-line)
A (Length)	9,70

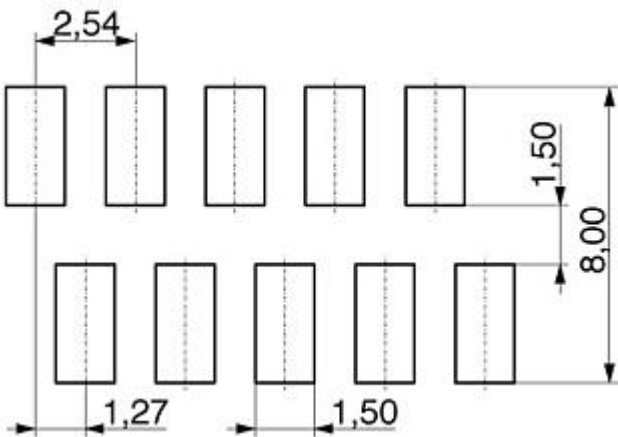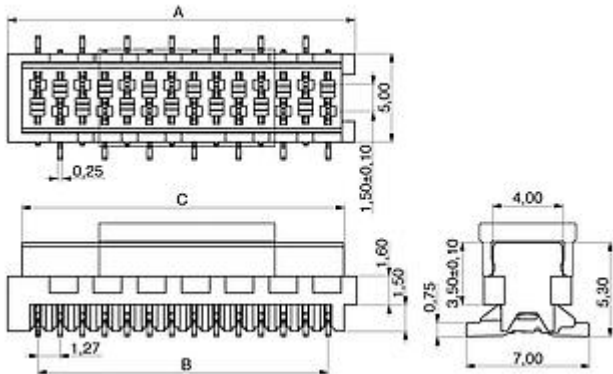

MPE Garry GmbH
Schäfflerstraße 13
87629 Füssen/Germany

Telefon: +49 (0) 83 62 / 91 56-0
Fax: +49 (0) 83 62 / 91 56-500
E-Mail: vk@mpe-connector.de