


Female Header Press Fit with Turned Contacts 2,00 mm

Series

173

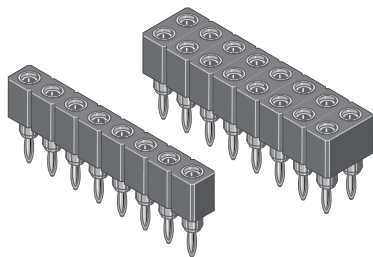

Rated current	3,0 A
Rated voltage	150 V _{RMS} / V _{DC}
Withstand voltage	500 V _{RMS} for one minute
Material contact	Copper alloy
Material clip	Beryllium copper
Material insulator	High temp. thermoplast UL94V-0
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds

All dimensions in mm.

pitch
2,00


termination

mating pin
size


Ø 0,40-0,65
□ 0,50

max.
pincount
050 / 100

Variation





1

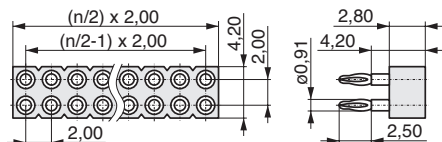

2

PCB Layout



Clip style: Plating:
S = 4 finger clip T = Sn
 F = Au
 H = Au 0.75 μ

* No. of contacts:
Variation 1 = 002 - 050
Variation 2 = 004 - 100

Variation (1,2)

No. of contacts
(002,... - 100)

Clip style

Plating contact

Plating clip (F,H)



www.mpe-connector.de

Order code:

1	7	3	-	?	-	?	?	?	-	0	-	S	T	?	-	L	S	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

[illegible]