


Pin Header Right Angled 2,00 mm

Series

332

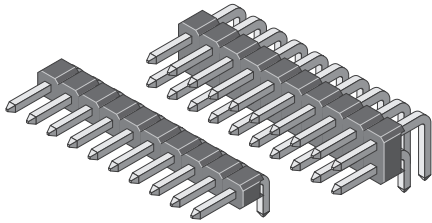

Rated current	1,5 A
Rated voltage	150 V _{RMS} / V _{DC}
Withstand voltage	500 V _{RMS} for one minute
Material contact	Copper alloy
Material insulator	High temp. thermoplast UL94V-0
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds


pitch	2,00
termination	
contact size	□ 0,50
max. pincount	040 / 080

All dimensions in mm.



Product group
3

Variation



PCB Layout

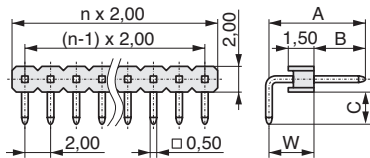



1

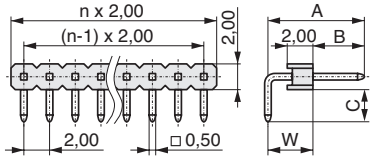


2

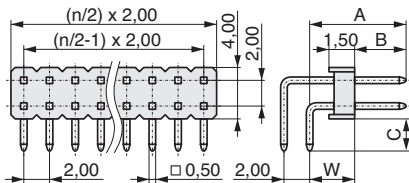

3

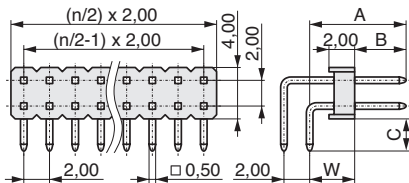

4



see figure left	see figure left	see figure left	see figure left	available in variation		
A	B	C	W	1	3	
5,65	3,80	2,50	1,85	1	3	
7,13	4,00	2,45	3,13	1	3	
7,00	4,00	2,50	3,00	1	3	
7,02	4,00	2,85	3,02	1	3	
7,13	4,00	2,45	3,13	2	4	
7,00	4,00	2,50	3,00	2	4	
7,02	4,00	2,85	3,02	2	4	

Plating:

T = Sn
F = Au
S = Selective Au

* No. of contacts:

Variation 1 = 002 - 040
Variation 2 = 002 - 040
Variation 3 = 004 - 080
Variation 4 = 004 - 080

Variation (1,2,3,4)

No. of contacts *
(002,... - 080)

Plating contact (T,F,S)

A (1/100 mm)
e.g. 1000 = 10,00 mm



www.mpe-connector.de

Order code:

332-?-?-?-?-0-?-?-XS0-?-?-?-?

Mating series	156	159	422	158	413	160
see page	4-14	4-15	4-16	4-17	4-18	6-8