

Pin Header SMD 1,27 mm

Series

307

pitch

1,27

termination



contact size

□ 0,40


max. pincount

031 / 062





Rated current	1,0 A
Rated voltage	100 V _{RMS} / V _{DC}
Withstand voltage	300 V _{RMS} for one minute
Material contact	Copper alloy
Material insulator	High temp. thermoplast UL94V-0
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds

All dimensions in mm.

Variation

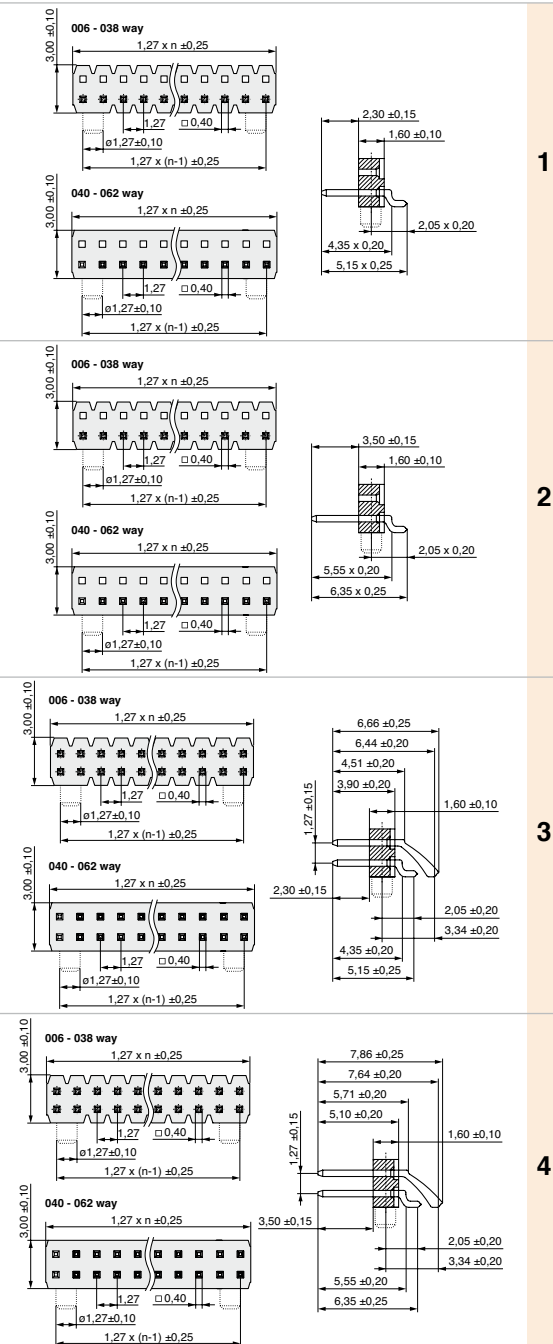

PCB Layout



Positioning peg:	Plating:	Packaging:
0 = Without peg	T = Sn	R = Reel
1 = With peg	F = Au	T = Tube

* No. of contacts:

Variation 1 = 003 - 031

Variation 2 = 003 - 031

Variation 3 = 006 - 062

Variation 4 = 006 - 062

Cap:

0 = Without cap

1 = With cap

Variation (1,2,3,4)

No. of contacts *
(003,... - 062)

Positioning peg (0,1)

Plating (T,F)

Packaging (R,T)

Cap (0,1)

Order code:

307- - - - - R - - - -



www.mpe-connector.de

Mating series	187	184	185	349	200	204	208
see page	4-5	4-6	4-7	4-8	4-9	4-10	4-11