


Female Header SMD 2,00 mm

Series

422

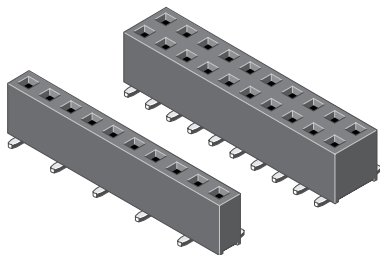

Rated current	1,5 A
Rated voltage	150 V _{RMS} / V _{DC}
Withstand voltage	500 V _{RMS} for one minute
Material contact	Phosphor bronze
Material insulator	High temp. thermoplast UL94V-0
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds

pitch
2,00

termination



mating pin
size


□ 0,50

max.
pincount
030/060/080

All dimensions in mm.


Variation

Layout A

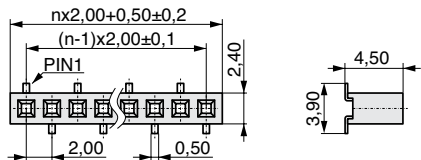


1

Layout B

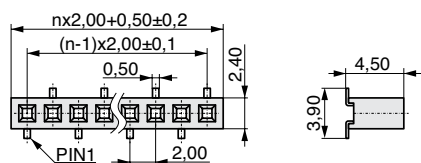


2

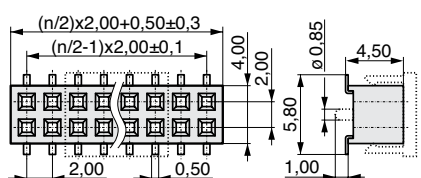


3

Layout A

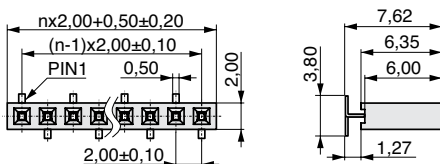


4

Layout B






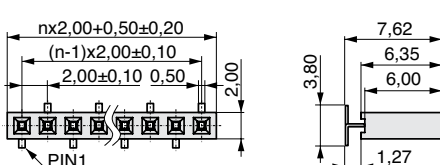


5

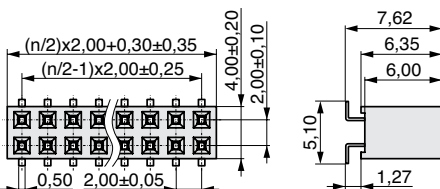

6

PCB Layout



Positioning peg:

0 = Without peg

1 = With peg

Plating:

T = Sn

F = Au

Packaging:

R = Reel

T = Tube

* No. of contacts:

Variation 1 = 002 - 040 Variation 4 = 002 - 030

Variation 2 = 002 - 040 Variation 5 = 002 - 030

Variation 3 = 004 - 080 Variation 6 = 004 - 060

Cap:

0 = Without cap

1 = With cap

Variation (1,2,3,...)

No. of contacts *
(002,... - 080)

Positioning peg (0,1)

Plating contact (T,F)

Packaging (R,T)

Cap (0,1)



www.mpe-connector.de

Order code:

4 2 2 - 2 - 2 2 2 - 2 - N 2 X - K 2 2

Mating series	150	152	151	337	332	333	155
see page	3-25	3-26	3-27	3-28	3-29	3-30	3-33