


Pin Header 3,00 mm

Series

437

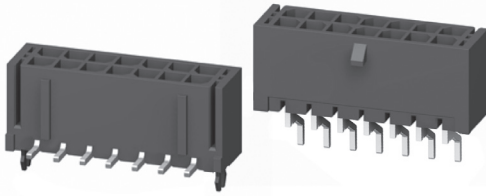


Rated current	5,0 A
Rated voltage	250 V _{RMS} / V _{DC}
Withstand voltage	1500 V _{RMS} for one minute
Material contact	Copper alloy
Material insulator	High temp. thermoplast UL94V-0
Operating temperature	-25°C to +105°C
Max. processing temper.	260°C for 10 seconds

All dimensions in mm.


pitch	3,00
termination	
contact size	□ 0,64
max. pincount	024

Product group
3


Variation

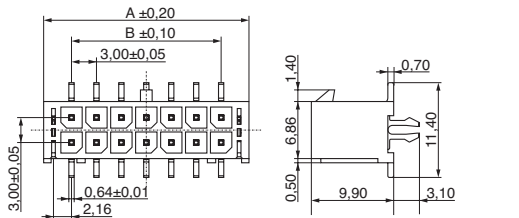


1

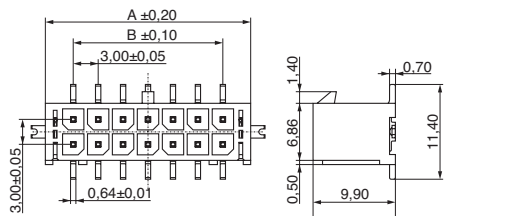


2

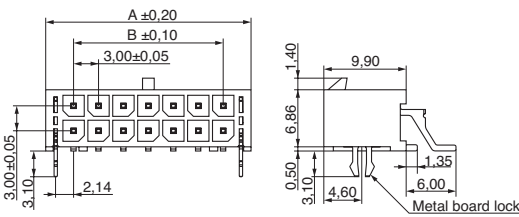

3

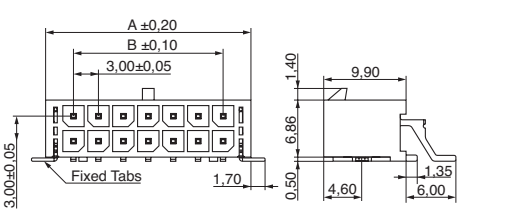

4

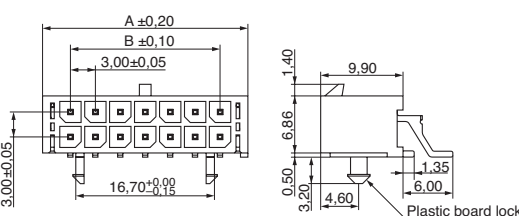

5

Positioning peg:
0 = Without peg
(for variation 2 and 4)
1 = With peg
(for variation 1, 3 and 5)

Plating:
T = Sn






Variation (1,2,3,4,5)

No. of contacts

Positioning peg (0,1)

Plating contact

PCB Layout



no. of contacts	see figure left	see figure left	available in variation				
n	A	B	1	2	3	4	5
002	6,70	-					
004	9,70	3,00					
006	12,70	6,00					
008	15,70	9,00					
010	18,70	12,00					
012	21,70	15,00					
014	24,70	18,00					
016	27,70	21,00					
018	30,70	24,00					
020	33,70	27,00					
022	36,70	30,00					
024	39,70	33,00					



www.mpe-connector.de

Order code:

437-?-?-?-?-T-KS0

Mating series
see page

433
6-13