


Pin Header SMD Shrouded 1,27 mm

Series

361

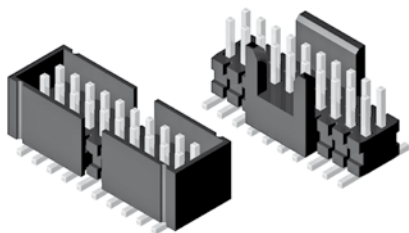


Rated current	1,0 A
Rated voltage	100 V _{RMS} / V _{DC}
Withstand voltage	300 V _{RMS} for one minute
Material contact	Copper alloy
Material insulator	High temp. thermoplast UL94V-0
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds

All dimensions in mm.


pitch	1,27
termination	
contact size	□ 0,40
max. pincount	050 / 100

Product group
3


Variation

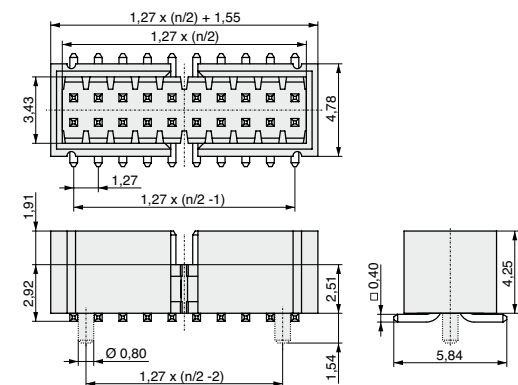

1



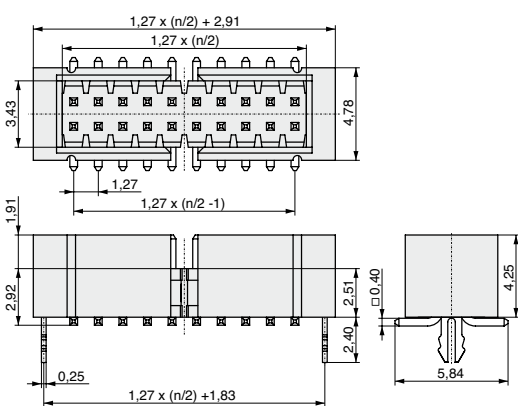


2

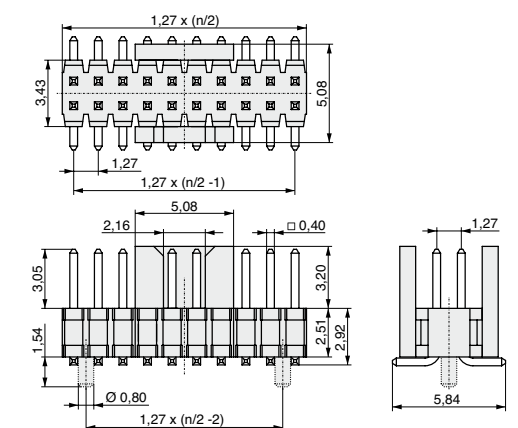

3

PCB Layout



Positioning peg:	Plating:	Packaging:
0 = Without peg	T = Sn	R = Reel
1 = With peg	F = Au	T = Tube
	S = Selective Au	

* No. of contacts:	Cap:
Variation 1 = 018 - 100	0 = Without cap
Variation 2 = 018 - 100	1 = With cap
Variation 3 = 010 - 050	

Variation (1,2,3)

No. of contacts *
(010,... - 100)

Positioning peg (0,1)

Plating contact (T,F,S)

Packaging (R,T)

Cap (0,1)



www.mpe-connector.de

Order code:

361 - - - - - R - - - - -

Mating series	187	185	349	200	204	208
see page	4-5	4-7	4-8	4-9	4-10	4-11