


Pin Header with Turned Contacts 1,27 mm

Series

192

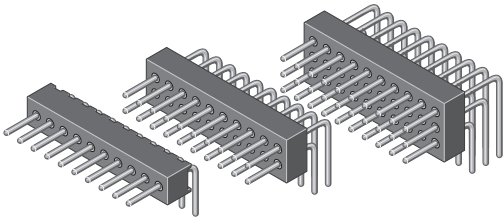

Rated current	1,0 A
Rated voltage	100 V _{RMS} / V _{DC}
Withstand voltage	300 V _{RMS} for one minute
Material contact	Copper alloy
Material insulator	High temp. thermoplast UL94V-0
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds


All dimensions in mm.

pitch	1,27
termination	
contact size	ø 0,41
max. pincount	050/100/150



Product group
3

Variation



PCB Layout

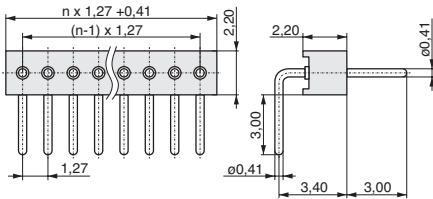



1

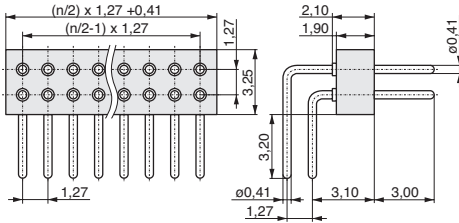


2

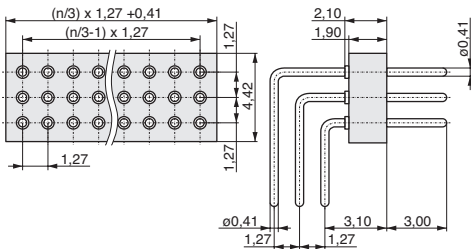

3

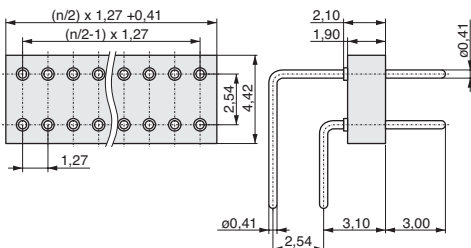

4



Plating:

T = Sn
F = Au

* No. of contacts:

Variation 1 = 002 - 050
Variation 2 = 004 - 100
Variation 3 = 009 - 150
Variation 4 = 004 - 100

Variation (1,2,3,4)

No. of contacts *
(002,... - 150)

Plating contact (T,F)



www.mpe-connector.de

Order code:

192 - 2 - 002 - 0 - 2 - LS0

Mating series	200	204	208
see page	4-9	4-10	4-11