


Micro T Pin Header 1,27 mm

Series

386

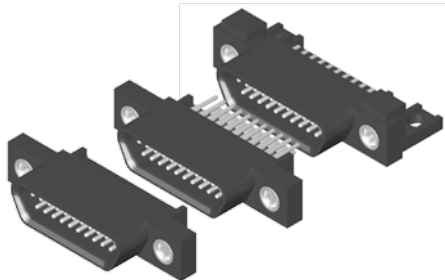

Rated current	3,0 A
Rated voltage	100 V _{RMS} / V _{DC}
Withstand voltage	500 V _{RMS} for 1 minute
Material contact	Copper alloy
Material insulator	Thermoplast UL94V-0
Operating temperature	-40°C to +105°C
Max. processing temper.	230°C for 5 seconds

All dimensions in mm.

pitch

1,27

termination




cable
termination
solder cup

max.
pincount
037


Variation

Solder cup

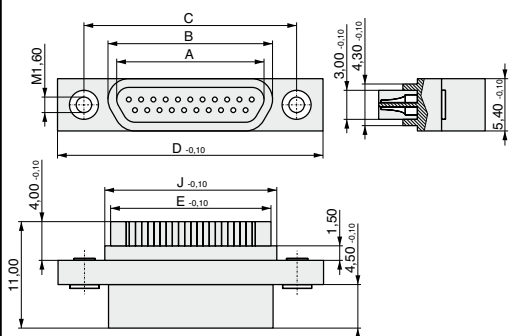


1

PCB straight

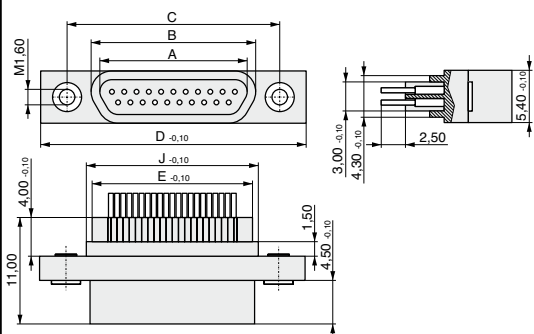



2

PCB right angled

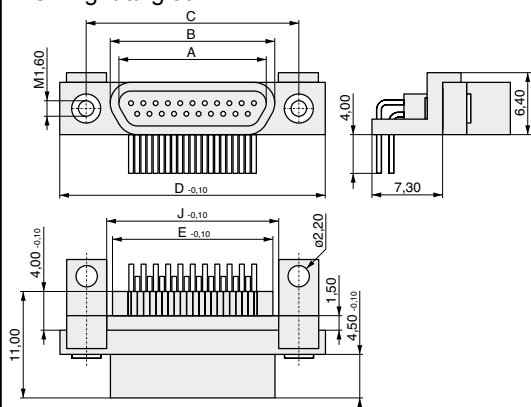

3

PCB Layout



no. of contacts	see figure left	see figure left	see figure left	see figure left	see figure left	see figure left	available in variation
n	A	B	C	D	E	J	
009	7,62	9,52	14,35	19,81	8,95	10,15	1 2 3
015	11,43	13,33	18,16	23,62	12,76	13,96	1 2 3
021	15,24	17,14	21,97	27,43	16,57	17,77	1 2 3
025	17,78	19,68	24,51	29,97	19,11	20,31	1 2 3
031	21,59	23,49	28,32	33,78	22,92	24,12	1 2 3
037	25,40	27,30	32,13	37,59	26,73	27,93	1 2 3

Variation (1,2,3)

No. of contacts



Order code:

386-2-222-ZS0

Mating series
see page

387
11-3