


Pin Header Shrouded 1,27 mm

Series

180

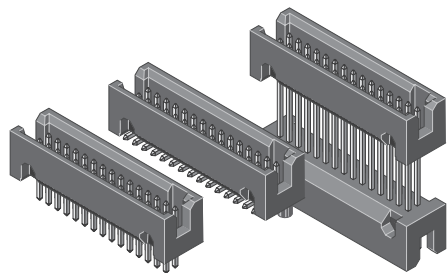


Rated current	1,0 A
Rated voltage	100 V _{RMS} / V _{DC}
Withstand voltage	300 V _{RMS} for one minute
Material contact	Copper alloy
Material insulator	High temp. thermoplast UL94V-0
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds

All dimensions in mm.


pitch
1,27termination
contact
size
□ 0,40max.
pincount
100

Variation


PCB Layout

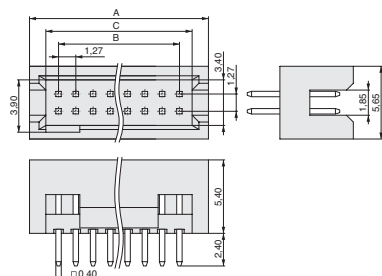


1

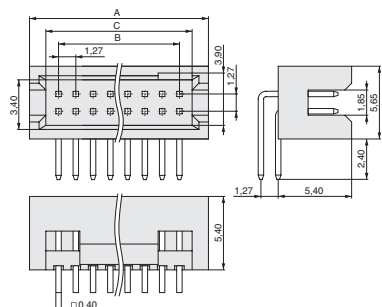

2



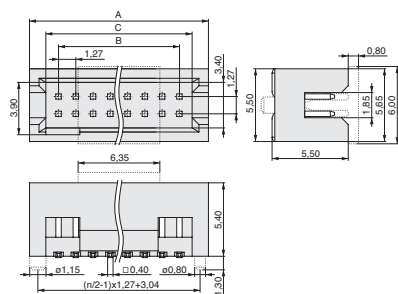


3

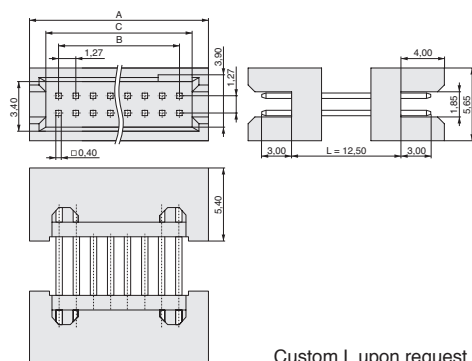

4

Custom L upon request



Positioning peg:
0 = Without peg
1 = With peg
(optional only for variation 3)

Plating:
T = Sn
F = Au
S = Selective Au

Cap:
0 = Without cap
1 = With cap
(optional only for variation 3)

Variation (1,2,3,4)

No. of contacts

Positioning peg (0,1)

Plating contact (T,F,S)

Cap (0,1)



Order code:

180-?-?-?-?-?-?-RS?

Mating series
see page

185
4-7