


**VOIDLESS-HERMETICALLY-SEALED
ULTRAFAST RECOVERY GLASS
RECTIFIERS**

 ALSO
AVAILABLE IN
SURFACE
MOUNT

DESCRIPTION

This "ultrafast recovery" rectifier diode series is military qualified to MIL-PRF-19500/477 and is ideal for high-reliability applications where a failure cannot be tolerated. These industry-recognized 6.0 Amp rated rectifiers for working peak reverse voltages from 50 to 150 volts are hermetically sealed with voidless-glass construction using an internal "Category I" metallurgical bond. These devices are also available in surface mount MELF package configurations by adding a "US" suffix (see separate data sheet for 1N5807US thru 1N5811US). Microsemi also offers numerous other rectifier products to meet higher and lower current ratings with various recovery time speed requirements including standard, fast and ultrafast device types in both through-hole and surface mount packages.

APPEARANCE

"E" Package

IMPORTANT: For the most current data, consult MICROSEMI's website: <http://www.microsemi.com>

FEATURES

- Popular JEDEC registered 1N5807 to 1N5811 series
- Voidless hermetically sealed glass package
- Extremely robust construction
- Triple-layer passivation
- Internal "Category I" Metallurgical bonds
- JAN, JANTX, JANTXV, and JANS available per MIL-PRF-19500/477
- Surface mount equivalents also available in a square end-cap MELF configuration with "US" suffix (see separate data sheet for 1N5807US thru 1N5811US)

APPLICATIONS / BENEFITS

- Ultrafast recovery 6 Amp rectifier series 50 to 150 V
- Military and other high-reliability applications
- Switching power supplies or other applications requiring extremely fast switching & low forward loss
- High forward surge current capability
- Low thermal resistance
- Controlled avalanche with peak reverse power capability
- Inherently radiation hard as described in Microsemi MicroNote 050

MAXIMUM RATINGS

- Junction Temperature: -65°C to +175°C
- Storage Temperature: -65°C to +175°C
- Average Rectified Forward Current (I_O): 6 A @ $T_L = 75^\circ\text{C}$ at 3/8 inch lead length (see note 1)
- Thermal Resistance: 22 °C/W junction to lead ($L = .375$ in)
- Thermal Impedance: 1.5 °C/W @ 10 ms heating time
- Forward Surge Current (8.3 ms half sine) 125 Amps
- Capacitance: 60 pF at 10 volts
- Solder temperature: 260°C for 10 s (maximum)

MECHANICAL AND PACKAGING

- CASE: Hermetically sealed voidless hard glass with Tungsten slugs
- TERMINATIONS: Axial-leads are Tin/Lead (Sn/Pb) over Copper except for JANS with solid Silver (Ag) and no finish
- MARKING: Body painted and part number, etc.
- POLARITY: Cathode indicated by band
- Tape & Reel option: Standard per EIA-296
- Weight: 750 mg
- See package dimensions on last page

ELECTRICAL CHARACTERISTICS

TYPE	WORKING PEAK REVERSE VOLTAGE V_{RWM}	BREAKDOWN VOLTAGE (MIN.) @ 100 μ A V_{BR}	AVERAGE RECTIFIED CURRENT I_{O1} @ $T_L = 75^\circ\text{C}$ (Note 1)	AVERAGE RECTIFIED CURRENT I_{O2} @ $T_A = 55^\circ\text{C}$ Note 2	MAXIMUM FORWARD VOLTAGE @ 4 A (8.3 ms pulse) V_F		REVERSE CURRENT (MAX) @ V_{RWM} I_R		SURGE CURRENT (MAX) I_{FSM} (NOTE 3)	REVERSE RECOVERY TIME (MAX) (NOTE 4) t_{rr}
	VOLTS	VOLTS	AMPS		VOLTS		μ A		AMPS	ns
					25°C	100°C	25°C	100°C		
1N5807	50	60	6.0	3.0	0.875	0.800	5	150	125	30
1N5809	100	110	6.0	3.0	0.875	0.800	5	150	125	30
1N5811	150	160	6.0	3.0	0.875	0.800	5	150	125	30

NOTE 1: Rated at $T_L = 75^\circ\text{C}$ at 3/8 inch lead length. Derate at 60 mA/°C for T_L above 75°C.

NOTE 2: Derate linearly at 25 mA/°C above $T_A = 55^\circ\text{C}$. This rating is typical for PC boards where thermal resistance from mounting point to ambient is sufficiently controlled where $T_{J(max)}$ does not exceed 175°C

NOTE 3: $T_A = 25^\circ\text{C}$ @ $I_O = 3.0$ A and V_{RWM} for ten 8.3 ms surges at 1 minute intervals

NOTE 4: $I_F = 1.0$ A, $I_{RM} = 1.0$ A, $I_{R(REC)} = 0.10$ A and $di/dt = 100$ A/ μ s min

SYMBOLS & DEFINITIONS

Symbol	Definition
V_{BR}	Minimum Breakdown Voltage: The minimum voltage the device will exhibit at a specified current.
V_{RWM}	Working Peak Reverse Voltage: The maximum peak voltage that can be applied over the operating temperature range.
V_F	Maximum Forward Voltage: The maximum forward voltage the device will exhibit at a specified current.
I_R	Maximum Leakage Current: The maximum leakage current that will flow at the specified voltage and temperature.
C	Capacitance: The capacitance in pF at a frequency of 1 MHz and specified voltage
t_{rr}	Reverse Recovery Time: The time interval between the instant the current passes through zero when changing from the forward direction to the reverse direction and a specified recovery decay point after a peak reverse current is reached.

GRAPHS

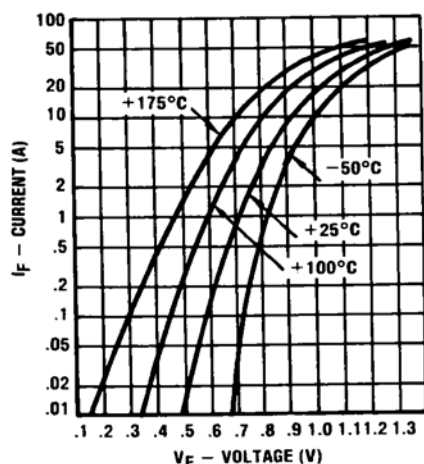


FIGURE 1
TYPICAL FORWARD CURRENT
vs. FORWARD VOLTAGE

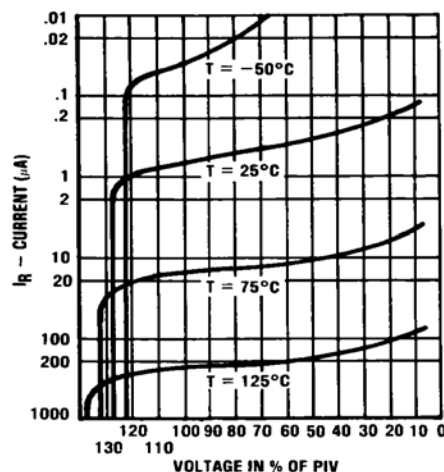


FIGURE 2
TYPICAL REVERSE CURRENT vs. VOLTAGE

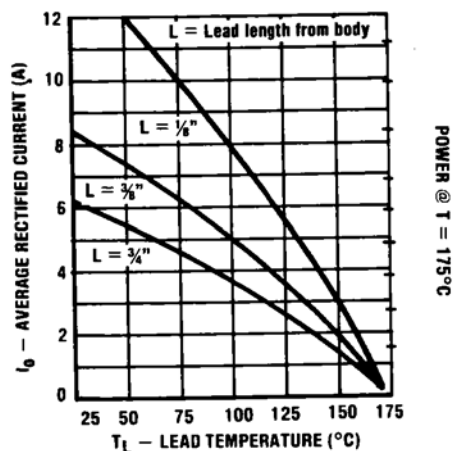


FIGURE 3
OUTPUT CURRENT vs LEAD TEMPERATURE

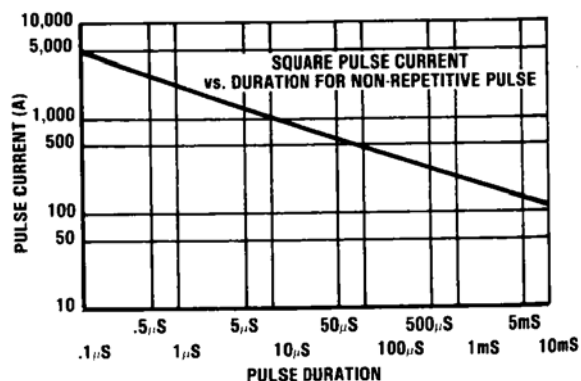


FIGURE 4
FORWARD PULSE CURRENT vs. DURATION

**VOIDLESS-HERMETICALLY-SEALED
ULTRAFAST RECOVERY GLASS
RECTIFIERS**

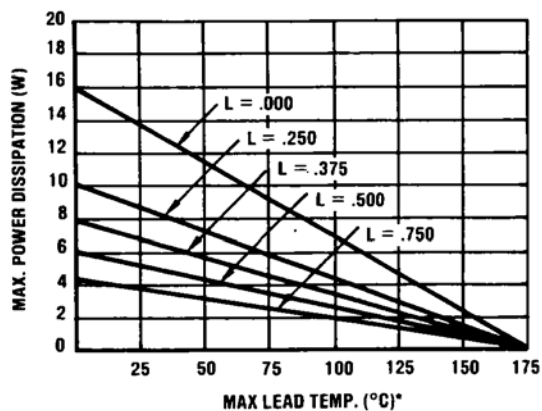


FIGURE 6
MAXIMUM LEAD TEMP. vs. PD


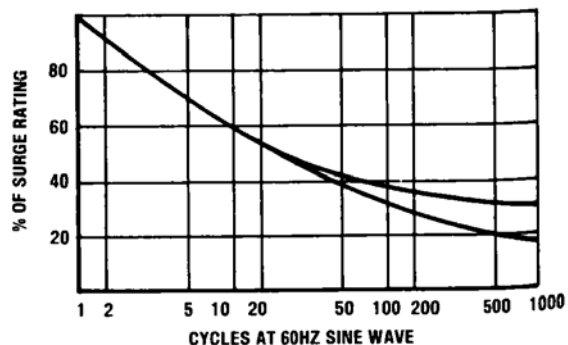


FIGURE 7
MULTIPLE SURGE CURRENT vs. DURATION

PACKAGE DIMENSIONS

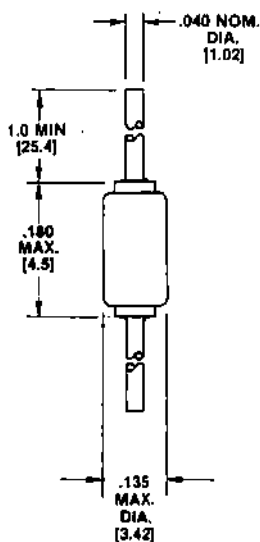

Lead Tolerance = + .002 -.003 in