


# NPN Power Silicon Transistor

## 2N4150



### Features

- Available in commercial, JAN, JANTX, JANTXV, JANS and JANSR 100K rads (Si) per MIL-PRF-19500/394
- TO-5 Package

### Maximum Ratings

Ratings	Symbol	2N4150	Units
Collector - Emitter Voltage	$V_{CEO}$	70	Vdc
Collector - Base Voltage	$V_{CBO}$	100	Vdc
Emitter - Base Voltage	$V_{EBO}$	10.0	Vdc
Collector Current	$I_C$	10.0	Adc
Total Power Dissipation @ $T_A = +25\text{ }^\circ\text{C}$ (1) @ $T_C = +25\text{ }^\circ\text{C}$ (2)	$P_T$	1.0 0.5	W W
Operating & Storage Temperature Range	$T_{op}, T_{stg}$	-65 to +200	$^\circ\text{C}$
Thermal Resistance, Junction-to-Case Junction_to-Ambient	$R_{\theta JC}$ $R_{\theta JA}$	10.0 175.0	$^\circ\text{C/W}$

1) Derate linearly @ 5.7 mW/ $^\circ\text{C}$  for  $T_A > +25\text{ }^\circ\text{C}$

2) Derate linearly @ 100 mW/ $^\circ\text{C}$  for  $T_C > +25\text{ }^\circ\text{C}$

### Electrical Characteristics ( $T_C = 25\text{ }^\circ\text{C}$ unless otherwise noted)

OFF Characteristics	Symbol	Mimimum	Maximum	Units
Collector - Emitter Breakdown Voltage $I_C = 100\text{ mAdc}$	$V_{(BR)CEO}$	70	---	Vdc
Collector - Emitter Cutoff Current $V_{BE} = 0.5\text{ Vdc}, V_{CE} = 60\text{ Vdc}$	$I_{CEX}$	---	10	$\mu\text{Adc}$
Collector - Emitter Cutoff Current $V_{CE} = 60\text{ Vdc}$	$I_{CEO}$	---	10	$\mu\text{Adc}$
Emitter - Base Cutoff Current $V_{EB} = 7.0\text{ Vdc}$ $V_{EB} = 5.0\text{ Vdc}$	$I_{EBO}$	---	10 0.1	$\mu\text{Adc}$
Collector-Base Cutoff Current $V_{CB} = 100\text{ Vdc}$ $V_{CB} = 80\text{ Vdc}$	$I_{CBO}$	---	10 0.1	$\mu\text{Adc}$




### Electrical Characteristics -con't

ON Characteristics		Symbol	Mimimum	Maximum	Units
Collector-Base Cutoff Current $I_C = 1.0 \text{ Adc}, V_{CE} = 5.0 \text{ Vdc}$ $I_C = 5.0 \text{ Adc}, V_{CE} = 5.0 \text{ Vdc}$ $I_C = 10.0 \text{ Adc}, V_{CE} = 5.0 \text{ Vdc}$		$H_{FE}$	50 40 10	200 120 ---	
Collector-Emitter Saturation Voltage $I_C = 5.0 \text{ Adc}, I_B = 0.5 \text{ Adc}$ $I_C = 10.0 \text{ Adc}, I_B = 1.0 \text{ Adc}$		$V_{CE(sat)}$	---	0.6 2.5	Vdc
Base-Emitter Saturation Voltage $I_C = 5.0 \text{ Adc}, I_B = 0.5 \text{ Adc}$ $I_C = 10.0 \text{ Adc}, I_B = 1.0 \text{ Adc}$		$V_{BE(sat)}$	---	1.5 2.5	Vdc
DYNAMIC Characteristics					
Magnitude of Common Emitter Small-Signal Short-Circuit Forward Current Transfer Ratio $I_C = 0.2 \text{ Adc}, V_{CE} = 10.0 \text{ Vdc}, f = 10 \text{ MHz}$		$ h_{fe} $	1.5	7.5	
Output Capacitance $V_{CB} = 10 \text{ Vdc}, I_E = 0, 100 \text{ kHz} \leq f \leq 1.0 \text{ MHz}$		$C_{obo}$	---	350	pF
SWITCHING Characteristics					
Delay Time	$V_{CC} = 20 \text{ Vdc}, V_{BB} = 5.0 \text{ Vdc},$	$t_d$	---	50	ns
Rise Time	$I_C = 5.0 \text{ Adc}, I_{B1} = 0.5 \text{ Adc}$	$t_r$	---	500	ns
Storage Time	$V_{CC} = 20 \text{ Vdc}, V_{BB} = 5.0 \text{ Adc},$	$t_s$	---	1.5	μs
Fall Time	$I_C = 5.0 \text{ Adc}, I_{B1} = -I_{B2} = -0.5 \text{ Adc}$	$t_f$	---	500	ns
SAFE OPERATING AREA					
<b>DC Tests:</b> $T_C = +25 \text{ }^\circ\text{C}, 1 \text{ Cycle}, t = 1.0 \text{ s}$					
<b>Test 1:</b> $V_{CE} = 40.0 \text{ Vdc}, I_C = 0.22 \text{ Adc}$					
<b>Test 2:</b> $V_{CE} = 70 \text{ Vdc}, I_C = 90 \text{ mAdc}$					

(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%.

## Outline Drawing

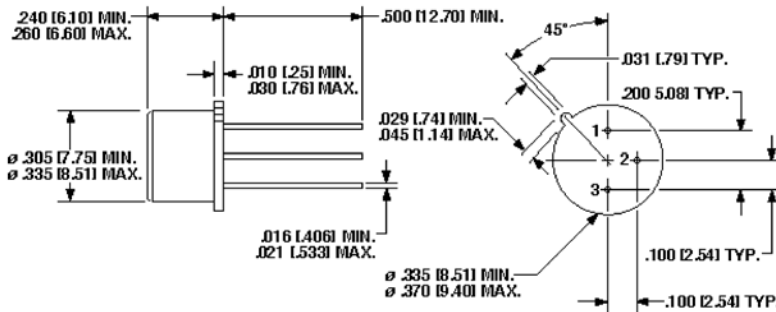

Note: All dimensions are inches [mm].

### Aeroflex / Metelics, Inc.

975 Stewart Drive,  
Sunnyvale, CA 94085  
Tel: (408) 737-8181  
Fax: (408) 733-7645

Sales: 888-641-SEMI (7364)

#### Hi-Rel Components

9 Hampshire Street,  
Lawrence, MA 01840  
Tel: (603) 641-3800  
Fax: (978) 683-3264

[www.aeroflex.com/metelics-hirelcomponents](http://www.aeroflex.com/metelics-hirelcomponents)

[www.aeroflex.com/metelics](http://www.aeroflex.com/metelics)      [metelics-sales@aeroflex.com](mailto:metelics-sales@aeroflex.com)

Aeroflex / Metelics, Inc. reserves the right to make changes to any products and services herein at any time without notice. Consult Aeroflex or an authorized sales representative to verify that the information in this data sheet is current before using this product. Aeroflex does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing by Aeroflex; nor does the purchase, lease, or use of a product or service from Aeroflex convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual rights of Aeroflex or of third parties.

Copyright 2011 Aeroflex / Metelics. All rights reserved.

### ISO 9001: 2008 certified companies



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.