

Product Search Data Sheet

Note: This datasheet may be out of date.

Please download the latest datasheet of NFZ15SG152SN10# from the official website of Murata Manufacturing Co., Ltd.


https://www.murata.com/en-global/products/productdetail?partno=NFZ15SG152SN10%23


## NFZ15SG152SN10#

"#" indicates a package specification code.

In Production RoHS REACH

< List of part numbers with package codes > NFZ15SG152SN10B NFZ15SG152SN10D

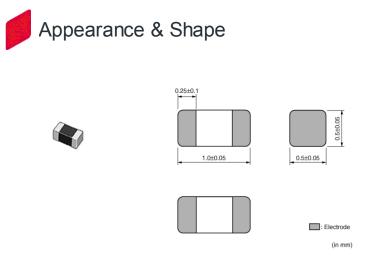



- NFZ15SG series is designed for noise suppression of audio lines such as class D amplifier. This product can suppress noise about the range from 700MHz to 2GHz without distorting audio waveform. We have set the impedance specify frequency as 900MHz in this reason.
- 2. The nickel barrier structure of the external electrodes provides excellent solder heat resistance.
- 3. Low DC resistance of NFZ15SG series meets large current. Its rated current ranges from 0.27Ato 1.1A
- 4. Meets 85°C maximum operating temperature.

Applications

Other Usage For general

### Packaging Information

Packaging	Specifications	Minimum Order Quantity
В	Bulk(Bag)	1000
D	180mm Paper Tape	10000

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering



Note: This datasheet may be out of date

Please download the latest datasheet of NFZ15SG152SN10# from the official website of Murata Manufacturing Co., Ltd.

Co., Ltd. https://www.murata.com/en-global/products/productdetail?partno=NFZ15SG152SN10%23

# NFZ15SG152SN10#

#### "#" indicates a package specification code.

# Specifications

r			
Shape	SMD	Impedance (at 1.7GHz)	1200Ω
Size Code (in mm)	1005	Impedance (at 1.7GHz) Tolerance	(Тур.)
Size Code (in inch)	0402		
Length	1.0mm		
Length Tolerance	±0.05mm		
Width	0.5mm		
Width Tolerance	±0.05mm		
Thickness	0.5mm		
Thickness Tolerance	±0.05mm		
Rated Current	400mA		
Operating Temperature Range	-40℃ to 85℃		
Mass(typ.)	0.001g		
Number of Circuit	1		
DC Resistance(max.)	0.8Ω		
DC Resistance	0.55Ω (Тур.)		
Impedance (at 900MHz)	1500Ω		
Impedance (at 900MHz) Tolerance	(Тур.)		

2 of 3

Attention
1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued
without advance notice. Please check with our sales representatives or product engineers before ordering.

without advance notice. Please check with our sales representatives or product engineers before ordering. 2.This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering



Note: This datasheet may be out of date.

Please download the latest datasheet of NFZ15SG152SN10# from the official website of Murata Manufacturing Co. Ltd.


Co., Ltd. https://www.murata.com/en-global/products/productdetail?partno=NFZ15SG152SN10%23


### NFZ15SG152SN10#

"#" indicates a package specification code.



INNOVATOR IN ELECTRONI

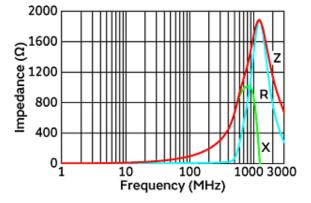

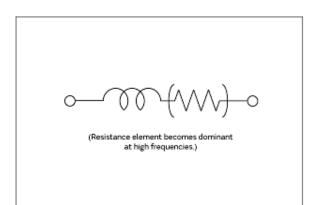

Impedance-Frequency Characteristics

Equivalent Circuit

 This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
 This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

3 of 3