

Product Search Data Sheet

Note: This datasheet may be out of date

Please download the latest datasheet of BLM03AX800SZ1# from the official website of Murata Manufacturing Co., Ltd.

https://www.murata.com/en-global/products/productdetail?partno=BLM03AX800SZ1%23

## BLM03AX800SZ1#


"#" indicates a package specification code.



< List of part numbers with package codes > BLM03AX800SZ1D BLM03AX800SZ1J BLM03AX800SZ1B



#### Appearance & Shape

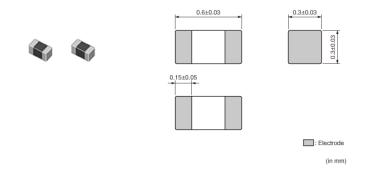



The chip ferrite beads BLM series is designed to function nearly as a resistor at noise frequencies, which greatly reduces the possibility of resonance and leaves signal wave forms undistorted. BLM series is effective in circuits without stable ground lines because BLM series does not need a connection to ground. The nickel barrier structure of the external electrodes provides excellent solder heat resistance.

BLM\_Aseries generates an impedance from the relatively low frequencies. Therefore BLM\_Aseries is effective in noise suppression in a wide frequency range (30MHz to several hundred MHz).

Applications

Automotive Usage	Infotainment
---------------------	--------------

#### Packaging Information

Packaging	Specifications	Minimum Order Quantity
D	180mm Paper Tape	15000
J	330mm Paper Tape	50000
В	Bulk(Bag)	1000

1 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering

Product Search Data Sheet

Note: This datasheet may be out of date.

Please download the latest datasheet of BLM03AX800SZ1# from the official website of Murata Manufacturing

Co., Ltd. https://www.murata.com/en-global/products/productdetail?partno=BLM03AX800SZ1%23

## BLM03AX800SZ1#

"#" indicates a package specification code.



D\_

#### SMD Shape 0603 Size Code (in mm) Size Code (in inch) 0201 Length 0.6mm Length Tolerance ±0.03mm Width 0.3mm Width Tolerance ±0.03mm Thickness 0.3mm Thickness Tolerance ±0.03mm Impedance (at 100MHz) 80Ω Impedance (at 100MHz) Tolerance ±25% 500mA Rated Current (at 85°C) Rated Current (at 125°C) 500mA DC Resistance(max.) 0.18Ω Operating Temperature Range -55℃ to 125℃ Mass(typ.) 0.0003g Number of Circuit 1

2 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering

without advance notice. Please check with our sales representatives or product engineers before ordering. 2.This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering



Note: This datasheet may be out of date.

Please download the latest datasheet of BLM03AX800SZ1# from the official website of Murata Manufacturing


Co., Ltd. https://www.murata.com/en-global/products/productdetail?partno=BLM03AX800SZ1%23

# BLM03AX800SZ1#

"#" indicates a package specification code.







(Resistance element becomes dominant at high frequencies.)

Impedance-Frequency Characteristics

Equivalent Circuit

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. 2.This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering

3 of 3