

Surface Mount Aluminum Electrolytic Capacitors NAZU Series

FEATURES

- CYLINDRICAL V-CHIP CONSTRUCTION FOR SURFACE MOUNTING
 - LOW IMPEDANCE AT 100KHz
 - EXTENDED LOAD LIFE (3,000 @ +105°C)
 - DESIGNED FOR 260°C REFLOW SOLDERING
 - **MEETS THE REQUIREMENTS OF AEC-Q200***
- *Contact NIC for supporting test data

SAC Alloy Compatible
230°C ~ 260°C

RoHS Compliant
includes all homogeneous materials



*See Part Number System for Details


CHARACTERISTICS

Rated Voltage Rating	6.3 ~ 50Vdc						
Rated Capacitance Range	10 ~ 330μF						
Operating Temp. Range	-40 ~ +105°C						
Capacitance Tolerance	±20% (M)						
Max. Leakage Current After 2 Minutes @ 20°C	0.01CV or 3μA whichever is greater						
Tan δ @ 120Hz/20°C	W.V. (Vdc)	6.3	10	16	25	35	50
	S.V. (Vdc)	8.0	13	20	32	44	63
	Tan δ	0.28	0.24	0.22	0.16	0.13	0.12
Low Temperature Stability Impedance Ratio @ 120Hz	W.V. (Vdc)	6.3	10	16	25	35	50
	Z-25°C/Z+20°C	4	3	2	2	2	2
	Z-40°C/Z+20°C	10	7	5	3	3	3
Load Life Test @ 105°C at Rated Working Voltage 3,000 hrs	Capacitance Change	Within ±30% of initial measured value					
	Tan δ	Less than ±300% of the specified maximum value					
	Leakage Current	Less than the specified maximum value					

LOW ESR COMPONENT
LIQUID ELECTROLYTE
For Performance Data see www.LowESR.com


STANDARD VALUES AND CASE SIZES (mm)

Cap (μF)	Code	Working Voltage (Vdc)					
		6.3	10	16	25	35	50
10	100	-	-	-	-	5x6.3	6.3x6.3
22	220	-	-	5x6.3	5x6.3	6.3x6.3	6.3x6.3
33	330	-	5x6.3	-	6.3x6.3	-	6.3x8
47	470	5x6.3	5x6.3	6.3x6.3	6.3x6.3	6.3x8	-
100	101	6.3x6.3	6.3x6.3	6.3x6.3	6.3x8	-	-
150	151	-	6.3x6.3	6.3x8	-	-	-
220	221	6.3x8	-	6.3x8	-	-	-
330	331	6.3x8	-	-	-	-	-

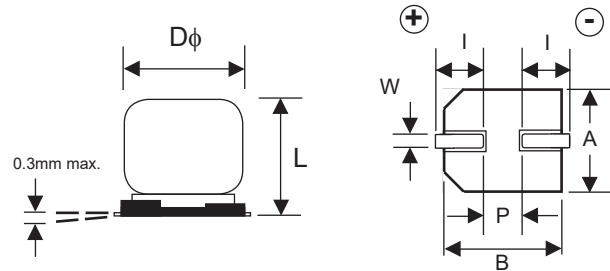

PART NUMBER SYSTEM

NAZU 101 M 16V 6.3x6.3 N B Y F RoHS Compliant

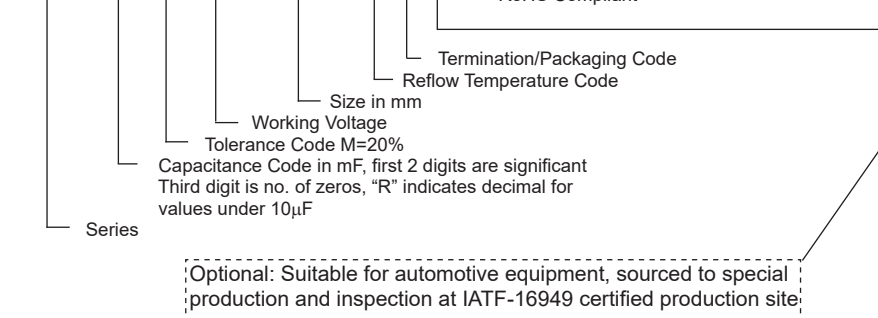

COMPONENT DIMENSIONS (mm)

Case Size	φD±0.5	L max.	A±0.2	B±0.2	I±0.3	W	P±0.3
5x6.3	5.0	6.3	5.3	5.3	2.2	0.5~0.8	1.4
6.3x6.3	6.3	6.3	6.6	6.6	2.5	0.5~0.8	2.2
6.3x8	6.3	8.0	6.6	6.6	2.5	0.5~0.8	2.2

PEAK REFLOW TEMPERATURE CODES

Code	Peak Reflow Temperature
N	260°C

TERMINATION FINISH & PACKAGING OPTIONS CODES

Code	Finish & Reel Size
B	Sn-Bi Finish & 13" Reel
LB	Sn-Bi Finish & 15" Reel
S	100% Sn Finish & 13" Reel
LS	100% Sn Finish & 15" Reel

PRECAUTIONS

Please review the notes on correct use, safety and precautions found at <https://www.niccomp.com/resource/files/aluminum/AlumApplInfoCautions.pdf>
If in doubt or uncertainty, please review your specific application - process details with NIC's technical support personnel: tpmg@niccomp.com



Surface Mount Aluminum Electrolytic Capacitors NAZU Series

STANDARD VALUES, CASE SIZES AND SPECIFICATIONS

NIC Part Number	Cap. (μF)	W.V. (Vdc)	Dissipation Factor (Tan δ)	Max. Impedance (Ω) +20°C, 100KHz	Max. Ripple Current (mA) +105°C, 100KHz	Load Life Hours @ +105°C
NAZU470M6.3V5X6.3N F	47	6.3	0.28	1.30	95	3,000
NAZU101M6.3V6.3X6.3N F	100		0.28	0.70	140	3,000
NAZU221M6.3V6.3X8N F	220		0.28	0.60	230	3,000
NAZU331M6.3V6.3X8N F	330		0.28	0.60	230	3,000
NAZU330M10V5X6.3N F	33	10	0.24	1.30	95	3,000
NAZU470M10V5X6.3N F	47		0.24	1.30	95	3,000
NAZU101M10V6.3X6.3N F	100		0.24	0.70	140	3,000
NAZU151M10V6.3X6.3N F	150		0.24	0.70	140	3,000
NAZU220M16V5X6.3N F	22	16	0.22	1.30	95	3,000
NAZU470M16V6.3X6.3N F	47		0.22	0.70	140	3,000
NAZU101M16V6.3X6.3N F	100		0.22	0.70	140	3,000
NAZU151M16V6.3X8N F	150		0.22	0.60	230	3,000
NAZU221M16V6.3X8N F	220	25	0.22	0.60	230	3,000
NAZU220M25V5X6.3N F	22		0.16	1.30	95	3,000
NAZU330M25V6.3X6.3N F	33		0.16	0.70	140	3,000
NAZU470M25V6.3X6.3N F	47		0.16	0.70	140	3,000
NAZU101M25V6.3X8N F	100	35	0.16	0.60	230	3,000
NAZU100M35V5X6.3N F	10		0.13	1.30	95	3,000
NAZU220M35V6.3X6.3N F	22		0.13	0.70	140	3,000
NAZU470M35V6.3X8N F	47		0.13	0.60	230	3,000
NAZU100M50V6.3X6.3N F	10	50	0.12	2.00	70	3,000
NAZU220M50V6.3X6.3N F	22		0.12	2.00	70	3,000
NAZU330M50V6.3X8N F	33		0.12	1.35	100	3,000

Part Number Suffix Where __: Preferred (15" reel) = LB or LS Legacy (13" reel) = B or S (check with NIC for availability)

For Automotive Equipment, see part number system


RIPPLE CURRENT FREQUENCY CORRECTION FACTORS

Frequency	100Hz	1KHz	10KHz	100KHz
C ≤ 22μF	0.50	0.80	0.90	1.00
22<C≤150μF	0.65	0.85	0.92	1.00
150<C	0.70	0.85	0.95	1.00

PEAK REFLOW TEMPERATURE AND DURATION


Diameter	Time above +200°C	Time above +230°C	Time above +217°C	Peak Temperature 5 seconds
5 ~ 6.3mm φ	80 sec. max.	40 sec. max.	70 sec. max.	260°C

Capacitors can withstand two times reflow at the above conditions. Second reflow shall be at least one hour after natural cool to room temperature.

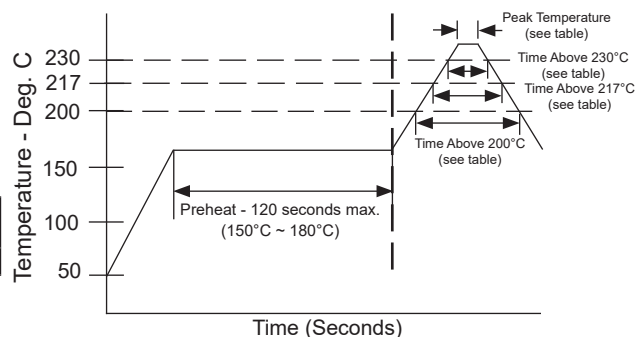

RECOMMENDED LAND PATTERN DIMENSIONS (mm)

Case Size	a	b	c
5x6.3	1.4	3.0	1.8
6x3x6.3 6.3x8	1.8	3.6	1.8



Review & Compare Reflow Soldering Heat Limits
V-chip SMT Aluminum Electrolytic Capacitors
www.niccomp.com/RSL


CARRIER TAPE

Case Size	A ±0.2	B ±0.2	C ±0.3	D ±0.1	P ±0.1	T ±0.2
5 x 6.3	5.7	5.7	12.0	5.5	12.0	6.5
6.3 x 6.3	7.0	7.0	16.0	7.5	12.0	6.5
6.3 x 8	7.0	7.0	16.0	7.5	12.0	8.2

TAPING SPECIFICATIONS (mm)

- Both Leader and Trailer tape: Minimum 40mm (1.57") empty carrier tape pockets.
- Leader tape: Approximately 20cm of cover tape at leader.
- Connection: Maximum 3 connections (slices) per reel.


CARRIER

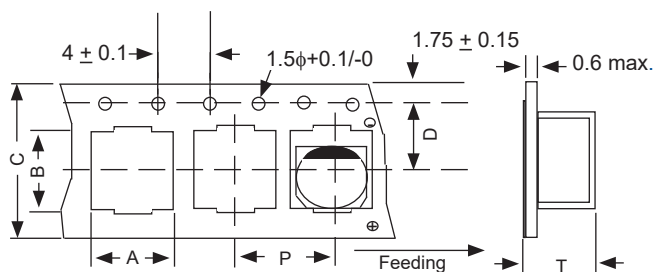

Preferred V-Chip 15" (380mm) Reels (LB suffix)


Dimensions (mm)

Case Size	Tape Width	W1	W2
4x5.5, 4x6.3	12.0	12.5 ~ 14.0	15.5 ~ 20.0
6.3x6.3, 6.3x8	16.0	16.5 ~ 18.0	19.5 ~ 24.0

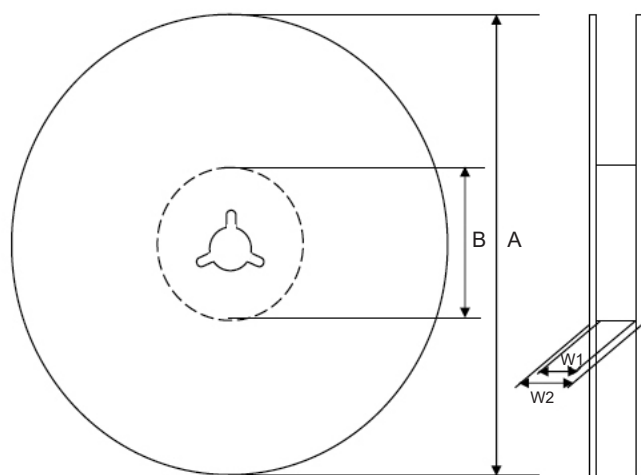


Case Size	Tape Width	A	B	C	D	E
4x5.5, 4x6.3	12.0	φ380	φ80~105	φ13	φ21	2.0
6.3x6.3, 6.3x8	16.0	±2		±0.5	±1.0	±0.5

Color
Black or Blue



Surface Mount Aluminum Electrolytic Capacitors NAZU Series

Optional V-Chip 13" (330mm) Reels (B suffix)

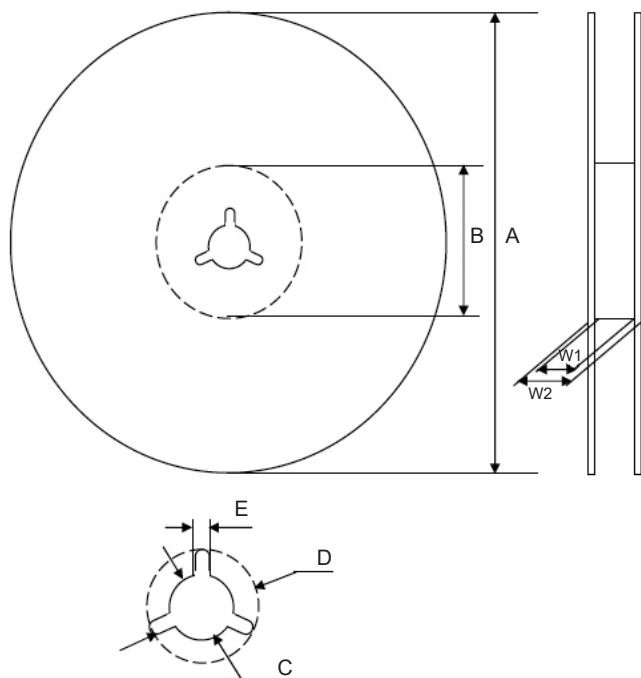

Dimensions (mm)

Case Size	Tape Width	W1	W2
4x5.5, 4x6.3	12.0	12.4 ~ 14.4	15.5 ~ 20.0
6.3x6.3, 6.3x8	16.0	16.4 ~ 18.4	19.5 ~ 24.0

Case Size	Tape Width	A	B	C	D	E
4x5.5, 4x6.3	12.0	$\phi 330$	$\phi 50 \sim 105$	$\phi 13$	$\phi 21$	2.0
6.3x6.3, 6.3x8	16.0	± 2.0		± 0.5	± 1.0	± 0.5

Color
Black or Blue

Case Size	Quantity Per Reel	
	13" Reel	15" Reel
5 x 6.3	1,200 pcs	1,000 pcs
6.3 x 6.3	800 pcs	1,000 pcs
6.3 x 8	500 pcs	900 pcs

