

FPCAP Functional Polymer Aluminum Solid Electrolytic Capacitors

SL & SH series

Low Profile

4.5mmMax
5.0mmMax

ϕ 6.3

Large Capacitance

Lead-free

RoHS Compliance

Features

By using Functional Polymer cathode, Frequency & Temp. characteristics are greatly improved.

- Low ESR at a high frequency range.
- High ripple current capability.
- Low profile type. (Height : 4.5mmMax. & 5mmMax.)

Applications

- Switching Power Supply and DC/DC Converter.
- Back up Power Supplies of CPU(VRM etc.)
- Miniature high Power Supply.

Environmental Correspondence


- Any environmental hazardous substances are not used.
- The lead free of terminal plating (Sn 100%)

Specifications

Items		Characteristic
		SL, SH
Operating temp. range		-55 to +105°C
Rated voltage range		2.5 to 16V-dc
Capacitance range		15 to 390 μ F
Capacitance tolerance		$\pm$ 20% (M)
Endurance	Test condition	105°C, rated voltage 2000Hrs.
	Capacitance	Within $\pm$ 20% of initial value before test
	Leakage current	Not to exceed the initial specified value
	ESR	Not to exceed 150% of initial specified value
	tan δ	Not to exceed 150% of initial specified value
Failure Rate		0.5% / 1000Hrs. Max (60%CL)




Recommended land pattern

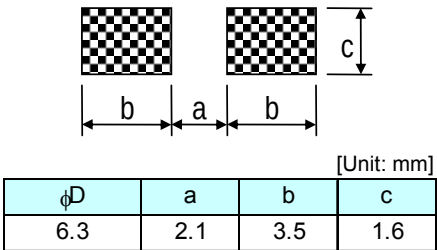

Size (ESR) List

R.V. (S.V.) [M]		2.5 (2.8)		6.3 (7.2)		16 (18.4)	
		SL	SH	SL	SH	SL	SH
Cap. [μ F]							
15						6.3x4.2 (45)	
100		6.3x4.2 (16)		6.3x4.2 (18)			
150				6.3x4.2 (18)			
220		6.3x4.2 (16)		6.3x4.2 (18)			
270					6.3x4.7 (20)		
330		6.3x4.2 (16)					
390			6.3x4.7 (20)				

Dimensions


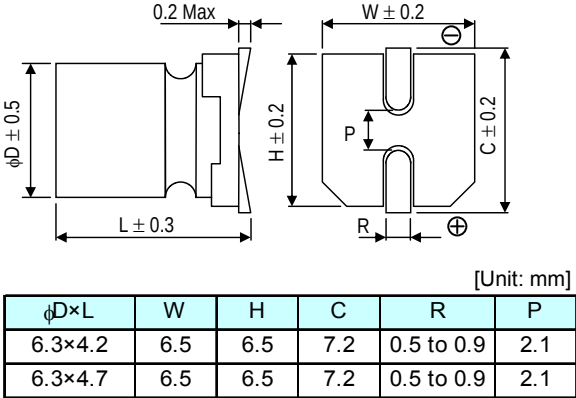


●Part number & Specifications

Rated Voltage (V)	Rated Capacitance (μF, 120Hz)	Part Number		Leakage Current * (μA, 2 min)	tanδ (120Hz)	ESR (mΩ, 100kHz)	Rated Ripple Current (mA, r.m.s.)	Case Size φD×L(mm)
		NICHICON	FPCAP					
2.5	100	RSL0E101MCN1GB	FP-2R5ME101M-SLR	300	0.12	16	3500	6.3 × 4.2
	220	RSL0E221MCN1GB	FP-2R5ME221M-SLR	300	0.12	16	3500	6.3 × 4.2
	330	RSL0E331MCN1GB	FP-2R5ME331M-SLR	413	0.12	16	3500	6.3 × 4.2
	390	RSH0E391MCN1GB	FP-2R5ME391M-SHR	488	0.12	20	3000	6.3 × 4.7
6.3	100	RSL0J101MCN1GB	FP-6R3ME101M-SLR	315	0.12	18	3200	6.3 × 4.2
	150	RSL0J151MCN1GB	FP-6R3ME151M-SLR	473	0.12	18	3200	6.3 × 4.2
	220	RSL0J221MCN1GB	FP-6R3ME221M-SLR	693	0.12	18	3200	6.3 × 4.2
	270	RSH0J271MCN1GB	FP-6R3ME271M-SHR	851	0.12	20	3000	6.3 × 4.7
16	15	RSL1C150MCN1GB	FP-016ME150M-SLR	300	0.12	45	1900	6.3 × 4.2

* In case of some doubt about measured values, measure after applying rated voltage for 120 minutes at 105°C.

●Frequency Characteristics

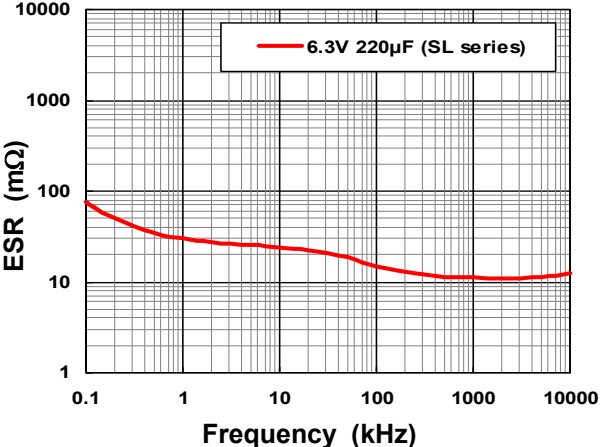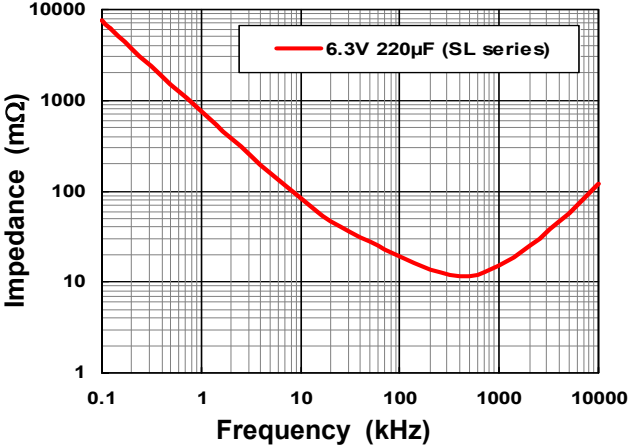

●Part Number (EX) 2.5V, 330μF, SL series
Nichicon P/N

R	SL	0E	331	M	CN	1	GB
Type	Series name	Rated Voltage	Rated Capacitance	Capacitance Tolerance	Configuration	Control code	Taping code

FPCAP P/N

FP	2R5	ME	331	M	SL	R	
Commodity Mark	Rated Voltage	Classification	Rated Capacitance	Capacitance Tolerance	Series name	Taping code	Control code