


GVD Series

- Structure of higher vibration resistance by GPD series (acceleration 392m/s², 40G)
- Guaranteed short time at 150°C
- Designed for electric power steering and ECU (include engine control, direct fuel injection) etc.
- Rated voltage range : 25 to 100V, Capacitance range : 510 to 8,200μF
- Solvent resistant type
- RoHS2 Compliant
- AEC-Q200 compliant : Please contact Chemi-Con for more details, test data, information.




SPECIFICATIONS

| Items | Characteristics | | | | | | |
|---|--|---|---------------------------------------|------|------|------|------|
| Category | | | | | | | |
| Temperature Range | -40 to +135°C | | | | | | |
| Rated Voltage Range | 25 to 100V _{dc} | | | | | | |
| Capacitance Tolerance | ±20% (M) (at 20°C, 120Hz) | | | | | | |
| Leakage Current | I=0.03CV or 4μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C, 1 minute) | | | | | | |
| Dissipation Factor (tan δ) | Rated voltage (V _{dc}) | 25V | 35V | 50V | 63V | 80V | 100V |
| | tan δ (Max.) | 0.14 | 0.12 | 0.10 | 0.10 | 0.08 | 0.08 |
| | When nominal capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase. (at 20°C, 120Hz) | | | | | | |
| Low Temperature Characteristics (Max. Impedance Ratio) | Rated voltage (V _{dc}) | 25V | 35V | 50V | 63V | 80V | 100V |
| | Z(-25°C)/Z(+20°C) | 2 | 2 | 2 | 2 | 2 | 2 |
| | Z(-40°C)/Z(+20°C) | 4 | 4 | 4 | 4 | 4 | 4 |
| Endurance 1 | The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for the specified period of time at 125°C or 135°C. | | | | | | |
| | Time | 125°C | 25 to 100V _{dc} : 3,000hours | | | | |
| | | 135°C | 25 to 50V _{dc} : 3,000hours | | | | |
| | | | 63 to 100V _{dc} : 2,000hours | | | | |
| | Capacitance change | ≤ ±30% of the initial value | | | | | |
| | D.F. (tan δ) | ≤300% of the initial specified value | | | | | |
| | Leakage current | ≤The initial specified value | | | | | |
| Endurance 2 | The following specifications shall be satisfied when the capacitors are restored to 20°C after the test condition that the rated voltage is applied for 100 hours at 150°C and DC voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for the specified period of time at 125°C or 135°C. | | | | | | |
| | Time | 125°C | 25 to 100V _{dc} : 2,500hours | | | | |
| | | 135°C | 25 to 50V _{dc} : 2,500hours | | | | |
| | | | 63 to 100V _{dc} : 1,500hours | | | | |
| | Capacitance change | ≤ ±30% of the initial value | | | | | |
| | D.F. (tan δ) | ≤300% of the initial specified value | | | | | |
| | Leakage current | ≤The initial specified value | | | | | |
| Shelf Life | The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 125°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4. | | | | | | |
| | Capacitance change | ≤ ±30% of the initial value | | | | | |
| | D.F. (tan δ) | ≤300% of the initial specified value | | | | | |
| | Leakage current | ≤The initial specified value | | | | | |
| Vibration | The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to vibration test (vibration profile shown below) at room temperature (15 to 35°C). | | | | | | |
| | Capacitance change | ≤ ±5% of the initial value | | | | | |
| | D.F. (tan δ) | ≤The initial specified value | | | | | |
| | Leakage current | ≤The initial specified value | | | | | |
| | Vibration profile | | | | | | |
| | Vibration frequency range | 10 to 2,000Hz | | | | | |
| | Amplitude or Acceleration | 1.5mm peak to peak or 392m/s ² (40G), whichever is the less severe | | | | | |
| | Sweep rate | 10 to 2,000 to 10Hz 0.5 octave/minute | | | | | |
| | Direction and period of motion | 2 hours in each of 3 mutually perpendicular directions (total of 6hours) | | | | | |
| | Fixation | Fix main body and Lead terminal using a fixture tool, please contact us for detail. | | | | | |

DIMENSIONS [mm]

- Terminal Code : E

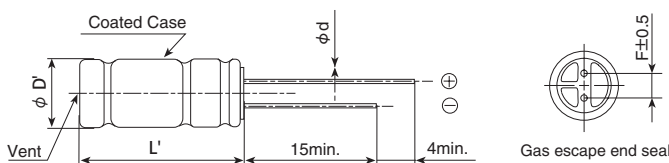


| | |
|-----|----------------|
| φD | 18 |
| φd | 0.8 |
| F | 7.5 |
| φD' | φD±0.5 |
| L' | L'+1.5 -1.0 |

* Please contact us about lead formings and mounting methods.

GVDSeries

◆PART NUMBERING SYSTEM

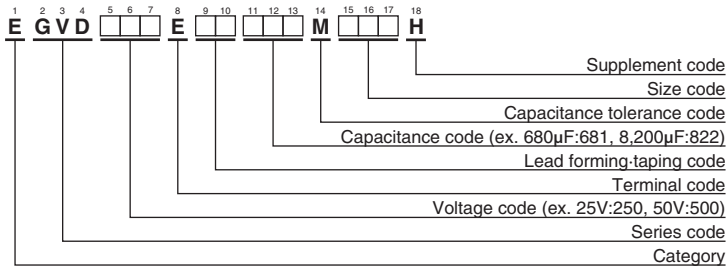

Please refer to "Product code guide (radial lead type)"

◆STANDARD RATINGS

| WV (V _{ac}) | Cap (µF) | Case size φ D × L (mm) | tan δ | ESR (Ω max/100kHz) | | Rated ripple current (mA rms/100kHz) | | Part No. |
|--------------------------|-------------|---------------------------|-------|-----------------------|-------|---|-------|--------------------|
| | | | | 20°C | -40°C | 125°C | 135°C | |
| 25 | 6,200 | 18 × 30 | 0.24 | 0.023 | 0.19 | 5,380 | 3,330 | EGVD250E□□622MM30H |
| | 8,200 | 18 × 35.5 | 0.28 | 0.019 | 0.13 | 6,110 | 3,750 | EGVD250E□□822MMP1H |
| 35 | 3,600 | 18 × 30 | 0.16 | 0.023 | 0.19 | 5,380 | 3,330 | EGVD350E□□362MM30H |
| | 4,700 | 18 × 35.5 | 0.18 | 0.019 | 0.13 | 6,110 | 3,750 | EGVD350E□□472MMP1H |
| 50 | 2,000 | 18 × 30 | 0.12 | 0.029 | 0.26 | 5,050 | 2,910 | EGVD500E□□202MM30H |
| | 2,400 | 18 × 35.5 | 0.12 | 0.024 | 0.20 | 5,760 | 3,330 | EGVD500E□□242MMP1H |
| 63 | 1,300 | 18 × 30 | 0.10 | 0.029 | 0.18 | 3,930 | 3,100 | EGVD630E□□132MM30H |
| | 1,800 | 18 × 35.5 | 0.10 | 0.024 | 0.14 | 4,920 | 3,520 | EGVD630E□□182MMP1H |
| 80 | 820 | 18 × 30 | 0.08 | 0.029 | 0.18 | 3,930 | 3,100 | EGVD800E□□821MM30H |
| | 1,200 | 18 × 35.5 | 0.08 | 0.024 | 0.14 | 4,920 | 3,520 | EGVD800E□□122MMP1H |
| 100 | 510 | 18 × 30 | 0.08 | 0.038 | 0.25 | 3,800 | 2,830 | EGVD101E□□511MM30H |
| | 680 | 18 × 35.5 | 0.08 | 0.030 | 0.19 | 4,550 | 3,210 | EGVD101E□□681MMP1H |

□□ : Enter the appropriate lead forming or taping code.

◆RATED RIPPLE CURRENT MULTIPLIERS

● Frequency Multipliers

| Capacitance(µF) | Frequency(Hz) | | | |
|-----------------|---------------|------|------|------|
| | 120 | 1k | 10k | 100k |
| 510 | 0.50 | 0.85 | 0.94 | 1.00 |
| 680 to 2,000 | 0.60 | 0.87 | 0.95 | 1.00 |
| 2,400 to 3,600 | 0.75 | 0.90 | 0.95 | 1.00 |
| 4,700 to 8,200 | 0.85 | 0.95 | 0.98 | 1.00 |

Please contact us for lifetime estimation.