

Alchip™-MLA Series

- Low impedance, long life
- Rated voltage 6.3 to 50V, Capacitance 10 to 1,000μF
- Case size $\phi 5 \times 5.8L$ to $\phi 10 \times 10L$
- Suitable for applications requiring long life and low impedance such as equipment in continuous operation, industrial applications, etc.
- Solvent resistant type (see PRECAUTIONS AND GUIDELINES)
- RoHS2 Compliant

MVY → Longer life → **MLA**




SPECIFICATIONS

Items	Characteristics						
Category	-40 to +105°C						
Temperature Range							
Rated Voltage Range	6.3 to 50V _{dc}						
Capacitance Tolerance	±20%(M) (at 20°C, 120Hz)						
Leakage Current	I=0.01CV or 3μA, whichever is greater Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)						
Dissipation Factor (tan δ)	Rated voltage(V _{dc})	6.3V	10V	16V	25V	35V	50V
	E61 to F61	0.28	0.24	0.22	0.16	0.13	0.12
	F80	0.32	0.27	0.24	0.16	0.13	0.12
Low Temperature Characteristics (Max. impedance Ratio)	tan δ (Max.)	HA0 to JA0	0.28	0.24	0.22	0.16	0.13
	Rated voltage(V _{dc})	6.3V	10V	16V	25V	35V	50V
	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2
Endurance	Z(-40°C)/Z(+20°C)	10	7	5	3	3	3
	(at 120Hz)						
	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 3,000 hours at 105°C.						
Shelf life	Capacitance change	≤ ±30% of the initial value					
	D.F. (tan δ)	≤300% of the initial specified value					
	Leakage current	≤The initial specified value					

DIMENSIONS [mm]

Terminal Code : A

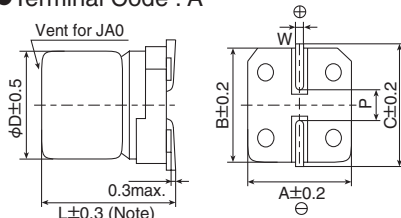

Note : L±0.5 for HA0 and JA0


Size code	D	L	A	B	C	W	P
E61	5	5.8	5.3	5.3	5.9	0.5 to 0.8	1.4
F61	6.3	5.8	6.6	6.6	7.2	0.5 to 0.8	1.9
F80	6.3	7.7	6.6	6.6	7.2	0.5 to 0.8	1.9
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

MARKING

EX) 16V100μF



PART NUMBERING SYSTEM

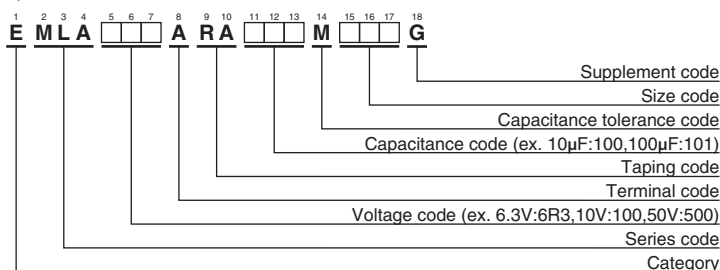

Please refer to "Product code guide (surface mount type)"

Rated voltage symbol

Rated voltage (V _{dc})	Symbol
6.3	j
10	A
16	C
25	E
35	V
50	H

◆STANDARD RATINGS

WV (V _{ac})	Cap (μF)	Size code	tan δ	Impedance (Ω max./20°C, 100kHz)	Rated ripple current (mA _{rms} /105°C, 100kHz)	Part No.	WV (V _{dc})	Cap (μF)	Size code	tan δ	Impedance (Ω max./20°C, 100kHz)	Rated ripple current (mA _{rms} /105°C, 100kHz)	Part No.
6.3	47	E61	0.28	1.30	95	EMLA6R3ARA470ME61G	25	33	F61	0.16	0.70	140	EMLA250ARA330MF61G
	100	F61	0.28	0.70	140	EMLA6R3ARA101MF61G		47	F61	0.16	0.70	140	EMLA250ARA470MF61G
	150	F61	0.28	0.70	140	EMLA6R3ARA151MF61G		47	F80	0.16	0.70	230	EMLA250ARA470MF80G
	220	F80	0.32	0.70	230	EMLA6R3ARA221MF80G		100	F80	0.16	0.70	230	EMLA250ARA101MF80G
	330	F80	0.32	0.70	230	EMLA6R3ARA331MF80G		100	HA0	0.16	0.16	600	EMLA250ARA101MHA0G
	330	HA0	0.28	0.16	600	EMLA6R3ARA331MHA0G		150	HA0	0.16	0.16	600	EMLA250ARA151MHA0G
	470	HA0	0.28	0.16	600	EMLA6R3ARA471MHA0G		220	HA0	0.16	0.16	600	EMLA250ARA221MHA0G
10	1,000	JA0	0.28	0.08	850	EMLA6R3ARA102MJA0G	35	330	HA0	0.16	0.16	600	EMLA250ARA331MHA0G
	33	E61	0.24	1.30	95	EMLA100ARA330ME61G		330	JA0	0.16	0.08	850	EMLA250ARA331MJA0G
	47	F61	0.24	0.70	140	EMLA100ARA470MF61G		470	JA0	0.16	0.08	850	EMLA250ARA471MJA0G
	100	F61	0.24	0.70	140	EMLA100ARA101MF61G		10	E61	0.13	1.30	95	EMLA350ARA100ME61G
	150	F61	0.24	0.70	140	EMLA100ARA151MF61G		22	F61	0.13	0.70	140	EMLA350ARA220MF61G
	220	F80	0.27	0.70	230	EMLA100ARA221MF80G		33	F61	0.13	0.70	140	EMLA350ARA330MF61G
	220	HA0	0.24	0.16	600	EMLA100ARA221MHA0G	50	33	F80	0.13	0.70	230	EMLA350ARA330MF80G
16	330	HA0	0.24	0.16	600	EMLA100ARA331MHA0G		47	F80	0.13	0.70	230	EMLA350ARA470MF80G
	470	HA0	0.24	0.16	600	EMLA100ARA471MHA0G		100	F80	0.13	0.70	230	EMLA350ARA101MF80G
	22	E61	0.22	1.30	95	EMLA160ARA220ME61G		100	HA0	0.13	0.16	600	EMLA350ARA101MHA0G
	33	F61	0.22	0.70	140	EMLA160ARA330MF61G		150	HA0	0.13	0.16	600	EMLA350ARA151MHA0G
	47	F61	0.22	0.70	140	EMLA160ARA470MF61G		220	HA0	0.13	0.16	600	EMLA350ARA221MHA0G
	100	F61	0.22	0.70	140	EMLA160ARA101MF61G		220	JA0	0.13	0.08	850	EMLA350ARA221MJA0G
	100	F80	0.24	0.70	230	EMLA160ARA101MF80G		330	JA0	0.13	0.08	850	EMLA350ARA331MJA0G
25	150	F80	0.24	0.70	230	EMLA160ARA151MF80G	50	10	F61	0.12	2.00	70	EMLA500ARA100MF61G
	220	F80	0.24	0.70	230	EMLA160ARA221MF80G		22	F61	0.12	2.00	70	EMLA500ARA220MF61G
	220	HA0	0.22	0.16	600	EMLA160ARA221MHA0G		33	F80	0.12	1.60	100	EMLA500ARA330MF80G
	330	HA0	0.22	0.16	600	EMLA160ARA331MHA0G		47	F80	0.12	1.60	100	EMLA500ARA470MF80G
	470	HA0	0.22	0.16	600	EMLA160ARA471MHA0G		47	HA0	0.12	0.34	350	EMLA500ARA470MHA0G
	470	JA0	0.22	0.08	850	EMLA160ARA471MJA0G		100	HA0	0.12	0.34	350	EMLA500ARA101MHA0G
	10	E61	0.16	1.30	95	EMLA250ARA100ME61G		100	JA0	0.12	0.18	670	EMLA500ARA101MJA0G
25	22	E61	0.16	1.30	95	EMLA250ARA220ME61G		150	JA0	0.12	0.18	670	EMLA500ARA151MJA0G
	22	F61	0.16	0.70	140	EMLA250ARA220MF61G		220	JA0	0.12	0.18	670	EMLA500ARA221MJA0G

◆RATED RIPPLE CURRENT MULTIPLIERS

● Frequency Multipliers

Capacitance(μF)	Frequency(Hz)	120	1k	10k	100k
10 to 150		0.40	0.75	0.90	1.00
220 to 470		0.50	0.85	0.94	1.00
1,000		0.60	0.87	0.95	1.00

The deterioration of aluminum electrolytic capacitors accelerates their life due to the internal heating produced by ripple current. For details, refer to Section "5-3 Ripple Current Effect on Lifetime" in the catalog, Technical Note.