

# SFH 7015

## CHIPLED®

Red (655 nm) and Infrared Emitter (940 nm)



## Applications

- Health Monitoring (Heart Rate Monitoring, Pulse Oximetry)

## Features:

- Package: clear epoxy
- ESD: 2 kV acc. to ANSI/ESDA/JEDEC JS-001 (HBM, Class 2)
- SMT package
- Suitable for SMT assembly
- Available on tape and reel
- Emitters can be controlled separately

## Ordering Information

Type	Brightness <sup>1)2)</sup>	Ordering Code
SFH 7015		Q65112A7658
• hyper red	• $I_e = 2.20 \dots 6.75 \text{ mW/sr}$ ( $I_F = 20 \text{ mA}$ )	
• infrared (940 nm)	• $I_e = 1.65 \dots 4.05 \text{ mW/sr}$ ( $I_F = 20 \text{ mA}$ )	

## Maximum Ratings

$T_A = 25\text{ °C}$

Parameter	Symbol		Values	
			● hyper red	● infrared (940 nm)
Operating temperature	$T_{op}$	min.	-40 °C	-40 °C
		max.	85 °C	85 °C
Storage temperature	$T_{stg}$	min.	-40 °C	-40 °C
		max.	85 °C	85 °C
Forward current	$I_F$	min.	3 mA	1 mA
		max.	40 mA	60 mA
Surge current $t_p \leq 400\ \mu\text{s}$ ; $D = 0.005$	$I_{FSM}$	max.	0.6 A	1 A
Reverse voltage <sup>3)</sup>	$V_R$	max.	5 V	5 V
Power consumption	$P_{tot}$	max.	120 mW	110 mW
ESD withstand voltage acc. to ANSI/ESDA/JEDEC JS-001 (HBM, Class 2)	$V_{ESD}$	max.	2 kV	2 kV

The stated maximum ratings refer to one chip, unless otherwise specified.


## Characteristics

$I_F = 20 \text{ mA}$ ;  $t_p = 20 \text{ ms}$ ;  $T_A = 25 \text{ °C}$

Parameter	Symbol		Values	
			● hyper red	● infrared (940 nm)
Peak wavelength	$\lambda_{\text{peak}}$	typ.	660 nm	950 nm
Centroid wavelength <sup>4)</sup>	$\lambda_{\text{centroid}}$	min.	653 nm	931 nm
		typ.	655 nm	940 nm
		max.	658 nm	950 nm
Spectral bandwidth at 50% $I_{\text{rel,max}}$ (FWHM)	$\Delta\lambda$	typ.	17 nm	42 nm
Half angle	$\varphi$	typ.	60 °	60 °
Dimensions of active chip area	L x W	typ.	0.3 x 0.3 mm x mm	0.3 x 0.3 mm x mm
Rise time (10% / 90%) $I_F = 100 \text{ mA}$ ; $R_L = 50 \text{ } \Omega$	$t_r$	typ.	17 ns	16 ns
Fall time (10% / 90%) $I_F = 100 \text{ mA}$ ; $R_L = 50 \text{ } \Omega$	$t_f$	typ.	17 ns	16 ns
Forward voltage <sup>5)</sup>	$V_F$	min.	1.75 V	1.10 V
		typ.	2.10 V	1.30 V
		max.	2.40 V	1.50 V
Reverse current <sup>3)</sup> $V_R = 5 \text{ V}$	$I_R$	max.	10 $\mu\text{A}$	10 $\mu\text{A}$
Radiant intensity <sup>1)2)</sup> $I_F = 20 \text{ mA}$ ; $t_p = 20 \text{ ms}$	$I_e$	min.	2.2 mW/sr	1.65 mW/sr
		typ.	4 mW/sr	3 mW/sr
		max.	6.75 mW/sr	4.05 mW/sr
Total radiant flux <sup>6)</sup>	$\Phi_e$	typ.	13 mW	10 mW
Temperature coefficient of voltage	$TC_V$	typ.	-1.7 mV / K	-0.8 mV / K
Temperature coefficient of brightness	$TC_I$	typ.	-0.7 % / K	-0.3 % / K
Temperature coefficient of wavelength	$TC_\lambda$	typ.	0.18 nm / K	0.3 nm / K
Thermal resistance junction ambient real	$R_{\text{thJA}}$	max.	590 K / W	670 K / W


**Relative Spectral Emission** 7), 8)

- infrared (940 nm):  $I_{e,rel} = f(\lambda)$ ;  $I_F = 20 \text{ mA}$ ;  $t_p = 20 \text{ ms}$

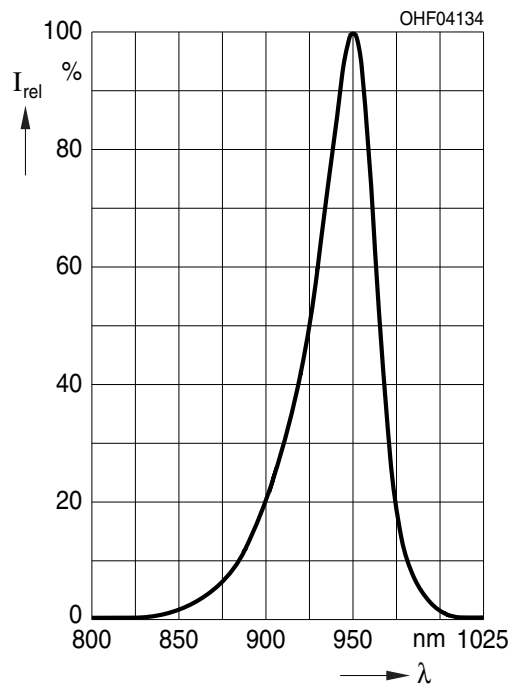


**Relative Spectral Emission** 7), 8)

- hyper red:  $I_{e,rel} = f(\lambda)$ ;  $I_F = 20 \text{ mA}$ ;  $t_p = 20 \text{ ms}$

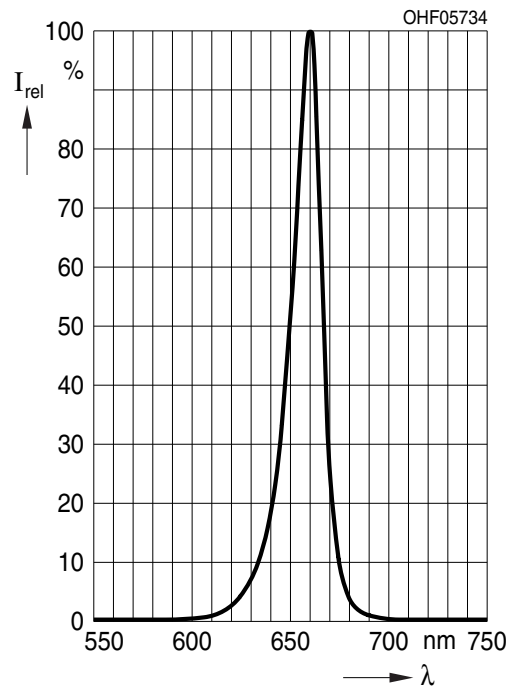

**Radiation Characteristics** 7), 8)

$I_{rel} = f(\phi); T_A = 25\text{ }^\circ\text{C}$


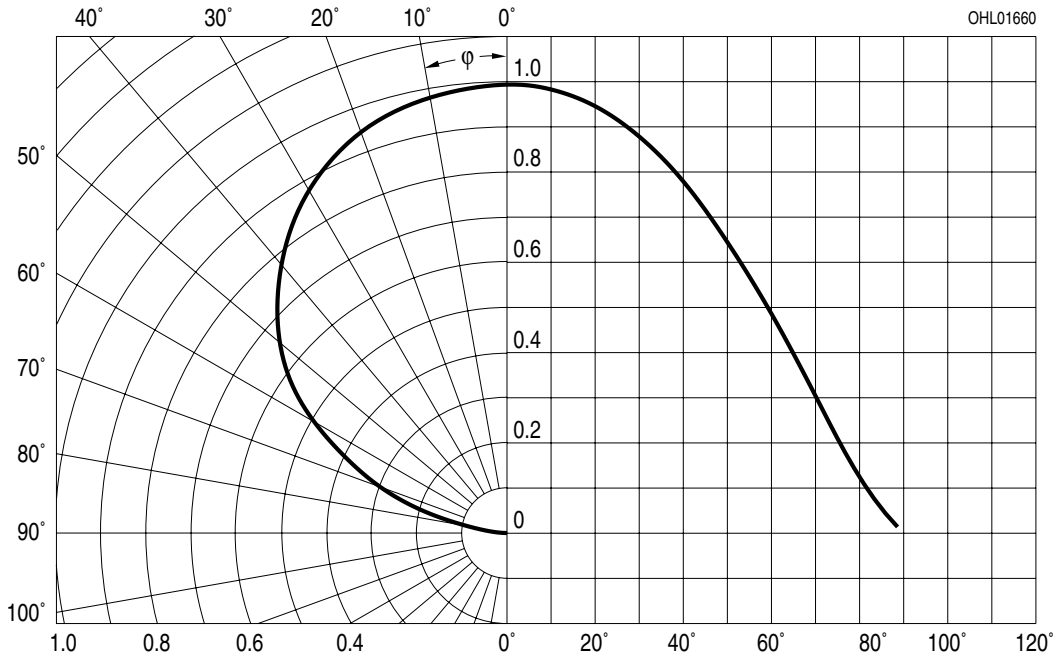


**Forward current** 7), 8)

• infrared (940 nm):  $I_F = f(V_F)$ ; single pulse;  $t_p = 100\text{ }\mu\text{s}$


**Forward current** 7), 8)

• hyper red:  $I_F = f(V_F)$ ; single pulse;  $t_p = 100\text{ }\mu\text{s}$

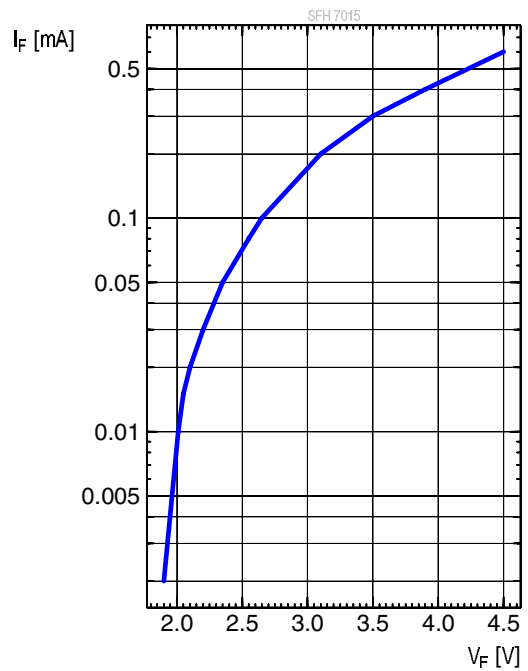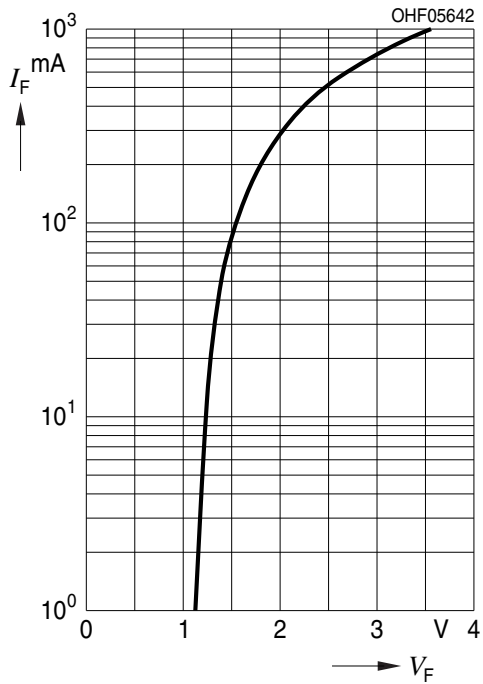


**Relative Radiant Intensity** 7), 8)

- infrared (940 nm):  $I_e/I_e(20\text{mA}) = f(I_F)t_p = 100 \mu\text{s}$

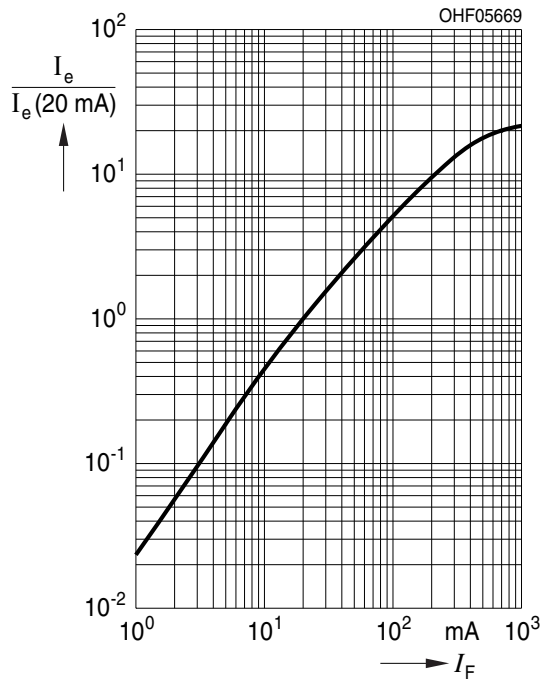


**Relative Radiant Intensity** 7), 8)

- hyper red:  $I_e/I_e(20\text{mA}) = f(I_F)t_p = 25 \mu\text{s}$

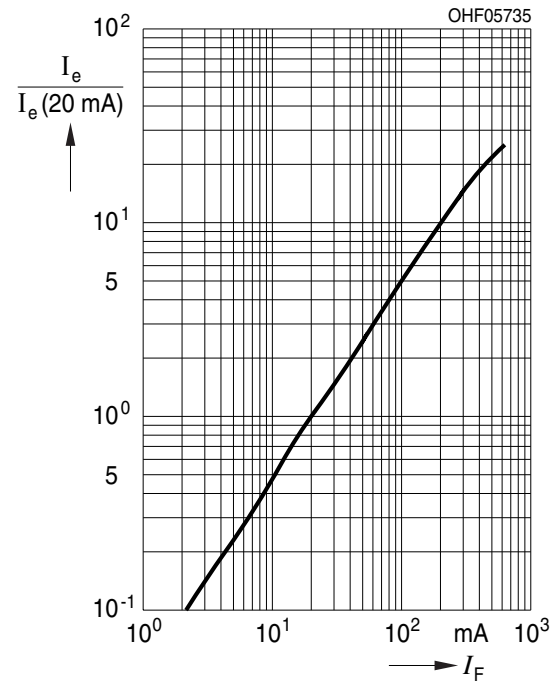


**Max. Permissible Forward Current**

- hyper red:  $I_{F,max} = f(T_A); R_{th_{ja}} = 590\text{K} / \text{W}$

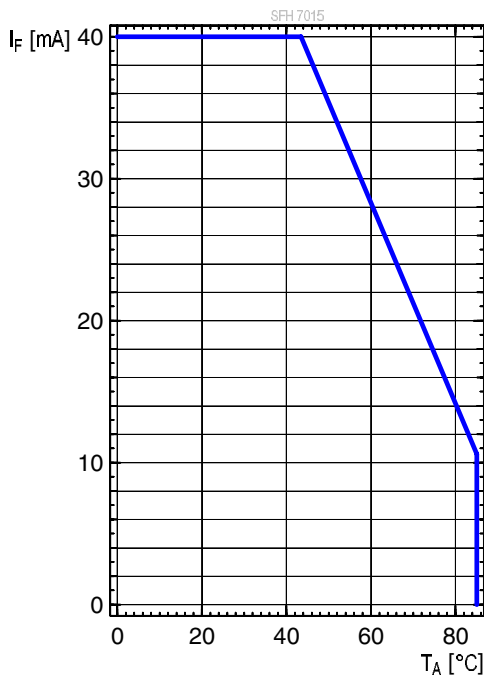


**Max. Permissible Forward Current**

- infrared (940 nm):  $I_{F,max} = f(T_A); R_{th_{ja}} = 670\text{K} / \text{W}$

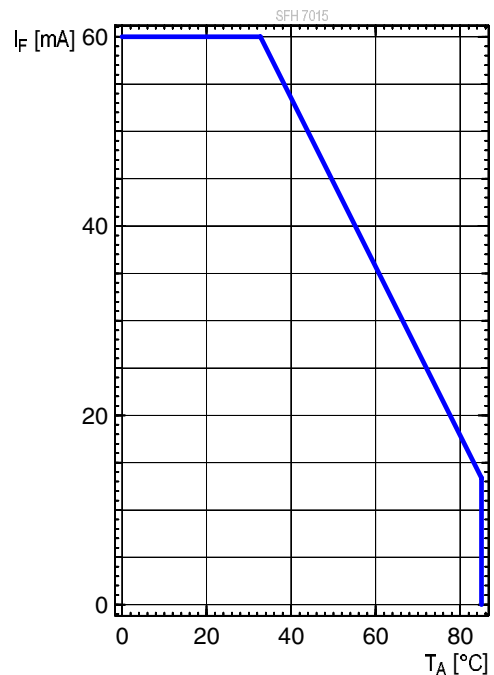


**Permissible Pulse Handling Capability**

- hyper red:  $I_F = f(t_p)$ ;  $D =$  parameter;  $T_A = 25^\circ\text{C}$

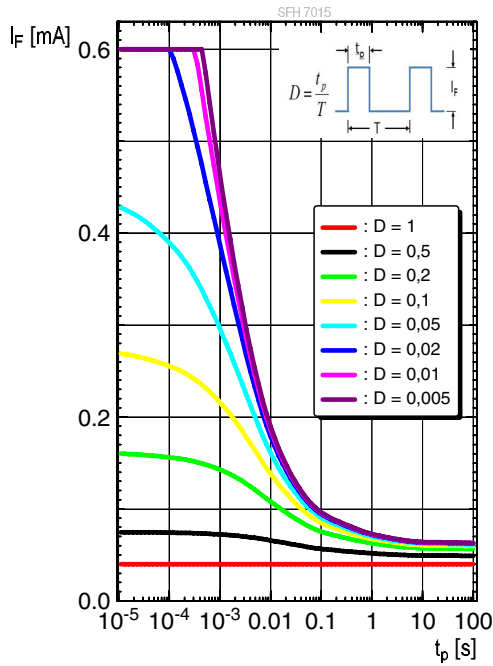


**Permissible Pulse Handling Capability**

- infrared (940 nm):  $I_F = f(t_p)$ ;  $D =$  parameter;  $T_A = 25^\circ\text{C}$

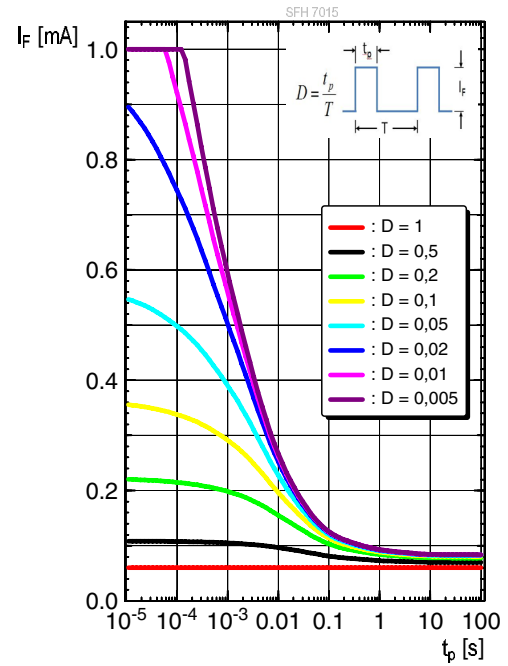


**Permissible Pulse Handling Capability**

- hyper red:  $I_F = f(t_p)$ ;  $D =$  parameter;  $T_A = 85^\circ\text{C}$

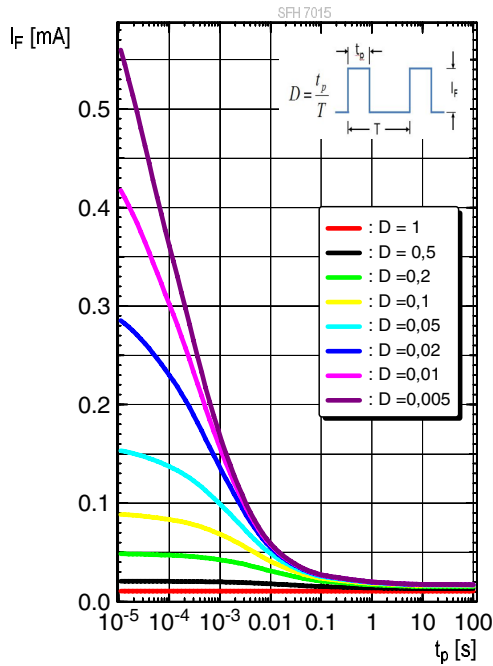


**Permissible Pulse Handling Capability**

- infrared (940 nm):  $I_F = f(t_p)$ ;  $D =$  parameter;  $T_A = 85^\circ\text{C}$

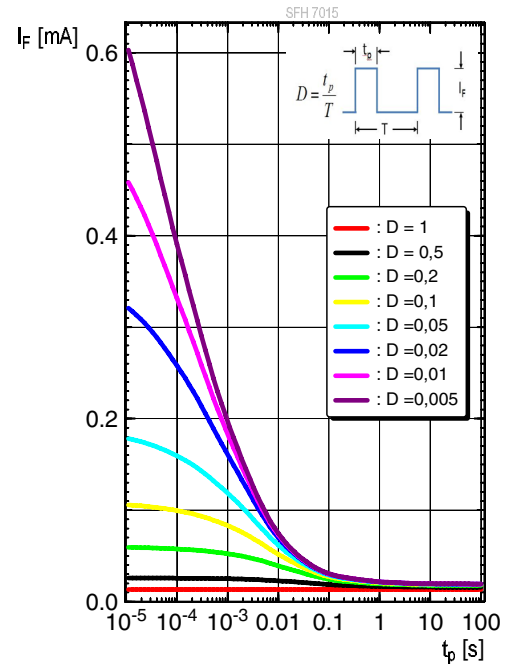

Dimensional Drawing <sup>9)</sup>

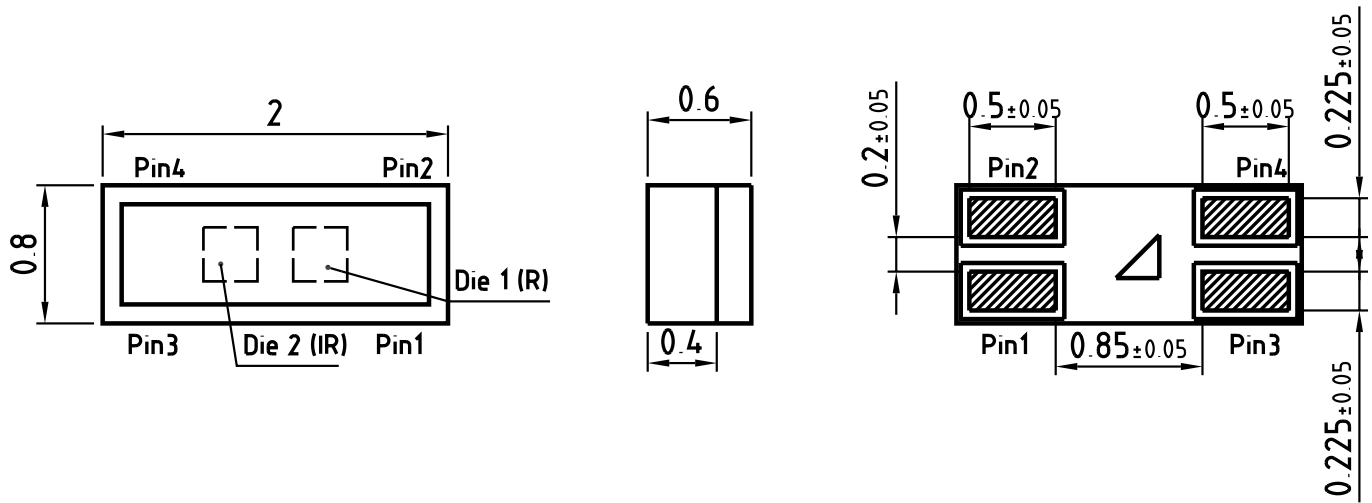

general tolerance  $\pm 0.1$   
 lead finish Au

C67062-A0309-A1-01




Further Information:

Approximate Weight: 1.7 mg


Pin	Description
1	NC
2	Cathode red emitter (655 nm)
3	Anode red/ infrared emitter
4	Cathode infrared emitter (940 nm)




## Recommended Solder Pad <sup>9)</sup>

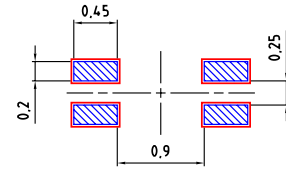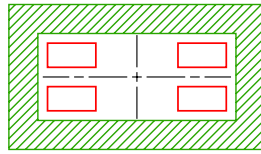
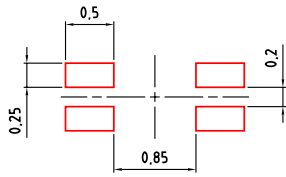


 foot print

 solder resist

 solder stencil


### Component Location on Pad

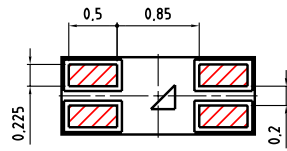

E062.3010.260 -02

## Reflow Soldering Profile

Product complies to MSL Level 3 acc. to JEDEC J-STD-020E

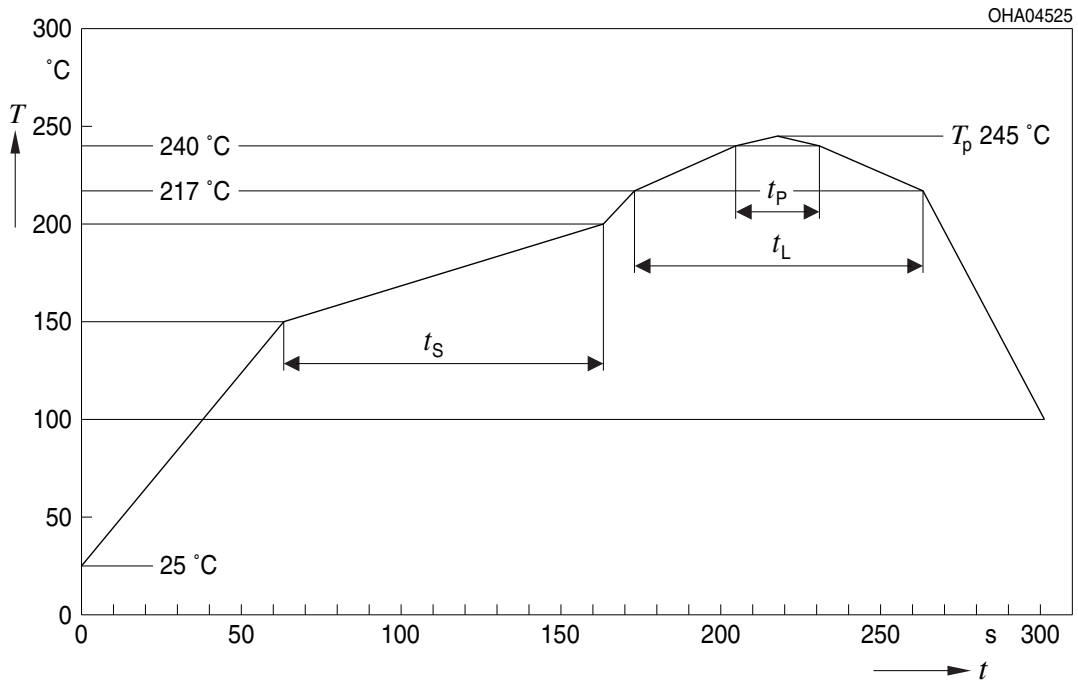


Profile Feature	Symbol	Pb-Free (SnAgCu) Assembly			Unit
		Minimum	Recommendation	Maximum	
Ramp-up rate to preheat <sup>*)</sup> 25 °C to 150 °C			2	3	K/s
Time $t_s$ $T_{Smin}$ to $T_{Smax}$	$t_s$	60	100	120	s
Ramp-up rate to peak <sup>*)</sup> $T_{Smax}$ to $T_p$			2	3	K/s
Liquidus temperature	$T_L$		217		°C
Time above liquidus temperature	$t_L$		80	100	s
Peak temperature	$T_p$		245	260	°C
Time within 5 °C of the specified peak temperature $T_p - 5$ K	$t_p$	10	20	30	s
Ramp-down rate* $T_p$ to 100 °C			3	6	K/s
Time 25 °C to $T_p$				480	s

All temperatures refer to the center of the package, measured on the top of the component


\* slope calculation  $DT/Dt$ :  $Dt$  max. 5 s; fulfillment for the whole T-range

**Taping** <sup>9)</sup>

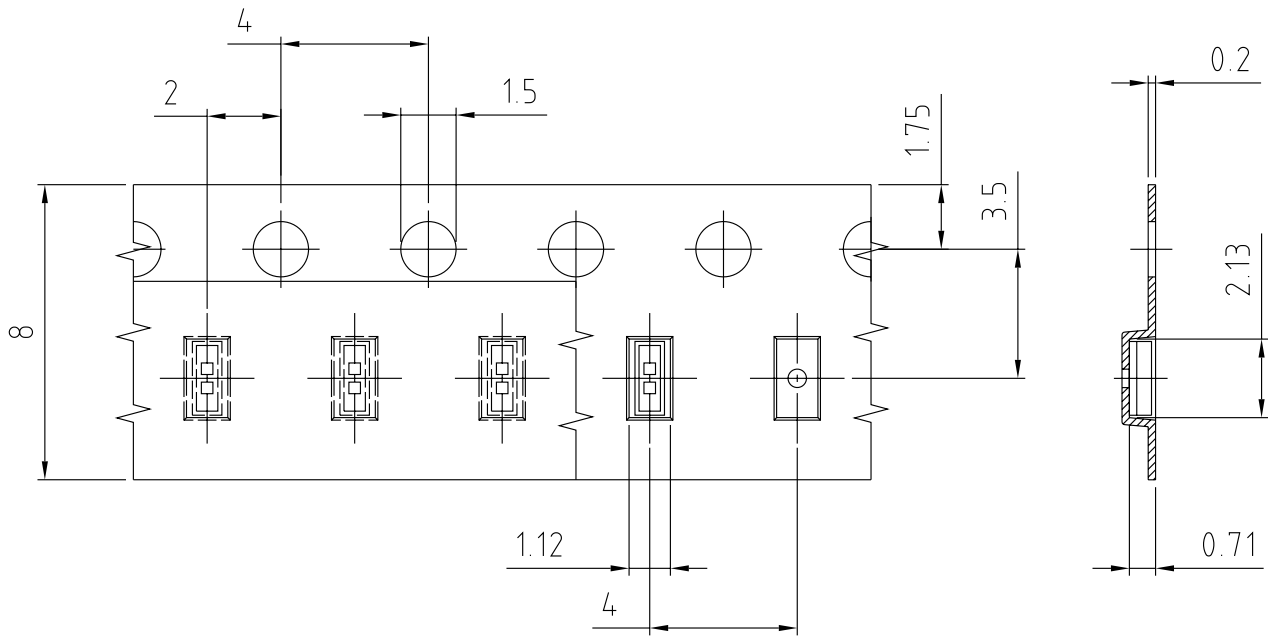

C67062-A0309-B1-01

**Tape and Reel** <sup>10)</sup>

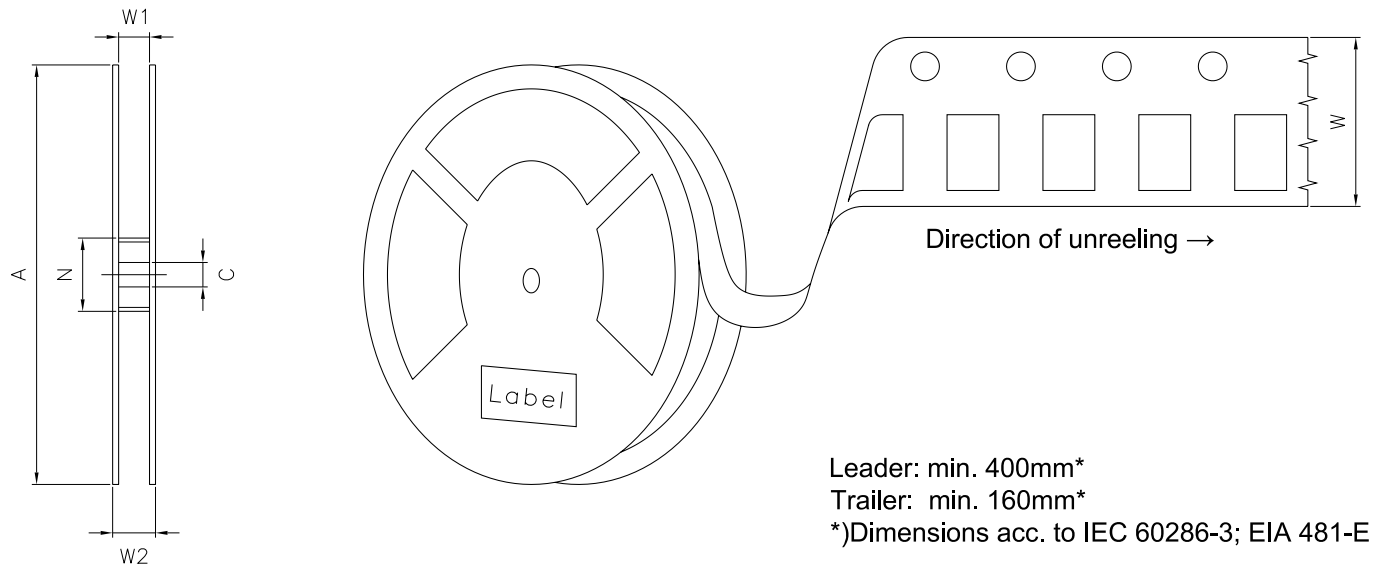

**Reel Dimensions**

A	W	$N_{\min}$	$W_1$	$W_{2\max}$	Pieces per PU
180 mm	$8 + 0.3 / - 0.1$ mm	60 mm	$8.4 + 2$ mm	14.4 mm	3000

### Barcode-Product-Label (BPL)

**OSRAM Opto Semiconductors** LX XXXX BIN1: XX-XX-X-XXX-X

RoHS Compliant

(6P) BATCH NO: 1234567890 ML Temp ST  
X XXX °C X


(1T) LOT NO: 1234567890 (9D) D/C: 1234 Pack: RXX  
DEMY XXX  
X\_X123\_1234.1234 X

(X) PROD NO: 123456789(Q)QTY: 9999 (G) GROUP: XX-XX-X-X

The diagram shows a rectangular label with rounded corners. It contains the OSRAM logo and product name at the top left. To the right are fields for 'LX XXXX' and 'BIN1: XX-XX-X-XXX-X'. Below the logo is a 'RoHS Compliant' statement. The label features three horizontal barcode areas. The first is labeled '(6P) BATCH NO: 1234567890' and is accompanied by a 'No liquid' symbol and 'ML Temp ST X XXX °C X'. The second is labeled '(1T) LOT NO: 1234567890' and '(9D) D/C: 1234' and is accompanied by 'Pack: RXX', 'DEMY XXX', and 'X\_X123\_1234.1234 X'. The third is labeled '(X) PROD NO: 123456789(Q)QTY: 9999' and '(G) GROUP: XX-XX-X-X'. A QR code is located on the right side of the label.

OHA04563

### Dry Packing Process and Materials <sup>9)</sup>

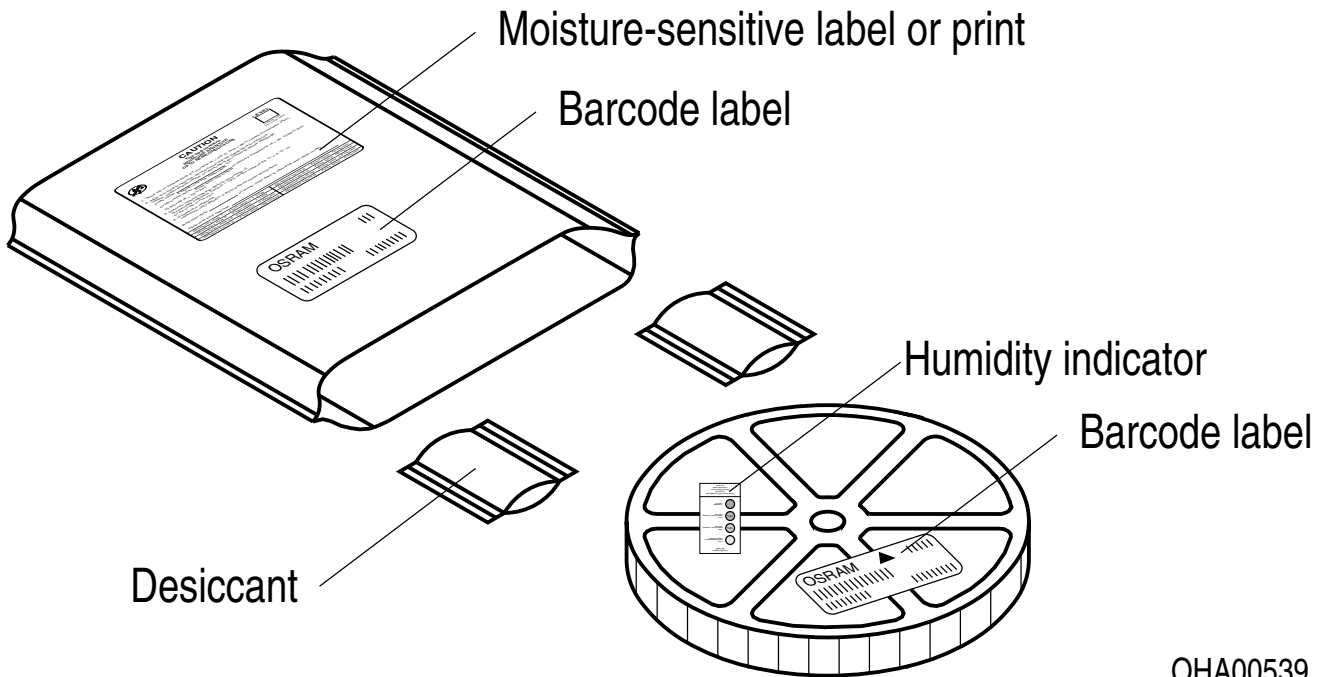

OHA00539

Moisture-sensitive product is packed in a dry bag containing desiccant and a humidity card according JEDEC-STD-033.

## Notes

The evaluation of eye safety occurs according to the standard IEC 62471:2006 (photo biological safety of lamps and lamp systems). Within the risk grouping system of this IEC standard, the device specified in this data sheet fall into the class **exempt group (exposure time 10000 s)**. Under real circumstances (for exposure time, conditions of the eye pupils, observation distance), it is assumed that no endangerment to the eye exists from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect. When looking at bright light sources (e.g. headlights), temporary reduction in visual acuity and afterimages can occur, leading to irritation, annoyance, visual impairment, and even accidents, depending on the situation.

Subcomponents of this device contain, in addition to other substances, metal filled materials including silver. Metal filled materials can be affected by environments that contain traces of aggressive substances. Therefore, we recommend that customers minimize device exposure to aggressive substances during storage, production, and use. Devices that showed visible discoloration when tested using the described tests above did show no performance deviations within failure limits during the stated test duration. Respective failure limits are described in the IEC60810.

For further application related information please visit [www.osram-os.com/appnotes](http://www.osram-os.com/appnotes)

## Disclaimer

### **Attention please!**

The information describes the type of component and shall not be considered as assured characteristics. Terms of delivery and rights to change design reserved. Due to technical requirements components may contain dangerous substances.

For information on the types in question please contact our Sales Organization.

If printed or downloaded, please find the latest version on the OSRAM OS website.

### **Packing**

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office. By agreement we will take packing material back, if it is sorted. You must bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

### **Product and functional safety devices/applications or medical devices/applications**

OSRAM OS components are not developed, constructed or tested for the application as safety relevant component or for the application in medical devices.

OSRAM OS products are not qualified at module and system level for such application.

In case buyer – or customer supplied by buyer – considers using OSRAM OS components in product safety devices/applications or medical devices/applications, buyer and/or customer has to inform the local sales partner of OSRAM OS immediately and OSRAM OS and buyer and /or customer will analyze and coordinate the customer-specific request between OSRAM OS and buyer and/or customer.

---

## Glossary

- 1) **Radiant intensity:** Measured at a solid angle of  $\Omega = 0.01$  sr
- 2) **Brightness:** The brightness values are measured with a tolerance of  $\pm 11\%$ .
- 3) **Reverse Operation:** This product is intended to be operated applying a forward current within the specified range. Applying any continuous reverse bias or forward bias below the voltage range of light emission shall be avoided because it may cause migration which can change the electro-optical characteristics or damage the LED.
- 4) **Wavelength:** The wavelengths are measured with a tolerance of  $\pm 1$  nm.
- 5) **Forward Voltage:** The forward voltages are measured with a tolerance of  $\pm 0.1$  V.
- 6) **Total radiant flux:** Measured with integrating sphere.
- 7) **Typical Values:** Due to the special conditions of the manufacturing processes of semiconductor devices, the typical data or calculated correlations of technical parameters can only reflect statistical figures. These do not necessarily correspond to the actual parameters of each single product, which could differ from the typical data and calculated correlations or the typical characteristic line. If requested, e.g. because of technical improvements, these typ. data will be changed without any further notice.
- 8) **Testing temperature:**  $T_A = 25^\circ\text{C}$  (unless otherwise specified)
- 9) **Tolerance of Measure:** Unless otherwise noted in drawing, tolerances are specified with  $\pm 0.1$  and dimensions are specified in mm.
- 10) **Tape and Reel:** All dimensions and tolerances are specified acc. IEC 60286-3 and specified in mm.



---

## Revision History

Version	Date	Change
1.0	2019-09-30	Initial Version
1.1	2020-08-04	New Layout Schematic Transportation Box Dimensions of Transportation Box
1.2	2021-02-05	Characteristics Taping

Published by OSRAM Opto Semiconductors GmbH EU RoHS and China RoHS compliant product  
Leibnizstraße 4, D-93055 Regensburg  
www.osram-os.com © All Rights Reserved.



此产品符合欧盟 RoHS 指令的要求；  
按照中国的相关法规和标准，不含有毒有害物质或元素。