
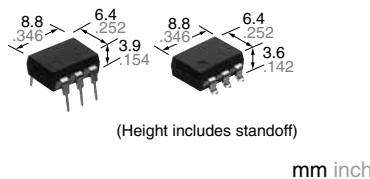


**DIP6-pin type  
featuring high sensitivity**

PhotoMOS®

**HS 1 Form A  
(AQV234)**



### FEATURES

**1. High sensitivity**

LED operate current: Typ. 0.31mA  
Recommended LED input current: 2mA

**2. Low-level off state leakage current of max. 1 µA**

**3. Controls low-level analog signals**  
PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

### TYPICAL APPLICATIONS

**1. High-speed inspection machines**  
Scanner, IC checker, Board tester, etc.

**2. Telephone and data communication equipment**

**3. Battery operating equipment**

**RoHS compliant**

### TYPES

	Output rating*		Package	Part No.				Packing quantity		
	Through hole terminal			Surface-mount terminal						
	Load voltage	Load current		Tube packing style		Tape and reel packing style	Tube	Tape and reel		
AC/DC dual use	400 V	120 mA	DIP6-pin	AQV234	AQV234A	AQV234AX	AQV234AZ	1 tube contains: 50 pcs. 1 batch contains: 500 pcs.	1,000 pcs.	

\*Indicate the peak AC and DC values.

Note: The surface mount terminal indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

### RATING

**1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)**

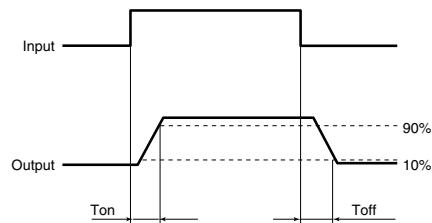
Item		Symbol	Type of connection	AQV234(A)		Remarks
Input	LED forward current	I <sub>F</sub>	A	50 mA		
	LED reverse voltage	V <sub>R</sub>		5 V		
	Peak forward current	I <sub>FP</sub>		1 A	f = 100 Hz, Duty factor = 0.1%	
	Power dissipation	P <sub>in</sub>		75 mW		
Output	Load voltage (Peak AC)	V <sub>L</sub>	B	400 V		
	Continuous load current	I <sub>L</sub>		0.12 A	A connection: Peak AC, DC B, C connection: DC	
	Peak load current	I <sub>peak</sub>		0.13 A		
	Power dissipation	P <sub>out</sub>		0.15 A		
Total power dissipation		P <sub>T</sub>		0.3 A	A connection: 100 ms (1 shot), V <sub>L</sub> = DC	
I/O isolation voltage		V <sub>iso</sub>		500 mW		
Ambient temperature	Operating	T <sub>opr</sub>		550 mW		
	Storage	T <sub>stg</sub>		1,500 Vrms		
				-40 to +85°C -40 to +185°F	(Non-icing at low temperatures)	
				-40 to +100°C -40 to +212°F		

# HS 1 Form A (AQV234)

## 2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV234(A)	Condition
Input	LED operate current	Typical Maximum	I <sub>Fon</sub>	—	0.31 mA
					0.5 mA $\Delta I_F / \Delta t \geq 100 \mu A/s$ I <sub>L</sub> = Max.
	LED turn off current	Minimum	I <sub>Foff</sub>	—	0.1 mA
		Typical			0.29 mA $\Delta I_F / \Delta t \geq 100 \mu A/s$ I <sub>L</sub> = Max.
Output	LED dropout voltage	Typical	V <sub>F</sub>	—	1.25 V (1.1 V at I <sub>F</sub> = 2 mA)
		Maximum			1.5 V I <sub>F</sub> = 50 mA
	On resistance	Typical	R <sub>on</sub>	A	30 Ω
		Maximum			50 Ω I <sub>F</sub> = 2 mA, I <sub>L</sub> = Max. Within 1 s
		Typical	R <sub>on</sub>	B	22.5 Ω
		Maximum			25 Ω I <sub>F</sub> = 2 mA, I <sub>L</sub> = Max. Within 1 s
Transistor characteristics	Typical	R <sub>on</sub>	C	—	11.3 Ω
					12.5 Ω I <sub>F</sub> = 2 mA, I <sub>L</sub> = Max. Within 1 s
	Off state leakage current	Maximum	I <sub>Leak</sub>	—	1 μA I <sub>F</sub> = 0 mA, V <sub>L</sub> = Max.
	Turn on time*	Typical	T <sub>on</sub>	—	0.89 ms
		Maximum			2 ms I <sub>L</sub> = Max.
Transistor characteristics	Turn off time*	Typical	T <sub>off</sub>	—	0.22 ms
		Maximum			1 ms I <sub>F</sub> = 2 mA I <sub>L</sub> = Max.
	I/O capacitance	Typical	C <sub>iso</sub>	—	0.8 pF
		Maximum			1.5 pF f = 1 MHz V <sub>B</sub> = 0 V
	Initial I/O isolation resistance	Minimum	R <sub>iso</sub>	—	1,000 MΩ
					500 V DC

\*Turn on/Turn off time



## 3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

Item	Symbol	Min.	Max.	Unit
LED current	I <sub>F</sub>	2	30	mA
AQV234(A)	V <sub>L</sub>	—	320	V
Load voltage (Peak AC)	I <sub>L</sub>	—	0.12	A
Continuous load current (A connection)	—	—	—	—

■ These products are not designed for automotive use.

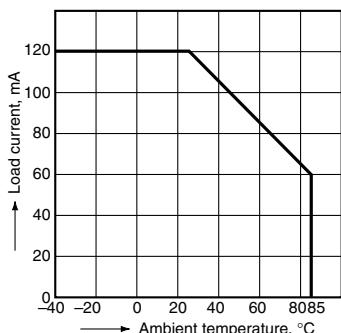
If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

## REFERENCE DATA

1. Load current vs. ambient temperature characteristics

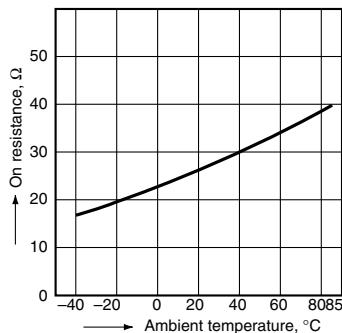
Allowable ambient temperature: -40 to +85°C  
-40 to +185°F

Type of connection: A



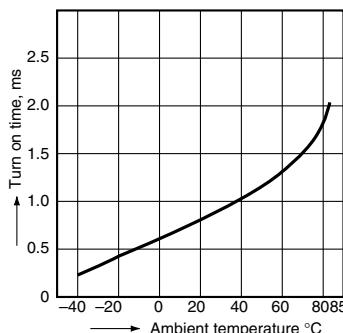
2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;  
LED current: 2 mA; Load voltage: 400 V (DC);  
Continuous load current: 120 mA (DC)



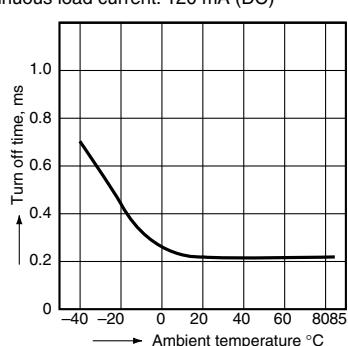
3. Turn on time vs. ambient temperature characteristics

LED current: 2 mA;  
Load voltage: 400 V (DC);  
Continuous load current: 120 mA (DC)

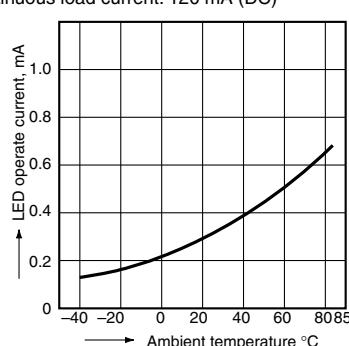


**4. Turn off time vs. ambient temperature characteristics**

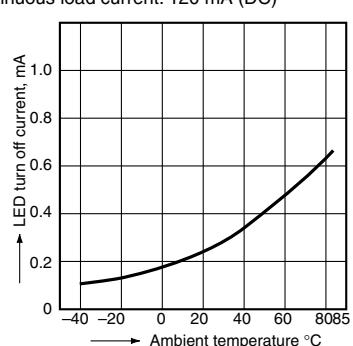
LED current: 2 mA; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC)

**5. LED operate current vs. ambient temperature characteristics**

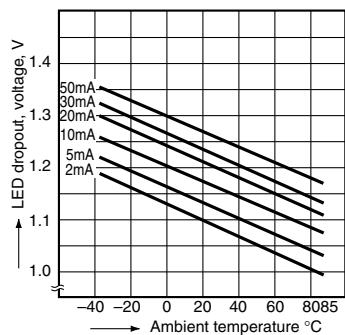
Load voltage: 400 V (DC); Continuous load current: 120 mA (DC)

**6. LED turn off current vs. ambient temperature characteristics**

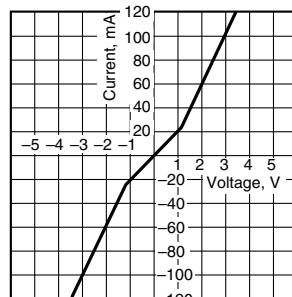
Load voltage: 400 V (DC); Continuous load current: 120 mA (DC)

**7. LED dropout voltage vs. ambient temperature characteristics**

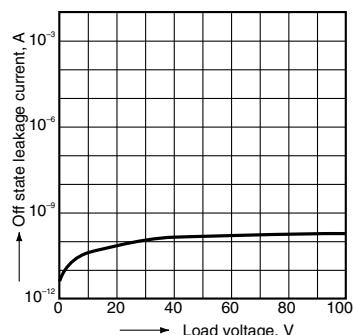
LED current: 2 to 50 mA

**8. Current vs. voltage characteristics of output at MOS portion**

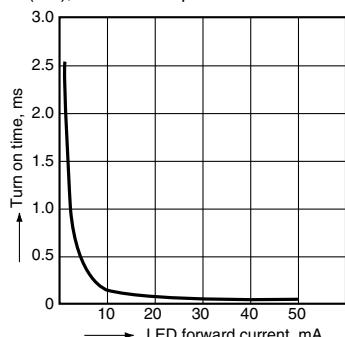
Measured portion: between terminals 4 and 6; Ambient temperature: 25°C 77°F

**9. Off state leakage current vs. load voltage characteristics**

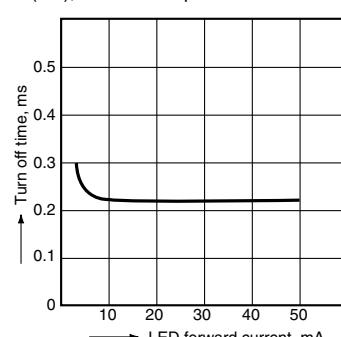
Measured portion: between terminals 4 and 6; Ambient temperature: 25°C 77°F

**10. Turn on time vs. LED forward current characteristics**

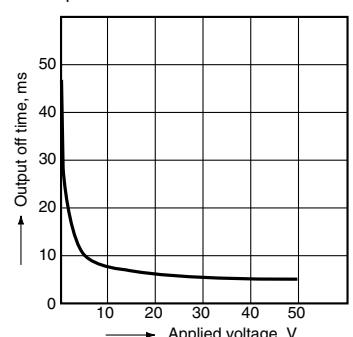
Measured portion: between terminals 4 and 6; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC); Ambient temperature: 25°C 77°F

**11. Turn off time vs. LED forward current characteristics**

Measured portion: between terminals 4 and 6; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC); Ambient temperature: 25°C 77°F

**12. Output capacitance vs. applied voltage characteristics**

Measured portion: between terminals 4 and 6; Frequency: 1 MHz; Ambient temperature: 25°C 77°F



"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

\*Recognized in Japan, the United States, all member states of European Union and other countries.

---

Please contact .....

**Panasonic Corporation**

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadomashi, Osaka 571-8506, Japan  
[industrial.panasonic.com/ac/e/](http://industrial.panasonic.com/ac/e/)

**Panasonic®**

©Panasonic Corporation 2017