
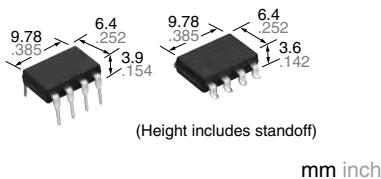


**Normally closed (2 Form B)  
DIP6-pin type  
Low on-resistance with  
400V load voltage**

PhotoMOS®

**HE 2 Form B  
(AQW454)**



**RoHS compliant**

### FEATURES

#### 1. 2 Form B (Normally-closed) type

Has been realized thanks to the built-in MOSFET processed by our proprietary method, DSD (Double-diffused and Selective Doping) method.

#### 2. Applicable for 2 Form B use as well as two independent 1 Form B use.

#### 3. Controls low-level analog signals

PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

#### 4. High sensitivity and low on-resistance

Can control max. 0.16 A load current with 5 mA input current. Low on-resistance of Typ. 11 Ω. (in case of using only 1 channel)

#### 5. Low-level off state leakage current of max. 1 μA

### TYPICAL APPLICATIONS

- Security equipment
- High-speed inspection machine
- Measuring instruments
- Telecommunication equipment
- Sensing equipment

### TYPES

Output rating*	Package		Part No.				Packing quantity			
			Through hole terminal		Surface-mount terminal					
			Load voltage	Load current	Tube packing style	Tape and reel packing style				
AC/DC dual use	400 V	120 mA	DIP8-pin	AQW454	AQW454A	Picked from the 1/2/3/4-pin side	AQW454AX	AQW454AZ	1 tube contains: 50 pcs. 1 batch contains: 500 pcs.	
						Picked from the 5/6/7/8-pin side			1,000 pcs	

\*Indicate the peak AC and DC values.

Note: The surface mount terminal indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

### RATING

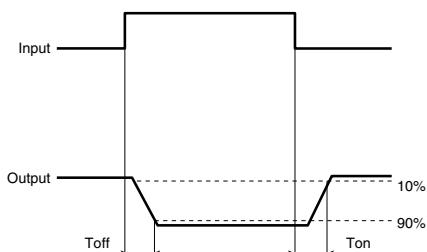
#### 1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	AQW454(A)	Remarks
Input	LED forward current	I <sub>F</sub>	50 mA	
	LED reverse voltage	V <sub>R</sub>	5 V	
	Peak forward current	I <sub>FP</sub>	1 A	f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P <sub>in</sub>	75 mW	
Output	Load voltage (peak AC)	V <sub>L</sub>	400 V	
	Continuous load current	I <sub>L</sub>	0.12 A (0.16 A)	A connection: Peak AC, DC ( ): in case of using only 1 channel
	Peak load current	I <sub>peak</sub>	0.36 A	A connection: 100 ms (1 shot), V <sub>L</sub> = DC
	Power dissipation	P <sub>out</sub>	800 mW	
Total power dissipation		P <sub>T</sub>	850 mW	
I/O isolation voltage		V <sub>iso</sub>	1,500 Vrms	
Ambient temperature	Operating	T <sub>opr</sub>	-40 to +85°C -40 to +185°F	(Non-icing at low temperatures)
	Storage	T <sub>stg</sub>	-40 to +100°C -40 to +212°F	

## 2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQW454(A)	Condition
Input	LED operate (OFF) current	Typical Maximum	I <sub>off</sub>	0.9 mA 3 mA I <sub>L</sub> = Max.
	LED reverse (ON) current	Minimum Typical	I <sub>on</sub>	0.4 mA 0.8 mA I <sub>L</sub> = Max.
Output	LED dropout voltage	Typical Maximum	V <sub>F</sub>	1.25 V (1.14 V at I <sub>F</sub> = 5 mA) 1.5 V I <sub>F</sub> = 50 mA
	On resistance	Typical Maximum	R <sub>on</sub>	11 Ω 16 Ω I <sub>F</sub> = 0 mA I <sub>L</sub> = Max. Within 1 s
Transfer characteristics	Off state leakage current	Maximum	I <sub>leak</sub>	1 μA I <sub>F</sub> = 5 mA V <sub>L</sub> = Max.
Transfer characteristics	Operate (OFF) time*	Typical Maximum	T <sub>off</sub>	1.2 ms 2 ms I <sub>F</sub> = 0 mA → 5 mA I <sub>L</sub> = Max.
	Reverse (ON) time*	Typical Maximum	T <sub>on</sub>	0.36 ms 1 ms I <sub>F</sub> = 5 mA → 0 mA I <sub>L</sub> = Max.
	I/O capacitance	Typical Maximum	C <sub>iso</sub>	0.8 pF 1.5 pF f = 1 MHz V <sub>B</sub> = 0 V
	Initial I/O isolation resistance	Minimum	R <sub>iso</sub>	1,000 MΩ 500 V DC

\*Operate/Reverse time



## 3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

Item	Symbol	Number of used channels	Min.	Max.	Unit
AQW454(A)	LED current	I <sub>F</sub>	5	30	mA
	Load voltage (Peak AC)	V <sub>L</sub>	—	320	V
	Continuous load current	I <sub>L</sub>	1ch 2ch	0.16 0.12	A

■ These products are not designed for automotive use.

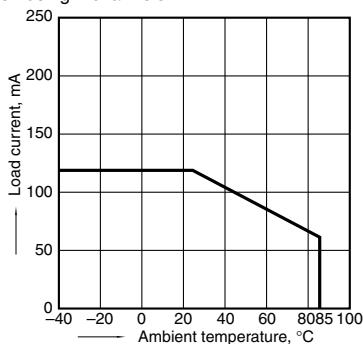
If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

## REFERENCE DATA

1. Load current vs. ambient temperature characteristics

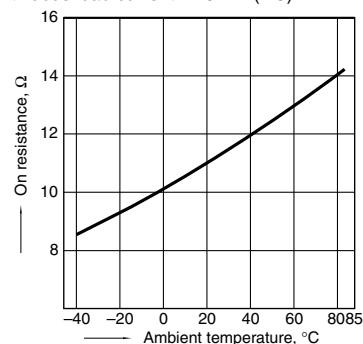
Allowable ambient temperature: -40 to +85°C  
-40 to +185°F

When using 2 channels



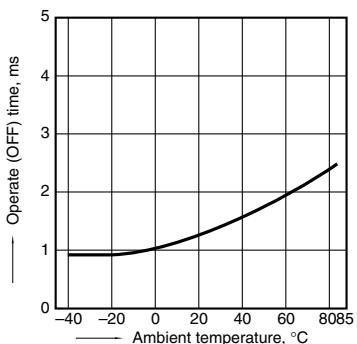
2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8; LED current: 0 mA; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC)



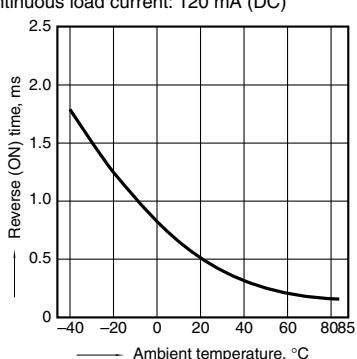
3. Operate (OFF) time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC)

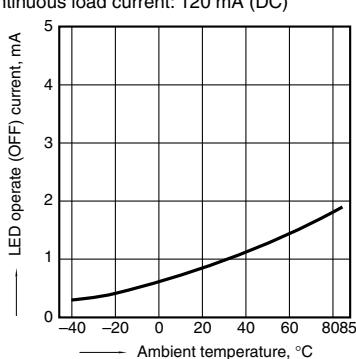


**4. Reverse (ON) time vs. ambient temperature characteristics**

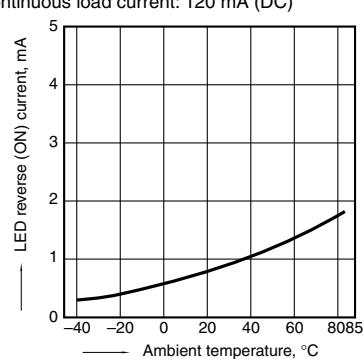
LED current: 5 mA; Load voltage: 400 V (DC);  
Continuous load current: 120 mA (DC)

**5. LED operate (OFF) current vs. ambient temperature characteristics**

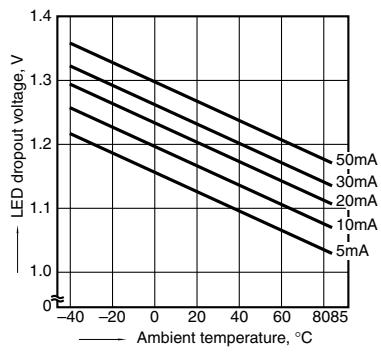
Load voltage: 400 V (DC);  
Continuous load current: 120 mA (DC)

**6. LED reverse (ON) current vs. ambient temperature characteristics**

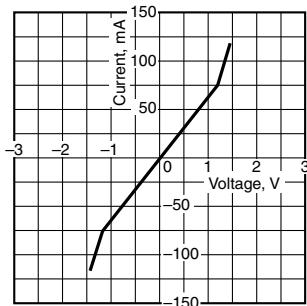
Load voltage: 400 V (DC);  
Continuous load current: 120 mA (DC)

**7. LED dropout voltage vs. ambient temperature characteristics**

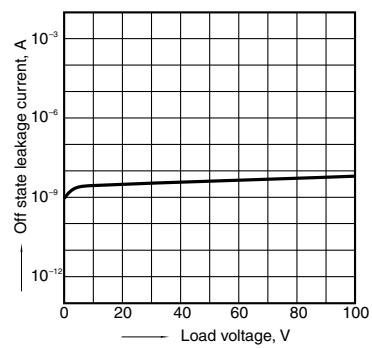
LED current: 5 to 50 mA

**8. Current vs. voltage characteristics of output at MOS portion**

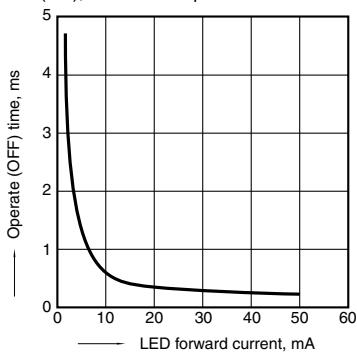
Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F

**9. Off state leakage current vs. load voltage characteristics**

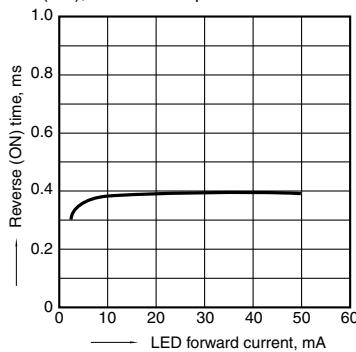
Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F

**10. Operate (OFF) time vs. LED forward current characteristics**

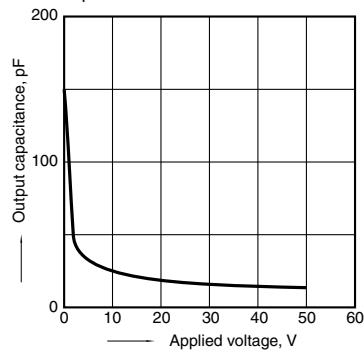
Measured portion: between terminals 5 and 6, 7 and 8; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC); Ambient temperature: 25°C 77°F

**11. Reverse (ON) time vs. LED forward current characteristics**

Measured portion: between terminals 5 and 6, 7 and 8; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC); Ambient temperature: 25°C 77°F

**12. Output capacitance vs. applied voltage characteristics**

Measured portion: between terminals 5 and 6, 7 and 8; Frequency: 1 MHz; Ambient temperature: 25°C 77°F



"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

\*Recognized in Japan, the United States, all member states of European Union and other countries.

---

Please contact .....

**Panasonic Corporation**

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadomashi, Osaka 571-8506, Japan  
[industrial.panasonic.com/ac/e/](http://industrial.panasonic.com/ac/e/)

**Panasonic®**

©Panasonic Corporation 2017