

Surge protection device - TT-ST-2/2-24DC - 2858881

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Spring cage modular terminal block with integrated surge protection, for assembly on NS 35/7.5, voltage U_N 24 V DC, terminal width: 6.2 mm, cover width: 2.2 mm

Product Features

- ✓ Multi-stage modular terminal blocks with spring-cage connection
- ✓ Disconnection of signal circuits by disconnect knife



Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	27.42 GRM
Custom tariff number	85363030
Country of origin	Germany

Technical data

Dimensions

Height	100 mm
Width	6.2 mm
Depth	63.5 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
Degree of protection	IP20

General

Housing material	PA 6.6
Inflammability class according to UL 94	V2

Surge protection device - TT-ST-2/2-24DC - 2858881

Technical data

General

Color	black
Standards for air and creepage distances	EN 60664-1
	IEC 60664-1
Surge voltage category	III
Pollution degree	2
Mounting type	DIN rail: 35 mm
Type	Double-level terminal block
Number of positions	2
Direction of action	Line-Earth Ground

Protective circuit

IEC test classification	C1
	C2
	C3
	D1
VDE requirement class	C1
	C2
	C3
	D1
Nominal voltage U_N	24 V DC
Maximum continuous operating voltage U_C	30 V DC
	21 V AC
Maximum continuous voltage U_C (wire-ground)	30 V DC
	21 V AC
Nominal current I_N	300 mA (45°C)
Operating effective current I_C at U_C	$\leq 10 \mu A$ (per path)
Residual current I_{PE}	$\leq 20 \mu A$
Nominal discharge current I_n (8/20) μs (Core-Earth)	5 kA
Total surge current (8/20) μs	10 kA
Total surge current (10/350) μs	2 kA
Max. discharge current I_{max} (8/20) μs maximum (Core-Earth)	5 kA
Nominal pulse current I_{an} (10/1000) μs (Core-Earth)	100 A
	200 A (in total)
Impulse discharge current (10/350) μs , peak value I_{imp}	1 kA (per path)
Output voltage limitation at 1 kV/ μs (Core-Earth) spike	$\leq 40 V$
Output voltage limitation at 1 kV/ μs (Core-Earth) static	$\leq 40 V$
Residual voltage at I_n , (conductor-ground)	$\leq 40 V$

Surge protection device - TT-ST-2/2-24DC - 2858881

Technical data

Protective circuit

Residual voltage with I_{an} (10/1000) μ s (conductor-ground)	≤ 45 V
Voltage protection level U_p (Core-Earth)	≤ 80 V (C2 (10 kV/5 kA))
	≤ 40 V (static)
Response time t_A (Core-Earth)	≤ 1 ns
Input attenuation a_E , asym.	typ. 0.6 dB (500 kHz/50 Ω system)
	typ. 0.1 dB (170 kHz/150 Ω system)
	typ. 0.1 dB (40 kHz/600 Ω system)
Cut-off frequency f_g (3 dB), asym. (PE) in 50 Ohm system	typ. 3 MHz
Cut-off frequency f_g (3 dB), asym. (PE) in 150 Ohm system	typ. 1 MHz
Cut-off frequency f_g (3 dB), asym. (PE) in 600 Ohm system	typ. 250 kHz
Capacity (Core-Earth)	2 nF
Resistance in series	9.4 $\Omega \pm 10$ % (per path)
	9.4 Ω
Surge protection fault message	None
Max. required back-up fuse	315 mA
Surge current resistance (conductor-ground)	C2 - 10 kV/5 kA
	D1 - 1 kA
	C3 - 100 A

Connection data

Connection method	Spring-cage connection
Connection type IN	Spring-cage
Connection type OUT	Spring-cage
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12

Classifications

eCl@ss

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130807

Surge protection device - TT-ST-2/2-24DC - 2858881

Classifications

eCl@ss

eCl@ss 7.0	27130807
eCl@ss 8.0	27130807

ETIM

ETIM 2.0	EC000943
ETIM 3.0	EC000943
ETIM 4.0	EC000943
ETIM 5.0	EC000943

UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

Approvals

Approvals

Approvals

GOST / GOST / UL Listed / GL

Ex Approvals

Approvals submitted

Approval details

GOST 
--

GOST 
--

Surge protection device - TT-ST-2/2-24DC - 2858881

Approvals

UL Listed 

GL

Accessories

Accessories

End cover

End cover - TT-D-STTCO-BK - 2858894



End cover for TERMITRAB TT-ST-..., width: 2.2 mm, color: Black

Labeled terminal marker

Zack Marker strip, flat - ZBF 6,LGS:FORTL.ZAHLEN - 0808749



Zack Marker strip, flat, Strip, white, labeled, Printed horizontally: Consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - 100, Mounting type: Snap into flat marker groove, for terminal block width: 6.2 mm, Lettering field: 5.15 x 6.15 mm

Marker pen

Marker pen - B-STIFT - 1051993



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

Terminal marking

Surge protection device - TT-ST-2/2-24DC - 2858881

Accessories

Zack Marker strip, flat - ZBF 6:UNBEDRUCKT - 0808710



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: Plotter, Mounting type: Snap into flat marker groove, for terminal block width: 6.2 mm, Lettering field: 5.15 x 6.15 mm


Zack Marker strip, flat - ZBF 6/WH-100:UNBEDRUCKT - 0808736




Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: Plotter, Mounting type: Snap into flat marker groove, for terminal block width: 6.2 mm, Lettering field: 5.15 x 6.15 mm

Drawings

Dimensioned drawing

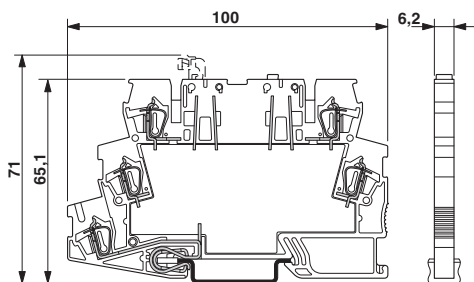

Circuit diagram

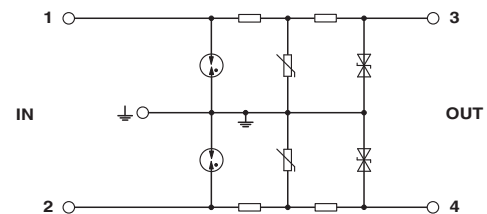

Surge protection device - TT-ST-2/2-24DC - 2858881

Catalog photo

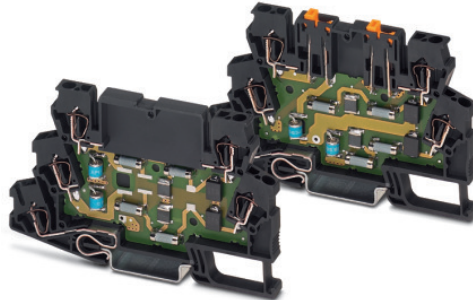


Figure may contain other products.