

Multiplexer - SD FLASH 512MB MODULAR MUX - 2701872

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Similar figure

Two of these SD cards, with two ILC 131 ETHs and the individually required input and output terminals, form a multiplexer system that requires no programming. Easy configuration via a small number of wire jumpers. Wireless, Ethernet cable or network connection.

Product description

The basic function of the SD FLASH 512MB MODULAR MUX is aimed at those who wish to utilize the advantages of a flexible multiplexer solution without having to program controllers. To enable this, the required minimum configuration is implemented via a small number of wire jumpers. Standard components (2 x ILC 131 ETH; 2 x SD FLASH 512MB MODULAR MUX) are used for this. The necessary input and output terminals are also used. Communication between the two multiplexer components (ILC 131 ETH) is then established fully automatically via an Ethernet cable or a transparent wireless transmission.

The two multiplexers can be integrated into an Ethernet network as an option. The required Ethernet configuration is implemented via the web interface of the ILC 131 ETH. This can be done simply using a PC and a standard browser.

The following standard components are required:

- 2 x ILC 131 ETH (Order No. 2700973)
- 2 x SD FLASH 512MB MODULAR MUX (Order No. 2701872)

To connect the two systems, an Ethernet cable (wired communication) or

1 x FL BT EPA AIR SET (Order No. 2693091) (wireless communication) is required.

The specified number of input and output terminals from the Inline Modular range from Phoenix Contact (marked with logo, see below) is also required.

All wireless systems that can transmit TCT/IP data transparently can be used to connect the ILC 131 ETH to a multiplexer system.

The following Phoenix Contact wireless products are suitable for this:

- 1 x FL BT EPA AIR SET (Order No. 2693091)
- 2 x FL WLAN EPA (Order No. 2692791)
- Plus WLAN Ethernet components in the FL WLAN 24 XX 802-11 series



Key commercial data

Packing unit	1
GTIN	 4 046356 868686
Custom tariff number	85235199

Multiplexer - SD FLASH 512MB MODULAR MUX - 2701872

Technical data

Product type	Multiplexer
--------------	-------------

Classifications

eCl@ss

eCl@ss 4.0	27240403
eCl@ss 4.1	27240403
eCl@ss 5.0	27242212
eCl@ss 5.1	27242212
eCl@ss 6.0	19150702
eCl@ss 7.0	19150702
eCl@ss 8.0	19150702

ETIM

ETIM 4.0	EC000192
ETIM 5.0	EC000192

UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	39121311
UNSPSC 12.01	32101601
UNSPSC 13.2	32101601

Accessories

Accessories

Controller

Controller - ILC 131 ETH - 2700973




The controller enables integration of I/O signals from MODBUS periphery devices into the control program via MODBUS/TCP. Programming takes place with PC Worx Express or PC Worx (IEC 61131-3).

Drawings

Multiplexer - SD FLASH 512MB MODULAR MUX - 2701872

Application drawing

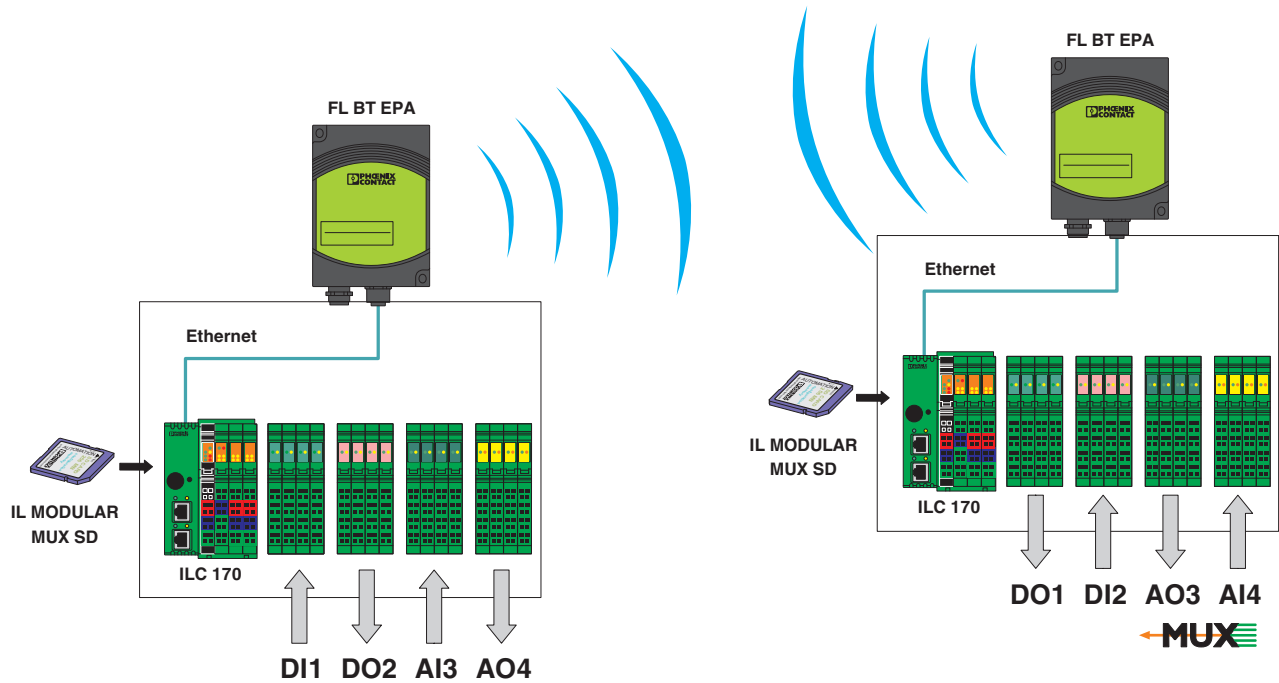

The software on the SD FLASH 512MB MODULAR MUX CompactFlash[®] card transforms the ILC 131 ETH and the individual input and output terminals required into a flexible field multiplexer. As a wireless connection or as a point-to-point connection in an Ethernet network.