

Current transducers - MCR-SLP-1-5-UI-0 - 2814359

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




MCR passive current measuring transducer, for sinusoidal alternating currents 0..1 A AC/0..5 A AC, without switching output, output signal 0..10 V/0..20 mA

Product Features

- Loop-powered
- 1 A and 5 A AC measuring ranges, reconnectable



Key commercial data

Packing unit	1 pc
GTIN	 4 017918 148447
Weight per Piece (excluding packing)	232.4 GRM
Custom tariff number	85437090
Country of origin	Germany

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Dimensions

Width	22.5 mm
Height	99 mm
Depth	114.5 mm

Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C
---------------------------------	------------------

Current transducers - MCR-SLP-1-5-UI-0 - 2814359

Technical data

Ambient conditions

Degree of protection	IP20
----------------------	------

Input data

Input	Current measuring input 1 A
Input current range	0 A AC ... 1 A AC
Impulse form	Sine
Overload capacity	2 x I _N (5 min. at 60°C ambient temperature)
Surge strength	50 A (1 s)
Permissible output range	1.2 x I _N
Nominal frequency f _N	50 Hz
Frequency measuring range	45 Hz ... 60 Hz
Power loss	1.6 VA (at I _A = 20 mA)
Connection method	Screw connection
Input	Current measuring input 5 A
Input current range	0 A AC ... 5 A AC
Impulse form	Sine
Overload capacity	2 x I _N (5 min. at 60°C ambient temperature)
Surge strength	100 A (1 s)
Permissible output range	1.2 x I _N
Nominal frequency f _N	50 Hz
Frequency measuring range	45 Hz ... 60 Hz
Power loss	2.2 VA (at I = 20 mA)
Connection method	Screw connection

Output data

Output name	Voltage output
Voltage output signal	0 V ... 10 V
Max. output voltage	20 V
Load/output load voltage output	> 100 kΩ
Output name	Current output
Current output signal	0 mA ... 20 mA
Max. output current	30 mA
Load/output load current output	< 750 Ω
Residual ripple, in reference to the measured value	0.5 % (pp of measured value)

Switching output

Output name	No switching output
-------------	---------------------

Connection data

Current transducers - MCR-SLP-1-5-UI-0 - 2814359

Technical data

Connection data

Connection method	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max.	14
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Stripping length	8 mm
Screw thread	M3

General

Maximum transmission error	< 0.5 % (of final value)
Maximum temperature coefficient	< 0.015 %/K
Step response (10-90%)	< 200 ms
Protective circuit	Transient protection in the output Suppressor diode
Surge voltage category	III
Pollution degree	2
Rated insulation voltage	300 V AC (to earth)
Test voltage input/output	4 kV (50 Hz, 1 min.)
Color	green
Housing material	Polyamide PA non-reinforced
Mounting position	< 50°C: Any; > 50°C: Vertical (installation on horizontal DIN rail)
Conformance	CE-compliant

Classifications

eCl@ss

eCl@ss 4.0	27200303
eCl@ss 4.1	27200303
eCl@ss 5.0	27200303
eCl@ss 5.1	27200303
eCl@ss 6.0	27200303
eCl@ss 7.0	27142316
eCl@ss 8.0	27142316

ETIM

ETIM 2.0	EC001440
ETIM 3.0	EC001440

Current transducers - MCR-SLP-1-5-UI-0 - 2814359

Classifications

ETIM

ETIM 4.0	EC001440
ETIM 5.0	EC002475

UNSPSC

UNSPSC 6.01	30211506
UNSPSC 7.0901	39121008
UNSPSC 11	39121008
UNSPSC 12.01	39121008
UNSPSC 13.2	39121008

Approvals

Approvals


Approvals

UL Recognized / cUL Recognized / GOST / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

UL Recognized 

cUL Recognized 
--



GOST 
--

Current transducers - MCR-SLP-1-5-UI-0 - 2814359

Approvals



Drawings

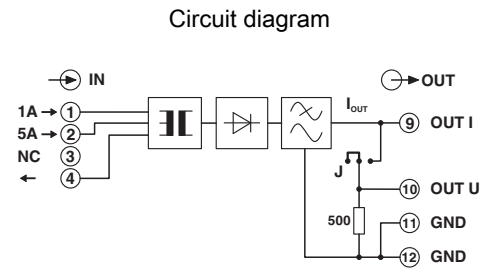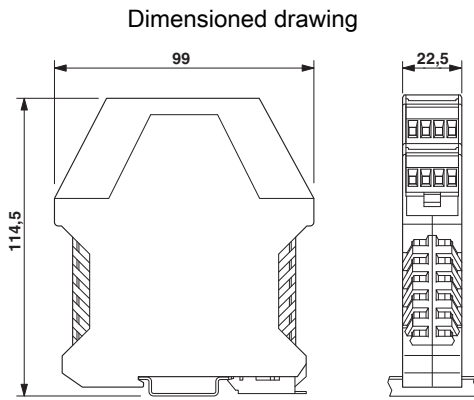

Current transducers - MCR-SLP-1-5-UI-0 - 2814359

Catalog photo



Figure may contain other products.