

Interface module - VIP-3/PT/PDM-2/48 - 2903800

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, with two equipotential busbars (P1, P2) for potential distribution, for mounting on NS 35 rails. Module width: 97.7 mm



Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	250.0 g
Custom tariff number	85369010
Country of origin	United States

Technical data

Dimensions

Width	97.7 mm
Height	75.8 mm
Depth	63 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Nominal voltage U_N	250 V AC/DC
Max. current carrying capacity per branch	15 A
Total current	30 A (per potential)
Potential connections	Per potential(P1, P2) 2 power/24 distributor terminal blocks
Mounting position	any
Standards/regulations	IEC 60664
	DIN EN 50178

Interface module - VIP-3/PT/PDM-2/48 - 2903800

Technical data

General

	IEC 62103
Pollution degree	2
Surge voltage category	III

Connection data, supply

Conductor cross section solid min.	0.25 mm ²
Conductor cross section solid max.	6 mm ²
Conductor cross section flexible min.	0.25 mm ²
Conductor cross section flexible max.	4 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	10
Connection method	Push-in-/Spring-cage connection
Stripping length	15 mm

Connection data, distribution

Conductor cross section solid min.	0.14 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section flexible min.	0.14 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section AWG min.	26
Conductor cross section AWG max.	14
Connection method	Push-in connection
Stripping length	8 mm

Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242608
eCl@ss 7.0	27242608
eCl@ss 8.0	27141152

ETIM

ETIM 3.0	EC001604
ETIM 4.0	EC001604

Interface module - VIP-3/PT/PDM-2/48 - 2903800

Classifications

ETIM

ETIM 5.0	EC002780
----------	----------

UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

Approvals

Approvals

Approvals

CSA / UL Recognized / cUL Recognized / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

CSA	
mm ² /AWG/kcmil	26-14
Nominal current IN	15 A
Nominal voltage UN	250 V

UL Recognized	
mm ² /AWG/kcmil	26-14
Nominal current IN	15 A

Interface module - VIP-3/PT/PDM-2/48 - 2903800

Approvals


Nominal voltage UN	250 V
--------------------	-------

cUL Recognized	
mm ² /AWG/kcmil	26-14
Nominal current IN	15 A
Nominal voltage UN	250 V

cULus Recognized	
------------------	--

Drawings

Dimensional drawing

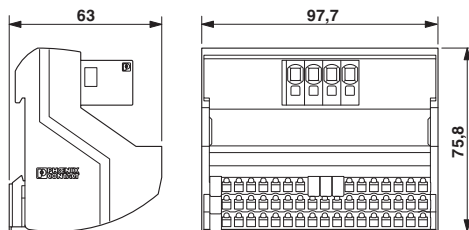

Circuit diagram

