PHŒNIX CONTACT

RJ45 sleeve housings - VS-08-T-H-RJ45/IP67 - 1652732

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)

RJ45 sleeve housings, Degree of protection: IP67, Number of positions: 8, Material: PA, Cable exit: straight

Product Features

☑ High-quality and inexpensive solution in the IP protection zone

☑ Simple operation

☑ IP65/67

Ethernet

Key Commercial Data

Packing unit	1 pc
Minimum order quantity	5 pc
Weight per Piece (excluding packing)	14.12 g
Custom tariff number	85472000
Country of origin	Germany

Technical data

Mechanical characteristics

Number of positions	8
Insertion/withdrawal cycles	≥ 1000
External cable diameter	5 mm ... 8.5 mm
Cable exit	straight
Color	traffic grey A RAL 7042

Ambient conditions

Ambient temperature (operation)	-40 °C ... 80 °C
Degree of protection	IP67

Material data

Flammability rating according to UL 94	V0

RJ45 sleeve housings - VS-08-T-H-RJ45/IP67 - 1652732

Technical data

Material data

Housing material	PA
O-ring material	FPM
Cable seal material	NBR
Material housing intermediate seal	NBR

Electrical characteristics

Number of positions	8
Overvoltage category	I
Degree of pollution	2

Standards and Regulations

Order No.	1652732
Product key	ABNACC
Flammability rating according to UL 94	V0

Classifications

eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260705
eCl@ss 7.0	27440309
eCl@ss 8.0	27440202
eCl@ss 9.0	27440202

ETIM

ETIM 2.0	EC000764
ETIM 3.0	EC001121
ETIM 4.0	EC001121
ETIM 5.0	EC000437

UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

PHŒNIX CONTACT

RJ45 sleeve housings - VS-08-T-H-RJ45/IP67 - 1652732

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approvals submitted

Approval details

EAC

Accessories

Accessories

Male insert

RJ45 male insert - VS-08-ST-H11-RJ45 - 1652716

RJ45 pin insert, CAT5e, 8-pos., shielded, IDC connection method, for litz wires AWG 27 ... 26, with strain relief

RJ45 male insert - VS-08-ST-H21-RJ45 - 1652729

RJ45 male insert, CAT6, 8-pos., shielded, IDC displacement connection, for litz wire AWG 25 ... 24 and solid wires AWG 24, with strain relief

RJ45 sleeve housings - VS-08-T-H-RJ45/IP67 - 1652732

Accessories

RJ45 male insert - VS-08-RJ45-10G/C - 1418853

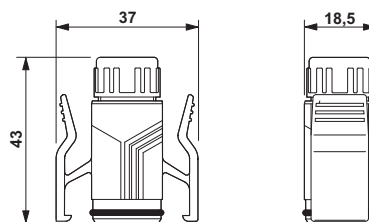Male insert RJ45, CAT6$_A$, 10 Gigabit

Protective cover

Protective covers - VS-SCRJ-PC - 1653757

IP67 protective cover, for covering the male inserts in the sleeve housings IP67, VS-SC-RJ-..., VS-04-..., VS-06-... and VS-08-...

Drawings

Dimensional drawing

37

18,5

43

RJ45 sleeve housing IP67