

Base strip - MSTBO 2,5/ 3 G1R THRR44 BK - 2915229


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Header, Nominal current: 16 A, Rated voltage (III/2): 320 V, Number of positions: 3, Pitch: 5 mm, Mounting: Taped SMD/THT/THR components

Product Features

- For ME/ME MAX electronics housing
- 5 mm pitch
- Plug-in direction orthogonal to the PCB
- Orthogonal headers for through hole reflow process
- 2, 3, and 4-pos.
- Made from high-temperature-resistant polyamide for use in lead-free soldering processes.
- Supplied taped as standard, in bulk as an option
- Integrated suction surface



Key Commercial Data

Packing unit	1 pc
Minimum order quantity	170 pc
Weight per Piece (excluding packing)	5.06 g
Custom tariff number	85366990
Country of origin	Poland

Technical data

Dimensions

Pitch	5.00 mm
Dimension a	10 mm
Length of the solder pin	3.5 mm
Pin dimensions	1 x 1

Base strip - MSTBO 2,5/ 3 G1R THRR44 BK - 2915229

Technical data

Dimensions

Pin spacing	5.00 mm
Hole diameter	1.6 mm

General

Range of articles	MSTBO 2,5/..-G1R-THR
Insulating material group	I
Rated surge voltage (III/3)	4 kV
Rated surge voltage (III/2)	4 kV
Rated surge voltage (II/2)	4 kV
Rated voltage (III/3)	250 V
Rated voltage (III/2)	320 V
Rated voltage (II/2)	400 V
Connection in acc. with standard	EN-VDE
Nominal current I _N	16 A
Maximum load current	16 A
Insulating material	PA
Flammability rating according to UL 94	V0
Number of positions	3

Standards and Regulations

Connection in acc. with standard	EN-VDE
	CUL
Flammability rating according to UL 94	V0

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402
eCl@ss 8.0	27440402
eCl@ss 9.0	27440402

ETIM

ETIM 3.0	EC001121
----------	----------

Base strip - MSTBO 2,5/ 3 G1R THRR44 BK - 2915229

Classifications

ETIM

ETIM 4.0	EC002637
ETIM 5.0	EC002637

UNSPSC

UNSPSC 6.01	30211801
UNSPSC 7.0901	39121432
UNSPSC 11	34131203
UNSPSC 12.01	39121432
UNSPSC 13.2	39121432

Approvals

Approvals


Approvals


UL Recognized / cUL Recognized / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

UL Recognized 		
	B	D
Nominal current I _N	16 A	10 A
Nominal voltage U _N	300 V	300 V

cUL Recognized 		
	B	D
Nominal current I _N	16 A	10 A
Nominal voltage U _N	300 V	300 V


Base strip - MSTBO 2,5/ 3 G1R THRR44 BK - 2915229

Approvals




Drawings


Drilling diagram




Diagram

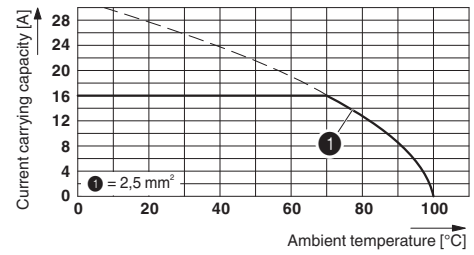

Dimensional drawing

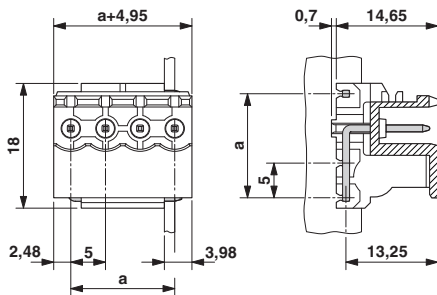


Dimensional drawing

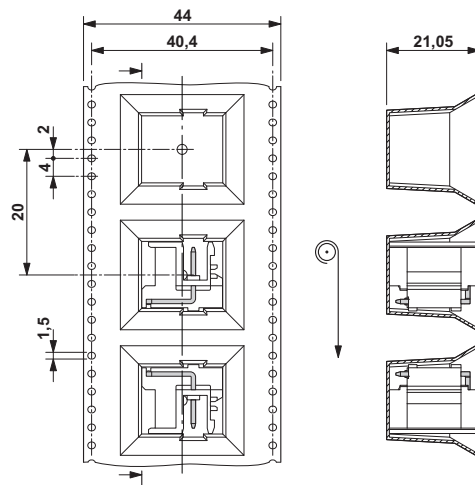

Base strip - MSTBO 2,5/ 3 G1R THRR44 BK - 2915229

Schematic diagram

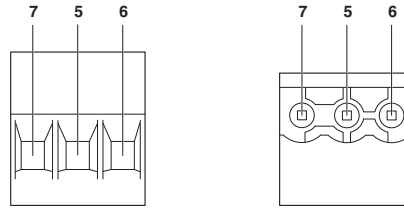

Pin assignment right

Dimensional drawing

