


PCB terminal block - SPT 16/ 1-V-10,0 RD - 1708574

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




PCB terminal block, Nominal current: 76 A, Nom. voltage: 1000 V, Number of positions: 1, Connection method: Push-in spring connection, Mounting: Wave soldering, Color: red

The figure shows the standard item

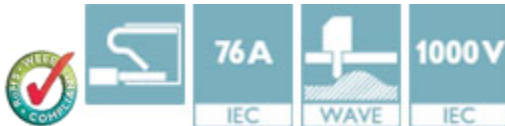

Key Commercial Data

Packing unit	1
GTIN	 4 055626 014722
Custom tariff number	85369010

Classifications

eCl@ss

eCl@ss 5.1	27141190
eCl@ss 6.0	27261101
eCl@ss 8.0	27440401
eCl@ss 9.0	27440401

ETIM

ETIM 5.0	EC002643
----------	----------

Approvals

Approvals

Approvals

SEV / UL Recognized / cUL Recognized / IECCE CB Scheme / EAC / EAC / cULus Recognized

PCB terminal block - SPT 16/ 1-V-10,0 RD - 1708574


Approvals


Ex Approvals


Approvals submitted

Approval details

SEV	
mm ² /AWG/kcmil	16
Nominal current I _N	76 A
Nominal voltage U _N	1000 V

UL Recognized 		
	B	C
mm ² /AWG/kcmil	20-4	20-4
Nominal current I _N	66 A	66 A
Nominal voltage U _N	600 V	600 V

cUL Recognized 		
	B	C
mm ² /AWG/kcmil	20-4	20-4
Nominal current I _N	66 A	66 A
Nominal voltage U _N	600 V	600 V


IECEE CB Scheme 	
Nominal current I _N	76 A
Nominal voltage U _N	1000 V

PCB terminal block - SPT 16/ 1-V-10,0 RD - 1708574

Approvals


EAC

EAC

cULus Recognized 

Drawings

Drilling diagram



Dimensional drawing

