

Crimp contact - RC-22P2000 - 1603321

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Crimp contact, Rolled, Single contact, Contact diameter: 1 mm, Crimp range: 0.22 mm²...0.56 mm²



Why buy this product

- Crimping connection: vibration- and temperature-resistant assembly
- High tensile strength of the connection
- Low contact resistance
- Easy production monitoring
- Variable production run startup, thanks to full or semi-automation



Key Commercial Data

Packing unit	1 STK
Minimum order quantity	100 STK
Weight per Piece (excluding packing)	1.04 g
Custom tariff number	85389099
Country of origin	Germany

Technical data

General

Contact type	Rolled
Contact diameter	1 mm
Type of contact	Male connector
Connection type	Crimp connection
Insertion/withdrawal cycles mechanical	50
Litz wire cross section min.	0.22 mm ²

Crimp contact - RC-22P2000 - 1603321


Technical data

General

Litz wire cross section max.	0.56 mm ²
Contact material	Copper alloy
Contact surface	Nickel-plated (Ni), with gold coating (Au)

Drawings

Dimensional drawing

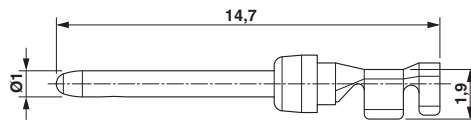

Dimensional drawing

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27261204
eCl@ss 7.0	27440205
eCl@ss 8.0	27440204
eCl@ss 9.0	27440204

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC000796
ETIM 5.0	EC000796

UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404
UNSPSC 13.2	43201404

Crimp contact - RC-22P2000 - 1603321

Accessories

Accessories

Crimping tool

Crimping pliers - RC-Z2130 - 1604267



Crimping pliers for rolled RC crimp contacts \varnothing 1 mm, litz wire cross section of 0.08 mm² ... 0.56 mm²