

Safety relays - PSR-SCP- 24DC/MXF1/4X1/2X2/B - 2902725

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Multifunctional safety relay for emergency stop and safety doors up to SIL 3, Cat. 4, PL e, automatically or manually monitored activation, 4 N/O contacts, 3 safety functions, 2 shutdown levels, plug-in screw terminal block

Why buy this product

- Up to Cat.4/PL e according to EN ISO 13849-1, SILCL 3 according to EN 62061, SIL 3 according to IEC 61508
- 3 safety functions in one device
- Low housing width of only 22.5mm
- No software configuration required
- Also available with push-in connection



Key Commercial Data

| | |
|--------------------------------------|----------|
| Packing unit | 1 STK |
| Weight per Piece (excluding packing) | 300.0 g |
| Custom tariff number | 85371099 |
| Country of origin | Germany |

Technical data

Note

| | |
|-------------------------|---|
| Utilization restriction | EMC: class A product, see manufacturer's declaration in the download area |
|-------------------------|---|

Dimensions

| | |
|--------|----------|
| Width | 22.5 mm |
| Height | 112.2 mm |
| Depth | 114.5 mm |

Ambient conditions

Safety relays - PSR-SCP- 24DC/MXF1/4X1/2X2/B - 2902725

Technical data

Ambient conditions

| | |
|--|---|
| Ambient temperature (operation) | -20 °C ... 45 °C (see derating curve) |
| Ambient temperature (storage/transport) | -25 °C ... 85 °C |
| Max. permissible relative humidity (operation) | 75 % (on average, 85% infrequently, non-condensing) |
| Max. permissible humidity (storage/transport) | 75 % (on average, 85% infrequently, non-condensing) |
| Maximum altitude | ≤ 2000 m (Above sea level) |

Input data

| | |
|---|---|
| Nominal input voltage U_N | 24 V DC |
| Input voltage range in reference to U_N | 0.85 ... 1.1 |
| Typical input current at U_N | 125 mA (with actuated relays) |
| | 55 mA (Two-channel 24 V/0 V + max. 200 mA control (message outputs 32/62) with non-actuated relays) |
| Current consumption | typ. 5 mA (I_{max}/I_x inputs) |
| | 20 mA (in electric torque) |
| Voltage at input/start and feedback circuit | 24 V -15 %; +10 % (first channel: 24 V; second channel: 0 V) |
| Typical response time | 175 ms (monitored/manual start) |
| | 250 ms (automatic start) |
| Typ. starting time with U_s | 250 ms (when controlled via A1) |
| Typical release time | 25 ms (when controlled via S11/I1, I3, I5 and S21/I2, I4, I6) |
| | 20 ms (when controlled via A1) |
| Concurrence input 1/2 | ∞ |
| Recovery time | 1 s (Availability time after activation of sensor circuit: 100ms) |
| Status display | 5 green LEDs |
| Maximum switching frequency | 0.5 Hz |
| Max. permissible overall conductor resistance | 100 Ω |
| Filter time | max. 1.5 ms (Test pulse duration; for all equivalent inputs) |
| | min. 7.5 ms (Test pulse rate; for all equivalent inputs) |

Output data

| | |
|-----------------------------|--------------------------------------|
| Contact type | 4 enabling current paths |
| | 2 semiconductor alarm outputs |
| Contact material | AgCuNi, +0,2 -0,4 μm Au |
| Minimum switching voltage | 10 V AC/DC |
| Maximum switching voltage | 250 V AC/DC |
| Limiting continuous current | 6 A (N/O contact) |
| | max. 100 mA (Alarm output (24 V DC)) |
| Inrush current, minimum | 10 mA |
| Maximum inrush current | 6 A |

Safety relays - PSR-SCP- 24DC/MXF1/4X1/2X2/B - 2902725

Technical data

Output data

| | |
|--|--|
| Sq. Total current | 72 A ² ($I_{TH}^2 = I_1^2 + I_2^2 + I_3^2 + I_4^2$) |
| Interrupting rating (ohmic load) max. | 1500 VA (250 V AC, $\tau = 0$ ms) |
| | 66 W (220 V DC, $\tau = 0$ ms) |
| | 66 W (110 V DC, $\tau = 0$ ms) |
| | 100 W (48 V DC, $\tau = 0$ ms) |
| | 144 W (24 V DC, $\tau = 0$ ms) |
| Maximum interrupting rating (inductive load) | 48 W (24 V DC, $\tau = 40$ ms) |
| | 43 W (48 V DC, $\tau = 40$ ms) |
| Switching capacity min. | 0.1 W |
| Output fuse | 6 A gL/gG NEOZED (N/O contact) |
| | 4 A gL/gG NEOZED (for low-demand applications) |

General

| | |
|---|---|
| Relay type | Electromechanical relay with forcibly guided contacts in accordance with EN 50205 |
| Mechanical service life | 10 x 10 ⁶ cycles |
| Nominal operating mode | 100% operating factor |
| Net weight | 99.99 g |
| Mounting type | DIN rail mounting |
| Assembly instructions | See derating curve |
| Mounting position | vertical or horizontal |
| Degree of protection | IP20 |
| Min. degree of protection of inst. location | IP54 |
| Control | one and two channel |
| Housing color | yellow |

Connection data

| | |
|---------------------------------------|---------------------|
| Connection method | Screw connection |
| pluggable | Yes |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 2.5 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 2.5 mm ² |
| Conductor cross section AWG min. | 24 |
| Conductor cross section AWG max. | 12 |
| Stripping length | 7 mm |
| Screw thread | M3 |

Safety-related characteristic data

Safety relays - PSR-SCP- 24DC/MXF1/4X1/2X2/B - 2902725

Technical data

Safety-related characteristic data


| | |
|---|--|
| Stop category | 0 |
| Safety Integrity Level (SIL) | 3 |
| | 3 |
| Designation | EN ISO 13849 |
| Performance level (PL) | e (5 A DC13; 3 A AC15; 8760 cycles/year) |
| Category | 4 |
| Safety Integrity Level Claim Limit (SIL CL) | 3 |
| Designation | IEC 50156 |
| Safety Integrity Level (SIL) | 3 |

Standards and Regulations


| | |
|--------------------------------|--|
| Designation | Air clearances and creepage distances between the power circuits |
| Standards/regulations | DIN EN 50178/VDE 0160 |
| Rated insulation voltage | 250 V AC |
| Rated surge voltage/insulation | 4 kV/basic isolation (safe isolation, reinforced insulation and 6 kV between input circuit, enabling current paths and safety circuit 1 (13/14, 23/24) and safety circuit 2 (43/44, 53/54).) |
| Degree of pollution | 2 |
| Overvoltage category | III |

Drawings

Circuit diagram

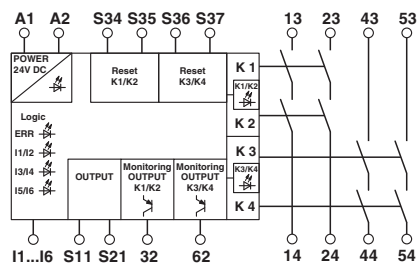


Circuit diagram

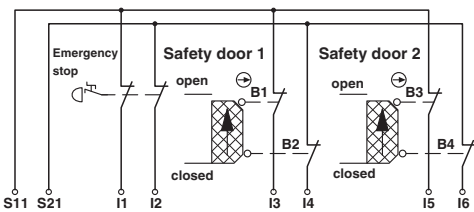


Safety relays - PSR-SCP- 24DC/MXF1/4X1/2X2/B - 2902725

Application drawing

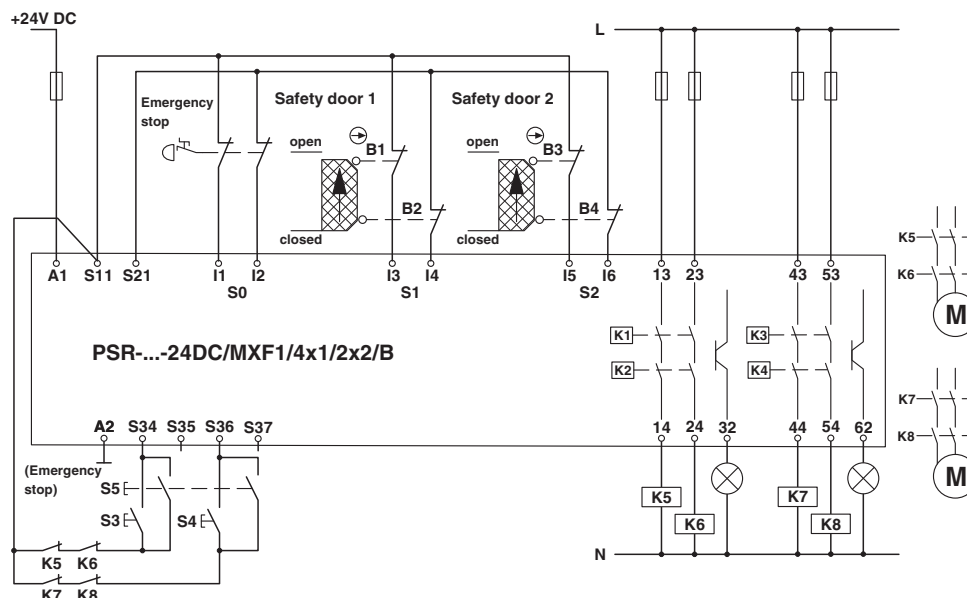

Circuit diagram

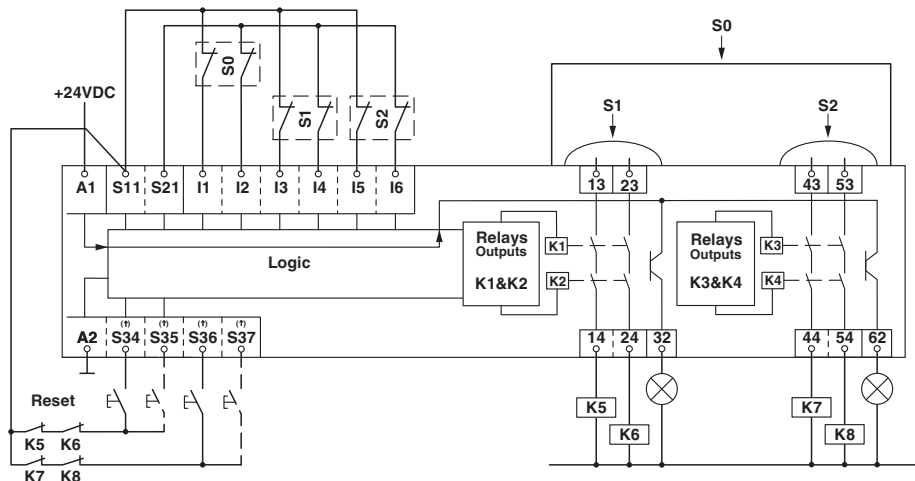

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27371102 |
| eCl@ss 4.1 | 27371102 |
| eCl@ss 5.0 | 27371901 |
| eCl@ss 5.1 | 27371901 |
| eCl@ss 6.0 | 27371819 |

Safety relays - PSR-SCP- 24DC/MXF1/4X1/2X2/B - 2902725

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 7.0 | 27371819 |
| eCl@ss 8.0 | 27371819 |
| eCl@ss 9.0 | 27371819 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC001449 |
| ETIM 4.0 | EC001449 |
| ETIM 5.0 | EC001449 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211901 |
| UNSPSC 7.0901 | 39121501 |
| UNSPSC 11 | 39121501 |
| UNSPSC 12.01 | 39121501 |
| UNSPSC 13.2 | 39121501 |

Approvals

Approvals

Approvals


Functional Safety / UL Listed / cUL Listed / EAC / cULus Listed

Ex Approvals

Approvals submitted

Approval details

| |
|-------------------|
| Functional Safety |
|-------------------|

| |
|---|
| UL Listed  |
|---|

Safety relays - PSR-SCP- 24DC/MXF1/4X1/2X2/B - 2902725

Approvals

cUL Listed 

EAC

cULus Listed 