

Plug - MACX MCR-I20 - 2905680

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Connection terminal block for current signals, +20 mA ... -20 mA, for safe switching of limit values, in combination with MACX ...-T-UI... temperature transducers.

RoHS

Key Commercial Data

Packing unit	1 STK
Weight per Piece (excluding packing)	39.600 g
Custom tariff number	85366990
Country of origin	Germany

Technical data

General

Conformance/Approvals	CE-compliant
-----------------------	--------------

Connection data

Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	14
Screw thread	M3
Connection method	Screw connection

Ambient conditions

Ambient temperature (operation)	-20 °C ... 65 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Altitude	≤ 2000 m

Plug - MACX MCR-I20 - 2905680

Technical data


Ambient conditions

Permissible humidity (operation)	typ. 5 % ... 95 % (non-condensing)
----------------------------------	------------------------------------

Standards and Regulations

Conformance	CE-compliant
-------------	--------------

Drawings

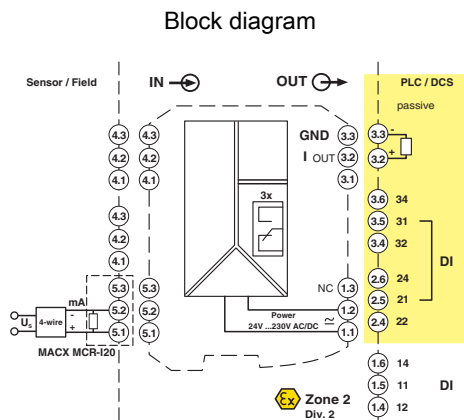

Classifications

eCl@ss

eCl@ss 5.1	27210121
eCl@ss 6.0	27210121
eCl@ss 8.0	27379202
eCl@ss 9.0	27379202

ETIM

ETIM 5.0	EC002027
----------	----------

Approvals

Approvals

Approvals

EAC

Ex Approvals

Plug - MACX MCR-I20 - 2905680

Approvals

Approval details

EAC EAC-Zulassung
