

Power cable - SAC-4P-MST/ 5,0-PUR/FST SCO - 1408810

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Power cable, 4-position, PUR halogen-free, black-gray RAL 7021, Plug straight M12 SPEEDCON, T-coded, on Socket straight M12 SPEEDCON, T-coded, Cable length: 5 m, for direct current up to 12 A/60 V

Why buy this product

- ✓ Easy and safe: 100% electrically tested plug-in components
- ✓ High-performance: DC connectors for up to 12 A and 60 V DC
- ✓ Protection against incorrect connection using special T-coding
- ✓ Save time, thanks to installation with SPEEDCON fast locking system
- ✓ Our standard: robust halogen-free PUR cable



Key Commercial Data

| | |
|--------------------------------------|-----------|
| Packing unit | 1 STK |
| Weight per Piece (excluding packing) | 560.000 g |
| Custom tariff number | 85444290 |
| Country of origin | Germany |

Technical data

Environmental Product Compliance

| | |
|------------|----------------|
| REACH SVHC | DOT 15571-58-1 |
|------------|----------------|

Dimensions

| | |
|-----------------|-----|
| Length of cable | 5 m |
|-----------------|-----|

Ambient conditions

| | |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 85 °C (Plug / socket) |
| Degree of protection | IP65 |
| | IP67 |

Power cable - SAC-4P-MST/ 5,0-PUR/FST SCO - 1408810

Technical data

General

| | |
|------------------------------|---------|
| Rated current at 40°C | 12 A |
| Rated voltage | 60 V |
| Number of positions | 4 |
| Insulation resistance | ≥ 10 GΩ |
| Coding | T power |
| Status display | No |
| Protective circuit/component | Unwired |
| Overvoltage category | III |
| Degree of pollution | 3 |
| Insertion/withdrawal cycles | > 100 |

Material

| | |
|--|---|
| Flammability rating according to UL 94 | V0 |
| Contact material | CuZn |
| Contact surface material | Au |
| Contact carrier material | PA |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Material, knurls | Zinc die-cast, nickel-plated |

Standards and Regulations

| | |
|--|----|
| Flammability rating according to UL 94 | V0 |
|--|----|

Cable

| | |
|--|----------------------------|
| Cable type | PUR halogen-free black |
| Cable type (abbreviation) | PUR |
| Cable abbreviation | Li9YV1-11Y |
| UL AWM style | 20233 / 10493 (80°C/300 V) |
| Conductor cross section | 4x 1.5 mm ² |
| AWG power supply | 16 |
| Conductor structure, voltage supply | 78x 0.15 mm |
| Core diameter including insulation | 2.35 mm ±0.05 mm |
| Thickness, insulation | ≥ 0.25 mm |
| Wire colors | brown, white, blue, black |
| Overall twist | 4 wires, twisted |
| Length of twist, overall twist | 90 mm |
| External sheath, color | black-gray RAL 7021 |
| Outer sheath thickness | approx. 1.3 mm |
| External cable diameter D | 8.4 mm ±0.25 mm |
| Minimum bending radius, fixed installation | 5 x D |

Power cable - SAC-4P-MST/ 5,0-PUR/FST SCO - 1408810


Technical data

Cable

| | |
|---|---|
| Minimum bending radius, flexible installation | 10 x D |
| Number of bending cycles | 4000000 |
| Minimum bending radius, drag chain applications | 10 x D |
| Traversing path | 10 m |
| Traversing rate | 3 m/s |
| Acceleration | 10 m/s ² |
| Cable weight | 109 kg/km |
| Outer sheath, material | PUR |
| Material conductor insulation | PP |
| Conductor material | Bare Cu litz wires |
| Insulation resistance | ≥ 1 GΩ*km (at 20 °C) |
| Conductor resistance | ≤ 13 Ω/km (at 20 °C) |
| Nominal voltage, cable | ≤ 300 V AC |
| Test voltage, cable | ≥ 3000 V AC (Spark test) |
| Flame resistance | According to UL 758/1581 (Cable Flame) |
| | According to UL 758/1581 FT1 |
| | According to DIN EN 60332-1-2 |
| Halogen-free | in accordance with DIN VDE 0472 part 815 |
| | in accordance with DIN EN 50267-2-1 |
| Resistance to oil | According to DIN EN 60811-2-1, 168 h at 100°C |
| | According to UL 758, 168 h at 60°C |
| Other resistance | Hydrolysis and microbe resistant as per VDE 0282 section 10 |
| | Low adhesion |
| | abrasion-resistant |
| | Resistant to salt water |
| Ambient temperature (operation) | -50 °C ... 80 °C (cable, fixed installation) |
| | -30 °C ... 80 °C (cable, flexible installation) |


Drawings

Schematic diagram



Pin assignment for M12 plug, 4-pos., T-coded, view of plug side


Schematic diagram




Pin assignment of M12 socket, 4-pos., T-coded, socket side view

Power cable - SAC-4P-MST/ 5,0-PUR/FST SCO - 1408810

Cable cross section




Dimensional drawing

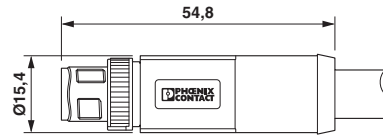

PUR halogen-free black [PUR]


M12 x 1 plug, straight

Dimensional drawing

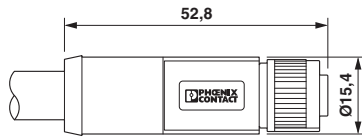

M12 x 1 socket, straight

Circuit diagram

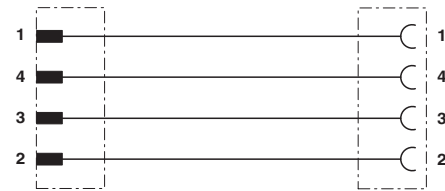

Contact assignment of the M12 connector and the M12 socket

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27140815 |
| eCl@ss 4.1 | 27140815 |
| eCl@ss 5.0 | 27143423 |
| eCl@ss 5.1 | 27061801 |
| eCl@ss 6.0 | 27279218 |
| eCl@ss 7.0 | 27279218 |
| eCl@ss 8.0 | 27279218 |
| eCl@ss 9.0 | 27060311 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC002061 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |

UNSPSC

| | |
|-------------|----------|
| UNSPSC 6.01 | 31251501 |
|-------------|----------|

Power cable - SAC-4P-MST/ 5,0-PUR/FST SCO - 1408810

Classifications

UNSPSC

| | |
|---------------|----------|
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11 | 31251501 |
| UNSPSC 12.01 | 31251501 |
| UNSPSC 13.2 | 31251501 |

Approvals


Approvals


Approvals


UL Listed / cUL Listed / cULus Listed

Ex Approvals

Approval details

| | |
|---|------|
| UL Listed  http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm FILE E 468743 | |
| mm ² /AWG/kcmil | 16 |
| Nominal current I _N | 12 A |
| Nominal voltage U _N | 63 V |

| | |
|--|------|
| cUL Listed  http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm FILE E 468743 | |
| mm ² /AWG/kcmil | 16 |
| Nominal current I _N | 12 A |
| Nominal voltage U _N | 63 V |

| | |
|--|--|
| cULus Listed  | |
|--|--|

