

Housing - HC-B 48-TFL-96/O1STM32G - 1647349

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON sleeve housing B48, for single locking latch, height 96 mm, with thread 1x M32, straight conductor exit

RoHS

Key Commercial Data

| | |
|--------------------------------------|-----------|
| Packing unit | 1 STK |
| Weight per Piece (excluding packing) | 700.000 g |
| Custom tariff number | 85389099 |
| Country of origin | Germany |

Technical data

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Dimensions

| | |
|--------|----------|
| Height | 96 mm |
| Width | 89 mm |
| Length | 131.5 mm |

Ambient conditions

| | |
|--------------------------------------|-------------------|
| Degree of protection of housing (IP) | IP65 |
| Ambient temperature (operation) | -40 °C ... 125 °C |

General

| | |
|--------------|--------------------------------------|
| Note | For contact inserts HC-B48, DD216, M |
| Size | B48 |
| Housing type | Sleeve housing |

Housing - HC-B 48-TFL-96/O1STM32G - 1647349


Technical data

General

| | |
|------------------------------|--------------------------|
| Locking type | for single locking latch |
| No. of cable outlets | 1 |
| Cable exit | straight |
| Screw connection | none |
| Type of the screw connection | 1x M32 |
| Housing material | Aluminum die-cast |
| Housing surface material | Powder-coated, gray |

Drawings

Dimensional drawing

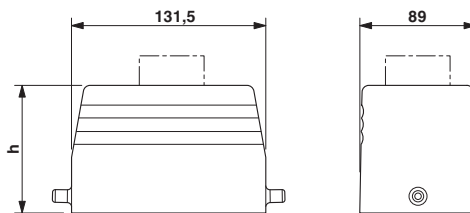

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27140816 |
| eCl@ss 4.1 | 27140816 |
| eCl@ss 5.0 | 27143424 |
| eCl@ss 5.1 | 27143424 |
| eCl@ss 6.0 | 27143424 |
| eCl@ss 7.0 | 27440209 |
| eCl@ss 8.0 | 27440202 |
| eCl@ss 9.0 | 27440202 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC000437 |
| ETIM 4.0 | EC000437 |
| ETIM 5.0 | EC000437 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 31261502 |
| UNSPSC 7.0901 | 31261502 |

Housing - HC-B 48-TFL-96/O1STM32G - 1647349

Classifications

UNSPSC

| | |
|--------------|----------|
| UNSPSC 11 | 31261502 |
| UNSPSC 12.01 | 31261502 |
| UNSPSC 13.2 | 31261502 |

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

| |
|-------------------------|
| EAC 7500651.22.01.00246 |
|-------------------------|

Accessories

Accessories

Extension adapter

Extension adapter - ENLAR-M-KV-M32/M40 - 1647682



Step-up adapter, M32 to M40, including O-ring

Full screw connection

Cable gland - G-INS-M32-M68N-PNES-GY - 1411127



Cable gland, Cable gland material: Polyamide 6, External cable diameter 15 mm ... 21 mm, Shielding: No, Connecting thread: M32, Color: silver-gray RAL 7001

Housing - HC-B 48-TFL-96/O1STM32G - 1647349

Accessories

Cable gland - G-INS-M32-M68N-PNES-BK - 1411136



Cable gland, Cable gland material: Polyamide 6, External cable diameter 15 mm ... 21 mm, Shielding: No, Connecting thread: M32, Color: jet black RAL 9005

Cable gland - G-INS-M32-M68N-NNES-S - 1411166



Cable gland, Cable gland material: Brass, nickel-plated, External cable diameter 15 mm ... 21 mm, Shielding: No, Connecting thread: M32, Color: silver

Cable gland - HC-M-KV-M32(19-27) - 1646010



Metal screw connection up to 5 bar, thread length: 8 mm, cable diameter: 19 - 27 mm, WAF 43, screw connection: M32

Cable gland - G-INSEC-M32-M68N-NCRS-S - 1411191



Cable gland, Cable gland material: Brass, nickel-plated, External cable diameter 14 mm ... 21 mm, Shielding: yes, Connecting thread: M32, Color: silver

Cable gland - HC-M-KV-Z-M32 - 1646162



Metal screw connection with strain relief clamp, thread length: 8 mm, cable sealing area: 18 - 27 mm, clamping area: 19 - 30 mm, SW 40, screw connection: M32

Housing - HC-B 48-TFL-96/O1STM32G - 1647349

Accessories

Cable gland - HC-M-KV-T-M32 - 1646201



Metal screw connection with cable bend protection and strain relief, thread length: 8 mm, cable sealing area: 18 - 27 mm, clamping area: 20 - 30 mm, SW 40, screw connection: M32

Plug for cable screw gland

Filler plugs - HC-M-BS-M32 - 1645862



Filler plug, metal, size: M32

Reducing adapter

Reducing adapter - REDUC-M-KV-M32/M25 - 1647637



Reducing adapter, metal, M32 to M25, including O-ring