

## High-current terminal block - UKH 240-3L - 3076358

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



High-current terminal block, Connection method: Screw connection, Number of positions: 3, Cross section: 70 mm<sup>2</sup> - 240 mm<sup>2</sup>, AWG: 2/0 - 500 kcmil, Width: 108 mm, Height: 123.6 mm, Color: gray, Mounting type: NS 35/15, NS 32

The figure shows UKH 150-3L

### Why buy this product

- Reliable cable connection is ensured by three-point centering of the conductor in the prismatic sleeve base
- Low contact resistance of the contact surface due to ribbing
- Screw locking by means of spring-loaded elements in the clamping part

### Key Commercial Data

|                                      |   |
|--------------------------------------|---|
| Packing unit                         | 1 STK   |
| Minimum order quantity               | 3 STK   |
| GTIN                                 | <br>4 046356 653732 |
| GTIN                                 | 4046356653732   |
| Weight per Piece (excluding packing) | 1,466.670 g   |
| Custom tariff number                 | 85369010  |
| Country of origin                    | Poland  |

### Technical data

#### General

|                       |                     |
|-----------------------|---------------------|
| Number of positions   | 3                   |
| Number of levels      | 1                   |
| Number of connections | 6                   |
| Potentials            | 3                   |
| Nominal cross section | 240 mm <sup>2</sup> |

# High-current terminal block - UKH 240-3L - 3076358

## Technical data

### General

|   |  |
|---|--|
| Color   | gray   |
| Insulating material   | PA   |
| Flammability rating according to UL 94                                  | V0   |
| Rated surge voltage   | 8 kV   |
| Degree of pollution   | 3  |
| Overvoltage category  | III  |
| Insulating material group   | I  |
| Maximum load current  | 415 A (At 240 mm <sup>2</sup> conductor cross section) |
| Nominal current I <sub>N</sub>  | 415 A  |
| Nominal voltage U <sub>N</sub>  | 1000 V   |
| Open side panel   | No   |
| Relative insulation material temperature index (Elec., UL 746 B)        | 130 °C   |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 130 °C   |
| Static insulating material application in cold                          | -60 °C   |
| Behavior in fire for rail vehicles (DIN 5510-2)                         | Test passed  |
| Flame test method (DIN EN 60695-11-10)                                  | V0   |
| Oxygen index (DIN EN ISO 4589-2)  | >32 %  |
| NF F16-101, NF F10-102 Class I  | 2  |
| NF F16-101, NF F10-102 Class F  | 2  |
| Surface flammability NFPA 130 (ASTM E 162)                              | passed   |
| Specific optical density of smoke NFPA 130 (ASTM E 662)                 | passed   |
| Smoke gas toxicity NFPA 130 (SMP 800C)                                  | passed   |
| Calorimetric heat release NFPA 130 (ASTM E 1354)                        | 28 MJ/kg   |
| Fire protection for rail vehicles (DIN EN 45545-2) R22                  | HL 1 - HL 3  |
| Fire protection for rail vehicles (DIN EN 45545-2) R23                  | HL 1 - HL 3  |
| Fire protection for rail vehicles (DIN EN 45545-2) R24                  | HL 1 - HL 3  |
| Fire protection for rail vehicles (DIN EN 45545-2) R26                  | HL 1 - HL 3  |

### Dimensions

|                 |          |
|-----------------|----------|
| Width           | 108 mm   |
| Length          | 100 mm   |
| Height          | 123.6 mm |
| Height NS 35/15 | 131.5 mm |
| Height NS 32    | 129 mm   |

### Connection data

|                   |                              |
|-------------------|------------------------------|
| Note              | Screws with hexagonal socket |
| Connection method | Screw connection             |

# High-current terminal block - UKH 240-3L - 3076358

## Technical data

### Connection data

|   |  |
|---|--|
| Connection in acc. with standard  | IEC 60947-7-1  |
| Note  | Note: Product releases, connection cross sections and notes on connecting aluminum cables can be found in the download area. |
| Conductor cross section solid min.  | 70 mm <sup>2</sup>   |
| Conductor cross section solid max.  | 240 mm <sup>2</sup>  |
| Conductor cross section AWG min.  | 2/0  |
| Conductor cross section AWG max.  | 500 kcmil  |
| Conductor cross section flexible min.   | 70 mm <sup>2</sup>   |
| Conductor cross section flexible max.   | 240 mm <sup>2</sup>  |
| Min. AWG conductor cross section, flexible  | 2/0  |
| Max. AWG conductor cross section, flexible  | 500 kcmil  |
| Conductor cross section flexible, with ferrule without plastic sleeve min.            | 70 mm <sup>2</sup>   |
| Conductor cross section flexible, with ferrule without plastic sleeve max.            | 185 mm <sup>2</sup>  |
| Conductor cross section flexible, with ferrule with plastic sleeve min.               | 70 mm <sup>2</sup>   |
| Conductor cross section flexible, with ferrule with plastic sleeve max.               | 185 mm <sup>2</sup>  |
| Cross section with insertion bridge, solid max.                                       | 240 mm <sup>2</sup>  |
| Cross section with insertion bridge, stranded max.                                    | 185 mm <sup>2</sup>  |
| 2 conductors with same cross section, solid min.                                      | 35 mm <sup>2</sup>   |
| 2 conductors with same cross section, solid max.                                      | 95 mm <sup>2</sup>   |
| 2 conductors with same cross section, stranded min.                                   | 50 mm <sup>2</sup>   |
| 2 conductors with same cross section, stranded max.                                   | 95 mm <sup>2</sup>   |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, min. | 35 mm <sup>2</sup>   |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, max. | 50 mm <sup>2</sup>   |
| Cross section with insertion bridge, solid max.                                       | 240 mm <sup>2</sup>  |
| Cross section with insertion bridge, stranded max.                                    | 185 mm <sup>2</sup>  |
| Stripping length  | 40 mm  |
| Internal cylindrical gage   | B15  |
| Screw thread  | M10  |
| Tightening torque, min  | 25 Nm  |
| Tightening torque max   | 30 Nm  |

### Standards and Regulations

|  |               |
|--|---------------|
| Connection in acc. with standard       | UL            |
|  | IEC 60947-7-1 |
| Flammability rating according to UL 94 | V0            |

### Environmental Product Compliance

# High-current terminal block - UKH 240-3L - 3076358

## Technical data

### Environmental Product Compliance


|            |   |
|------------|---|
| China RoHS | Environmentally Friendly Use Period = 50  |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

## Drawings


Circuit diagram



Dimensional drawing



Schematic diagram

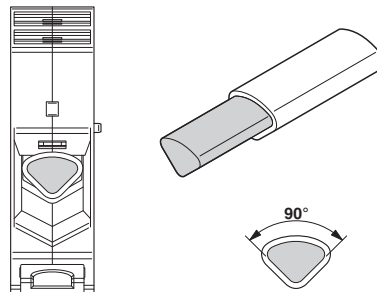

Connecting aluminum cables. Further notes can be found in the download area

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27141120 |
| eCl@ss 4.1 | 27141120 |
| eCl@ss 5.0 | 27141120 |
| eCl@ss 5.1 | 27141120 |
| eCl@ss 6.0 | 27141120 |
| eCl@ss 7.0 | 27141120 |
| eCl@ss 8.0 | 27141120 |
| eCl@ss 9.0 | 27141120 |

# High-current terminal block - UKH 240-3L - 3076358

## Classifications

### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC000897 |
| ETIM 4.0 | EC000897 |
| ETIM 5.0 | EC000897 |
| ETIM 6.0 | EC000897 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211811 |
| UNSPSC 7.0901 | 39121410 |
| UNSPSC 11     | 39121410 |
| UNSPSC 12.01  | 39121410 |
| UNSPSC 13.2   | 39121410 |

## Approvals

### Approvals

---

#### Approvals


UL Recognized / EAC

---

#### Ex Approvals

---

### Approval details

|                                |   |   |              |
|--------------------------------|---|---|--------------|
| UL Recognized                  |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 60425 |
|                                | B   | C   |              |
| mm <sup>2</sup> /AWG/kcmil     | 2/0-500   | 2/0-500   |              |
| Nominal current I <sub>N</sub> | 380 A   | 380 A   |              |
| Nominal voltage U <sub>N</sub> | 600 V   | 600 V   |              |

|     |   |                     |
|-----|---|---------------------|
| EAC |  | 7500651.22.01.00246 |
|-----|---|---------------------|

## High-current terminal block - UKH 240-3L - 3076358

### Accessories

#### Accessories

#### DIN rail

DIN rail perforated - NS 32 PERF 2000MM - 1201002



G-profile DIN rail, material: Steel, perforated, height 15 mm, width 32 mm, length 2 m

---

DIN rail, unperforated - NS 32 UNPERF 2000MM - 1201015



G-profile DIN rail, material: Steel, unperforated, height 15 mm, width 32 mm, length 2 m

---

DIN rail perforated - NS 35/15 PERF 2000MM - 1201730



DIN rail, material: steel galvanized and passivated with a thick layer, perforated, height 15 mm, width 35 mm, length: 2000 mm

---

DIN rail, unperforated - NS 35/15 UNPERF 2000MM - 1201714



DIN rail, material: Steel, unperforated, height 15 mm, width 35 mm, length: 2 m

---

DIN rail perforated - NS 35/15 WH PERF 2000MM - 0806602



DIN rail 35 mm (NS 35)

## High-current terminal block - UKH 240-3L - 3076358

### Accessories

---

DIN rail - NS 35/15 WH UNPERF 2000MM - 1204135



DIN rail 35 mm (NS 35)

---

DIN rail, unperforated - NS 35/15 AL UNPERF 2000MM - 1201756



DIN rail, deep drawn, high profile, unperforated, 1.5 mm thick, material: aluminum, height 15 mm, width 35 mm, length 2000 mm

---

DIN rail perforated - NS 35/15 ZN PERF 2000MM - 1206599



DIN rail, material: Galvanized, perforated, height 15 mm, width 35 mm, length: 2 m

---

DIN rail, unperforated - NS 35/15 ZN UNPERF 2000MM - 1206586



DIN rail, material: Galvanized, unperforated, height 15 mm, width 35 mm, length: 2 m

---

DIN rail, unperforated - NS 35/15 CU UNPERF 2000MM - 1201895



DIN rail, material: Copper, unperforated, 1.5 mm thick, height 15 mm, width 35 mm, length: 2 m

---

## High-current terminal block - UKH 240-3L - 3076358

### Accessories

End cap - NS 35/15 CAP - 1206573



DIN rail end piece, for DIN rail NS 35/15

---

### End block

End clamp - E/AL-NS 32 - 1201659



End clamp, for end support of UKH 50 - UKH 240, is pushed onto DIN rail NS 32 and fixed with 2 screws, width: 10 mm, color: Aluminum

End clamp - E/AL-NS 35 - 1201662



End clamp, for end support of UKH 50 to UKH 240, is pushed onto DIN rail NS 35 and fixed with 2 screws, width: 10 mm, color: aluminum

---

### Insertion bridge

Insertion bridge - EB 3-36/UKH - 0201414



Insertion bridge, Pitch: 36 mm, Number of positions: 3, Color: gray

Insertion bridge - EB 2-36/UKH - 0201401



Insertion bridge, Pitch: 36 mm, Number of positions: 2, Color: gray



## High-current terminal block - UKH 240-3L - 3076358

### Accessories

---

#### Labeled terminal marker

Warning label - WS-2K - 1004513



Adhesive warning plate, self-adhesive, black print: lightning flash with mixed version - "Vorsicht Spannung - Attention Danger" size of label: 32 x 26 mm

---

Zack marker strip - ZB 22 CUS - 0824949



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, Mounting type: Snap into tall marker groove, for terminal block width: 22 mm, Lettering field: 10.5 x 21.8 mm

---

Marker for terminal blocks - ZB 22,LGS:L1-N,PE - 0811875



Marker for terminal blocks. Strip, white, labeled, Printed horizontally: L1, L2, L3, N, PE, Mounting type: Snap into tall marker groove, for terminal block width: 22 mm, Lettering field: 10.5 x 21.8 mm

---

#### Mounting material

Insertion profile - UKH 150/240 EP - 3009244



Insertion profile, Color: silver

---

#### Pick-off terminal block

## High-current terminal block - UKH 240-3L - 3076358

### Accessories

Pick-off terminal block - AGK 10-UKH 150/240 - 3003554



Pick-off terminal block, Connection method: Screw connection, Cross section: 0.5 mm<sup>2</sup> - 10 mm<sup>2</sup>, AWG: 20 - 8, Width: 10.2 mm, Height: 34.7 mm, Color: gray, Mounting type: On base element

---

### Terminal marking

Zack marker strip - ZB 22:UNBEDRUCKT - 0811862



Zack marker strip, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, Mounting type: Snap into tall marker groove, for terminal block width: 22 mm, Lettering field: 10.5 x 21.8 mm