

## COMBI receptacle - SC 2,5/ 9 - 3041383

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



COMBI receptacle, Connection method: Plug connection, Number of positions: 9, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 46.8 mm, Height: 18.8 mm, Color: gray

The figure shows a 5-pos. version of the product

### Why buy this product

- Standard strain relief can be used
- Tested for railway applications

### Key Commercial Data

Packing unit	1 STK
GTIN	 4 017918 922689
GTIN	4017918922689
Weight per Piece (excluding packing)	24.510 g
Custom tariff number	85366990
Country of origin	Poland

### Technical data

#### General

Number of positions	9
Number of levels	1
Number of connections	1
Nominal cross section	2.5 mm <sup>2</sup>
Color	gray
Insulating material	PA

# COMBI receptacle - SC 2,5/ 9 - 3041383

## Technical data

### General

Flammability rating according to UL 94	V0
Area of application	Railway industry
	Machine building
	Plant engineering
Maximum load current	24 A (with a 2.5 mm <sup>2</sup> conductor cross section)
Rated surge voltage	6 kV
Degree of pollution	3
Overvoltage category	III
Insulating material group	I
Maximum load current	24 A (with 4 mm <sup>2</sup> conductor cross section)
Nominal current I <sub>N</sub>	24 A
Nominal voltage U <sub>N</sub>	500 V
Open side panel	Yes
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Static insulating material application in cold	-60 °C
Behavior in fire for rail vehicles (DIN 5510-2)	Test passed
Flame test method (DIN EN 60695-11-10)	V0
Oxygen index (DIN EN ISO 4589-2)	>32 %
NF F16-101, NF F10-102 Class I	2
NF F16-101, NF F10-102 Class F	2
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3

### Dimensions

Width	46.8 mm
End cover width	2.2 mm
Length	37.2 mm
Height	18.8 mm
Pitch	5.2 mm

### Connection data

# COMBI receptacle - SC 2,5/ 9 - 3041383

## Technical data

### Connection data

Connection method	Plug connection
Connection in acc. with standard	IEC 61984
Conductor cross section solid min.	0.08 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section AWG min.	28
Conductor cross section AWG max.	12
Conductor cross section flexible min.	0.08 mm <sup>2</sup>
Conductor cross section flexible max.	2.5 mm <sup>2</sup>
Min. AWG conductor cross section, flexible	28
Max. AWG conductor cross section, flexible	14
Conductor cross section flexible, with ferrule without plastic sleeve min.	0.14 mm <sup>2</sup>
Conductor cross section flexible, with ferrule without plastic sleeve max.	2.5 mm <sup>2</sup>
Conductor cross section flexible, with ferrule with plastic sleeve min.	0.14 mm <sup>2</sup>
Conductor cross section flexible, with ferrule with plastic sleeve max.	2.5 mm <sup>2</sup>
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max.	0.5 mm <sup>2</sup>
Stripping length	8 mm ... 10 mm
Internal cylindrical gage	A3

### Standards and Regulations

Connection in acc. with standard	CUL
	IEC 61984
Flammability rating according to UL 94	V0

### Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

## Drawings

### Circuit diagram



### Diagram

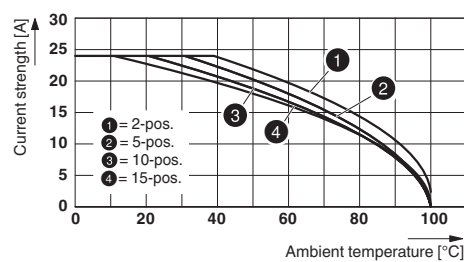

# COMBI receptacle - SC 2,5/ 9 - 3041383

## Classifications

### eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27141120
eCl@ss 7.0	27141120
eCl@ss 8.0	27141151
eCl@ss 9.0	27141151

### ETIM

ETIM 2.0	EC000897
ETIM 3.0	EC000897
ETIM 4.0	EC000897
ETIM 5.0	EC002021
ETIM 6.0	EC002021

### UNSPSC

UNSPSC 6.01	30211802
UNSPSC 7.0901	39121402
UNSPSC 11	39121402
UNSPSC 12.01	39121402
UNSPSC 13.2	39121402

## Approvals

### Approvals

---

#### Approvals

UL Recognized / cUL Recognized / LR / BV / RS / EAC / DNV GL / DNV GL / cULus Recognized

---


#### Ex Approvals


---


### Approval details

# COMBI receptacle - SC 2,5/ 9 - 3041383

## Approvals

UL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 60425
	B	C	
mm <sup>2</sup> /AWG/kcmil	26-12	26-12	
Nominal current IN	20 A	20 A	
Nominal voltage UN	300 V	300 V	

cUL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 60425
	B	C	
mm <sup>2</sup> /AWG/kcmil	26-12	26-12	
Nominal current IN	20 A	20 A	
Nominal voltage UN	300 V	300 V	

LR		<a href="http://www.lr.org/en">http://www.lr.org/en</a>	05/20042
----	---	---	----------


BV		<a href="http://www.veristar.com/portal/veristarinfo/generalinfo/approved/approvedProducts/equipmentAndMaterials">http://www.veristar.com/portal/veristarinfo/generalinfo/approved/approvedProducts/equipmentAndMaterials</a>	27721/A0 BV
----	---	---	-------------

RS		<a href="http://www.rs-head.spb.ru/en/index.php">http://www.rs-head.spb.ru/en/index.php</a>	11.04057.250
----	---	---	--------------

EAC			7500651.22.01.00246
-----	---	--	---------------------

DNV GL		<a href="https://www.dnvgl.com/">https://www.dnvgl.com/</a>	E-13345 (E-9232)
--------	--	---	------------------

DNV GL		<a href="http://exchange.dnv.com/tari/">http://exchange.dnv.com/tari/</a>	TAE00001CS
--------	--	---	------------

cULus Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	
------------------	---	---	--

## COMBI receptacle - SC 2,5/ 9 - 3041383

### Accessories

#### Accessories

##### End cover

End cover - D-SC 2,5 - 3042243



End cover, Length: 18.8 mm, Width: 2.2 mm, Height: 37.2 mm, Color: gray

---

##### Insulating sleeve

Insulating sleeve - MPS-IH WH - 0201663



Insulating sleeve, Color: white

---

Insulating sleeve - MPS-IH RD - 0201676



Insulating sleeve, Color: red

---

Insulating sleeve - MPS-IH BU - 0201689



Insulating sleeve, Color: blue

---

## COMBI receptacle - SC 2,5/ 9 - 3041383

### Accessories

Insulating sleeve - MPS-IH YE - 0201692



Insulating sleeve, Color: yellow

---

Insulating sleeve - MPS-IH GN - 0201702



Insulating sleeve, Color: green

---

Insulating sleeve - MPS-IH GY - 0201728



Insulating sleeve, Color: gray

---

Insulating sleeve - MPS-IH BK - 0201731



Insulating sleeve, Color: black

---

Insulating sleeve - ISH 2,5/0,2 - 3002843



Insulating sleeve, Color: white

---

## COMBI receptacle - SC 2,5/ 9 - 3041383

### Accessories

Insulating sleeve - ISH 2,5/0,5 - 3002856



Insulating sleeve, Color: gray

---

Insulating sleeve - ISH 2,5/1,0 - 3002869



Insulating sleeve, Color: black

---

### Labeled terminal marker

Zack Marker strip, flat - ZBF 5 CUS - 0825025



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, Mounting type: Snap into flat marker groove, for terminal block width: 5 mm, Lettering field: 5.15 x 5.15 mm

---

Zack Marker strip, flat - ZBF 5,LGS:FORTL.ZAHLEN - 0808671



Zack Marker strip, flat, Strip, white, labeled, Printed horizontally: Consecutive numbers 1 - 10, 11 - 20, etc. up to 491 - 500, Mounting type: Snap into flat marker groove, for terminal block width: 5 mm, Lettering field: 5.15 x 5.15 mm

---

Zack Marker strip, flat - ZBF 5,QR:FORTL.ZAHLEN - 0808697



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: Consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - 100, Mounting type: Snap into flat marker groove, for terminal block width: 5 mm, Lettering field: 5.15 x 5.15 mm

---



## COMBI receptacle - SC 2,5/ 9 - 3041383

### Accessories

Zack Marker strip, flat - ZBF 5,LGS:GERADE ZAHLEN - 0810821



Zack Marker strip, flat, Strip, white, labeled, Printed horizontally: Consecutive numbers 2 - 20, 22 - 40, etc. up to 82 - 100, Mounting type: Snap into flat marker groove, for terminal block width: 5 mm, Lettering field: 5.15 x 5.15 mm

---

Zack Marker strip, flat - ZBF 5,LGS:UNGERADE ZAHLEN - 0810863



Zack Marker strip, flat, Strip, white, labeled, Printed horizontally: Odd numbers 1 - 19, 21 - 39, etc. up to 81 - 99, Mounting type: Snap into flat marker groove, for terminal block width: 5 mm, Lettering field: 5.15 x 5.15 mm

---

Marker for terminal blocks - UC-TMF 5 CUS - 0824638



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, Mounting type: Snap into flat marker groove, for terminal block width: 5.2 mm, Lettering field: 4.6 x 5.1 mm

---

Marker for terminal blocks - UCT-TMF 5 CUS - 0829658



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, Mounting type: Snap into flat marker groove, for terminal block width: 5.2 mm, Lettering field: 4.4 x 4.7 mm

---

Marker pen

Marker pen - B-STIFT - 1051993



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

---

## COMBI receptacle - SC 2,5/ 9 - 3041383

### Accessories

Marker pen - X-PEN 0,35 - 0811228



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm

---

### Mounting material

Panel feed-through - SSL 2,5 - 3043815



Panel feed-through, Width: 5.2 mm, Color: gray

---

Strain relief - PDZ/2 - 3040562



Strain relief, Length: 3 mm, Width: 9.6 mm, Height: 23 mm, Number of positions: 2, Color: black

---

Strain relief - PDZ/4 - 3040575



Strain relief, Length: 3 mm, Width: 19.9 mm, Height: 23 mm, Number of positions: 4, Color: black

---

### Partition plate

Spacer plate - DP PS-5 - 3036725



Spacer plate, Length: 22.4 mm, Width: 5.2 mm, Height: 29 mm, Number of positions: 1, Color: red

## COMBI receptacle - SC 2,5/ 9 - 3041383

### Accessories

---

#### Screwdriver tools

Screwdriver - SZF 1-0,6X3,5 - 1204517



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

---

#### Terminal marking

Zack Marker strip, flat - ZBF 5:UNBEDRUCKT - 0808642



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, Mounting type: Snap into flat marker groove, for terminal block width: 5 mm, Lettering field: 5.1 x 5.2 mm

---

Marker for terminal blocks - UC-TMF 5 - 0818153



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK CLED, BLUEMARK LED, CMS-P1-PLOTTER, PLOTMARK, Mounting type: Snap into flat marker groove, for terminal block width: 5.2 mm, Lettering field: 4.6 x 5.1 mm

---

Marker for terminal blocks - UCT-TMF 5 - 0828744



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: THERMOMARK PRIME, THERMOMARK CARD, BLUEMARK CLED, BLUEMARK LED, TOPMARK LASER, Mounting type: Snap into flat marker groove, for terminal block width: 5.2 mm, Lettering field: 4.4 x 4.7 mm

---

#### Test plug terminal block

## COMBI receptacle - SC 2,5/ 9 - 3041383

### Accessories

Test plugs - MPS-MT - 0201744



Test plugs, with solder connection up to 1 mm<sup>2</sup> conductor cross section, Color: silver

---

Test plugs - PS-5 - 3030983



Test plugs, Color: red

---

Test plugs - PS-5/2,3MM RD - 3038723



Test plugs, Color: red

---

### Additional products

Plug - SP 2,5/ 1 - 3040258



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: gray

---

Plug - SP 2,5/ 2 - 3040261



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 2, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 10.4 mm, Height: 39 mm, Color: gray

---

## COMBI receptacle - SC 2,5/ 9 - 3041383

### Accessories

#### Plug - SP 2,5/ 3 - 3040274



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 3, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 15.6 mm, Height: 39 mm, Color: gray

---

#### Plug - SP 2,5/ 4 - 3040287



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 4, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 20.8 mm, Height: 39 mm, Color: gray

---

#### Plug - SP 2,5/ 5 - 3040290



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 5, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 26 mm, Height: 39 mm, Color: gray

---

#### Plug - SP 2,5/ 6 - 3040300



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 6, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 31.2 mm, Height: 39 mm, Color: gray

---

#### Plug - SP 2,5/ 7 - 3040313



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 7, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 36.4 mm, Height: 39 mm, Color: gray

---

## COMBI receptacle - SC 2,5/ 9 - 3041383

### Accessories

#### Plug - SP 2,5/ 8 - 3040326



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 8, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 41.6 mm, Height: 39 mm, Color: gray

---

#### Plug - SP 2,5/ 9 - 3040339



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 9, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 46.8 mm, Height: 39 mm, Color: gray

---

#### Plug - SP 2,5/10 - 3040342



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 10, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 52 mm, Height: 39 mm, Color: gray

---

#### Plug - SP 2,5/11 - 3040355



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 11, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 57.2 mm, Height: 39 mm, Color: gray

---

#### Plug - SP 2,5/12 - 3040368



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 12, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 62.4 mm, Height: 39 mm, Color: gray

---

## COMBI receptacle - SC 2,5/ 9 - 3041383

### Accessories

#### Plug - SP 2,5/13 - 3040371



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 13, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 67.6 mm, Height: 39 mm, Color: gray

---

#### Plug - SP 2,5/14 - 3040384



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 14, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 72.8 mm, Height: 39 mm, Color: gray

---

#### Plug - SP 2,5/15 - 3040397



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 15, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 78 mm, Height: 39 mm, Color: gray

---

#### Plug - SP 2,5/ 1 BU - 3040698



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: blue

---

#### Plug - SP 2,5/ 1 GNYE - 3040708



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: green-yellow

---

## COMBI receptacle - SC 2,5/ 9 - 3041383

### Accessories

Plug - SPB 2,5/ 1 - 3040106



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: gray

---

Plug - SPB 2,5/ 2 - 3040119



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 2, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 10.4 mm, Height: 39 mm, Color: gray

---

Plug - SPB 2,5/ 3 - 3040122



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 3, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 15.6 mm, Height: 39 mm, Color: gray

---

Plug - SPB 2,5/ 4 - 3040135



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 4, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 20.8 mm, Height: 39 mm, Color: gray

---

Plug - SPB 2,5/ 5 - 3040143



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 5, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 26 mm, Height: 39 mm, Color: gray

---



## COMBI receptacle - SC 2,5/ 9 - 3041383

### Accessories

#### Plug - SPB 2,5/ 6 - 3040151



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 6, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 31.2 mm, Height: 39 mm, Color: gray

---

#### Plug - SPB 2,5/ 7 - 3040164



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 7, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 36.4 mm, Height: 39 mm, Color: gray

---

#### Plug - SPB 2,5/ 8 - 3040177



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 8, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 41.6 mm, Height: 39 mm, Color: gray

---

#### Plug - SPB 2,5/ 9 - 3040180



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 9, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 46.8 mm, Height: 39 mm, Color: gray

---

#### Plug - SPB 2,5/10 - 3040193



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 10, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 52 mm, Height: 39 mm, Color: gray

---

## COMBI receptacle - SC 2,5/ 9 - 3041383

### Accessories

#### Plug - SPB 2,5/11 - 3040203



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 11, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 57.2 mm, Height: 39 mm, Color: gray

---

#### Plug - SPB 2,5/12 - 3040216



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 12, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 62.4 mm, Height: 39 mm, Color: gray

---

#### Plug - SPB 2,5/13 - 3040229



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 13, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 67.6 mm, Height: 39 mm, Color: gray

---

#### Plug - SPB 2,5/14 - 3040232



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 14, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 72.8 mm, Height: 39 mm, Color: gray

---

#### Plug - SPB 2,5/15 - 3040245



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 15, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 78 mm, Height: 39 mm, Color: gray

---

## COMBI receptacle - SC 2,5/ 9 - 3041383

### Accessories

Plug - SPB 2,5/ 1 BU - 3040724



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: blue

---

Plug - SPB 2,5/ 1 GNYE - 3040711



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: green-yellow

---

Plug - SPDB 2,5/ 1 - 3040407



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: gray

---

Plug - SPDB 2,5/ 2 - 3040410



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 2, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 10.4 mm, Height: 39 mm, Color: gray

---

Plug - SPDB 2,5/ 3 - 3040423



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 3, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 15.6 mm, Height: 39 mm, Color: gray

---

## COMBI receptacle - SC 2,5/ 9 - 3041383

### Accessories

#### Plug - SPDB 2,5/ 4 - 3040436



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 4, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 20.8 mm, Height: 39 mm, Color: gray

---

#### Plug - SPDB 2,5/ 5 - 3040449



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 5, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 26 mm, Height: 39 mm, Color: gray

---

#### Plug - SPDB 2,5/ 6 - 3040452



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 6, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 31.2 mm, Height: 39 mm, Color: gray

---

#### Plug - SPDB 2,5/ 7 - 3040465



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 7, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 36.4 mm, Height: 39 mm, Color: gray

---

#### Plug - SPDB 2,5/ 8 - 3040478



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 8, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 41.6 mm, Height: 39 mm, Color: gray

---

## COMBI receptacle - SC 2,5/ 9 - 3041383

### Accessories

#### Plug - SPDB 2,5/ 9 - 3040481



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 9, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 46.8 mm, Height: 39 mm, Color: gray

---

#### Plug - SPDB 2,5/10 - 3040494



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 10, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 52 mm, Height: 39 mm, Color: gray

---

#### Plug - SPDB 2,5/11 - 3040504



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 11, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 57.2 mm, Height: 39 mm, Color: gray

---

#### Plug - SPDB 2,5/12 - 3040517



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 12, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 62.4 mm, Height: 39 mm, Color: gray

---

#### Plug - SPDB 2,5/13 - 3040520



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 13, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 67.6 mm, Height: 39 mm, Color: gray

---

## COMBI receptacle - SC 2,5/ 9 - 3041383

### Accessories

#### Plug - SPDB 2,5/14 - 3040533



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 14, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 72.8 mm, Height: 39 mm, Color: gray

---

#### Plug - SPDB 2,5/15 - 3040546



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 15, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 78 mm, Height: 39 mm, Color: gray

---

#### Plug - SPDB 2,5/ 1 BU - 3040737



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: blue

---

#### Plug - SPDB 2,5/ 1 GNYE - 3040740



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: green-yellow

---

#### Plug - SP-H 2,5/ 1 - 3210619



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: gray

---

## COMBI receptacle - SC 2,5/ 9 - 3041383

### Accessories

Plug - SP-H 2,5/ 2 - 3210622



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 2, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 10.4 mm, Height: 39 mm, Color: gray

---

Plug - SP-H 2,5/ 3 - 3210635



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 3, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 15.6 mm, Height: 39 mm, Color: gray

---

Plug - SP-H 2,5/ 4 - 3210648



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 4, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 20.8 mm, Height: 39 mm, Color: gray

---

Plug - SP-H 2,5/ 5 - 3210651



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 5, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 26 mm, Height: 39 mm, Color: gray

---

Plug - SP-H 2,5/ 6 - 3210664



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 6, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 31.2 mm, Height: 39 mm, Color: gray

---

## COMBI receptacle - SC 2,5/ 9 - 3041383

### Accessories

#### Plug - SP-H 2,5/ 7 - 3210677



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 7, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 36.4 mm, Height: 39 mm, Color: gray

---

#### Plug - SP-H 2,5/ 8 - 3210680



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 8, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 41.6 mm, Height: 39 mm, Color: gray

---

#### Plug - SP-H 2,5/ 9 - 3210693



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 9, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 46.8 mm, Height: 39 mm, Color: gray

---

#### Plug - SP-H 2,5/10 - 3210703



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 10, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 52 mm, Height: 39 mm, Color: gray

---

#### Plug - SP-H 2,5/11 - 3210716



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 11, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 57.2 mm, Height: 39 mm, Color: gray

---



## COMBI receptacle - SC 2,5/ 9 - 3041383

### Accessories

#### Plug - SP-H 2,5/12 - 3210729



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 12, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 62.4 mm, Height: 39 mm, Color: gray

---

#### Plug - SP-H 2,5/13 - 3210732



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 13, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 67.6 mm, Height: 39 mm, Color: gray

---

#### Plug - SP-H 2,5/14 - 3210745



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 14, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 72.8 mm, Height: 39 mm, Color: gray

---

#### Plug - SP-H 2,5/15 - 3210758



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 15, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 78 mm, Height: 39 mm, Color: gray

---

#### Plug - SP-H 2,5/ 1 BU - 3210761



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: blue

---

## COMBI receptacle - SC 2,5/ 9 - 3041383

### Accessories

Plug - SP-H 2,5/ 1 GNYE - 3210774



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: green-yellow

---

Plug - SP-H 2,5/ 1-L - 3210787



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: gray

---

Plug - SP-H 2,5/ 1-L BU - 3210790



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: blue

---

Plug - SP-H 2,5/ 1-L GNYE - 3210800



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: green-yellow

---

Plug - SP-H 2,5/ 1-M - 3210813



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: gray

---

## COMBI receptacle - SC 2,5/ 9 - 3041383

### Accessories

Plug - SP-H 2,5/ 1-M BU - 3210826



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: blue

---

Plug - SP-H 2,5/ 1-M GNYE - 3210839



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: green-yellow

---

Plug - SP-H 2,5/ 1-R - 3210842



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: gray

---

Plug - SP-H 2,5/ 1-R BU - 3210855



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: blue

---

Plug - SP-H 2,5/ 1-R GNYE - 3210868



Plug, Connection method: Spring-cage connection, Plug connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 39 mm, Color: green-yellow

---

## COMBI receptacle - SC 2,5/ 9 - 3041383

### Accessories

#### Plug - SPV 2,5/ 1 - 3041710



Plug, Connection method: Spring-cage connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 34 mm, Color: gray

---

#### Plug - SPV 2,5/ 2 - 3041723



Plug, Connection method: Spring-cage connection, Number of positions: 2, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 10.4 mm, Height: 34 mm, Color: gray

---

#### Plug - SPV 2,5/ 3 - 3041736



Plug, Connection method: Spring-cage connection, Number of positions: 3, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 15.6 mm, Height: 34 mm, Color: gray

---

#### Plug - SPV 2,5/ 4 - 3041749



Plug, Connection method: Spring-cage connection, Number of positions: 4, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 20.8 mm, Height: 34 mm, Color: gray

---

#### Plug - SPV 2,5/ 5 - 3041752



Plug, Connection method: Spring-cage connection, Number of positions: 5, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 26 mm, Height: 34 mm, Color: gray

---

## COMBI receptacle - SC 2,5/ 9 - 3041383

### Accessories

#### Plug - SPV 2,5/ 6 - 3041765



Plug, Connection method: Spring-cage connection, Number of positions: 6, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 31.2 mm, Height: 34 mm, Color: gray

---

#### Plug - SPV 2,5/ 7 - 3041778



Plug, Connection method: Spring-cage connection, Number of positions: 7, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 36.4 mm, Height: 34 mm, Color: gray

---

#### Plug - SPV 2,5/ 8 - 3041781



Plug, Connection method: Spring-cage connection, Number of positions: 8, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 41.6 mm, Height: 34 mm, Color: gray

---

#### Plug - SPV 2,5/ 9 - 3041794



Plug, Connection method: Spring-cage connection, Number of positions: 9, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 46.8 mm, Height: 34 mm, Color: gray

---

#### Plug - SPV 2,5/10 - 3041804



Plug, Connection method: Spring-cage connection, Number of positions: 10, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 52 mm, Height: 34 mm, Color: gray

---

## COMBI receptacle - SC 2,5/ 9 - 3041383

### Accessories

#### Plug - SPV 2,5/11 - 3041817



Plug, Connection method: Spring-cage connection, Number of positions: 11, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 57.2 mm, Height: 34 mm, Color: gray

---

#### Plug - SPV 2,5/12 - 3041820



Plug, Connection method: Spring-cage connection, Number of positions: 12, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 62.4 mm, Height: 34 mm, Color: gray

---

#### Plug - SPV 2,5/13 - 3041833



Plug, Connection method: Spring-cage connection, Number of positions: 13, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 67.6 mm, Height: 34 mm, Color: gray

---

#### Plug - SPV 2,5/14 - 3041846



Plug, Connection method: Spring-cage connection, Number of positions: 14, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 72.8 mm, Height: 34 mm, Color: gray

---

#### Plug - SPV 2,5/15 - 3041859



Plug, Connection method: Spring-cage connection, Number of positions: 15, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 78 mm, Height: 34 mm, Color: gray

---

## COMBI receptacle - SC 2,5/ 9 - 3041383

### Accessories

Plug - SPV 2,5/ 1 BU - 3061017



Plug, Connection method: Spring-cage connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 34 mm, Color: blue

---

Plug - SPV 2,5/ 1 GNYE - 3061020



Plug, Connection method: Spring-cage connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 34 mm, Color: green-yellow

---

Plug - SPV 2,5/ 1-L - 3041024



Plug, Connection method: Spring-cage connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 34 mm, Color: gray

---

Plug - SPV 2,5/ 1-L BU - 3041037



Plug, Connection method: Spring-cage connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 34 mm, Color: blue

---

Plug - SPV 2,5/ 1-L GNYE - 3041040



Plug, Connection method: Spring-cage connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 34 mm, Color: green-yellow

---

## COMBI receptacle - SC 2,5/ 9 - 3041383

### Accessories

#### Plug - SPV 2,5/ 1-M - 3041053



Plug, Connection method: Spring-cage connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 34 mm, Color: gray

---

#### Plug - SPV 2,5/ 1-M BU - 3041066



Plug, Connection method: Spring-cage connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 34 mm, Color: blue

---

#### Plug - SPV 2,5/ 1-M GNYE - 3041079



Plug, Connection method: Spring-cage connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 34 mm, Color: green-yellow

---

#### Plug - SPV 2,5/ 1-R - 3041082



Plug, Connection method: Spring-cage connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 34 mm, Color: gray

---

#### Plug - SPV 2,5/ 1-R BU - 3041095



Plug, Connection method: Spring-cage connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 34 mm, Color: blue

---



## COMBI receptacle - SC 2,5/ 9 - 3041383

### Accessories

Plug - SPV 2,5/ 1-R GNYE - 3041105



Plug, Connection method: Spring-cage connection, Number of positions: 1, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 28 - 12, Width: 5.2 mm, Height: 34 mm, Color: green-yellow