

## Protective covers - HC-B06-HCLWS-PLR-BK - 1414634

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON protective cover, B6, for HC-EVO-B06... sleeve housing, with single locking latch, with retaining cord, IP54



### Key Commercial Data

|                                      |   |
|--------------------------------------|---|
| Packing unit                         | 1 STK   |
| Minimum order quantity               | 10 STK  |
| GTIN                                 | <br>4 055626 131184 |
| GTIN                                 | 4055626131184   |
| Weight per Piece (excluding packing) | 46.000 g  |
| Custom tariff number                 | 85389099  |
| Country of origin                    | Poland  |

### Technical data

#### Dimensions

|                                   |       |
|-----------------------------------|-------|
| Diameter of retaining cord eyelet | 30 mm |
|-----------------------------------|-------|

#### Ambient conditions

|                                 |   |
|---------------------------------|---|
| Degree of protection            | IP54                                      |
|                                 | IP66 (for housing HC-STA.../ HC-EVO...PL) |
| Ambient temperature (operation) | -20 °C ... 100 °C                         |

#### General

|          |   |
|----------|---|
| Size     | B6  |
| Type     | for sleeve housing for single locking latch |
| Material | PA  |

# Protective covers - HC-B06-HCLWS-PLR-BK - 1414634

## Technical data

### General


|  |  |
|--|--|
| Seal material                          | NBR  |
| Flammability rating according to UL 94 | HB   |
| Seal present                           | yes  |
| Connection                             | Plastic protective cover for short-term protection |

### Standards and Regulations

|  |    |
|--|----|
| Flammability rating according to UL 94 | HB |
|--|----|

## Drawings

Dimensional drawing

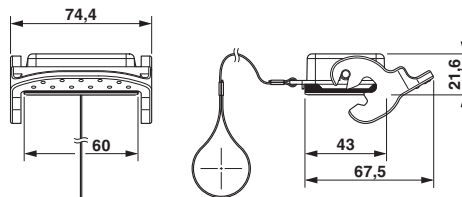

Dimensional drawing

## Approvals

Approvals

Approvals

EAC

Ex Approvals

### Approval details

|     |  |                     |
|-----|--|---------------------|
| EAC |  | 7500651.22.01.00246 |
|-----|--|---------------------|