

Contact insert - HC-K 6/ 6 ESTS - 1636392

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON pin insert, K6/6 series, for 6 power and 6 control contacts and PE, axial screw connection (power contacts)/screw connection (control contacts)



Key Commercial Data

Packing unit	1 STK
Minimum order quantity	20 STK
GTIN	 4 046356 180313
GTIN	4046356180313
Custom tariff number	85369010
Country of origin	Germany

Technical data

General

Connection method	Axial screw connection (power contacts) Screw connection (control contacts)
Tightening torque	6 Nm (Power contacts for 16 mm ²) 7 Nm (Power contacts for 25 mm ²) 0.8 Nm (control contacts) 8 Nm (Power contacts for 35 mm ²)
Degree of pollution	3
Overvoltage category	III
Number of positions	6+6+PE
No. of power contacts	6
No. of control contacts	6

Contact insert - HC-K 6/ 6 ESTS - 1636392

Technical data

General

Insertion/withdrawal cycles	≥ 500
Size	B24
Conductor cross section	16 mm ² ... 35 mm ² (power contacts) 0.2 mm ² ... 2.5 mm ² (control contacts)
Connection cross section AWG	5 ... 2 (power contacts) 24 ... 13 (control contacts)
Stripping length of the individual wire	13 mm ±1 mm (Power) 7.5 mm (Signal)
Wire diameter including insulation	11.4 mm (Max., power contacts)

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

Material data

Contact material	Cu alloy
Material of contact surface, power contact	Ag
Material of contact surface, control contact	Ag
Contact carrier material	PC

Electrical characteristics

Rated voltage (III/3)	690 V (power contacts) 400 V (control contacts)
Rated surge voltage	8 kV (power contacts) 6 kV (control contacts)
Rated current	100 A (power contacts) 16 A (control contacts)

Standards and Regulations

Connection in acc. with standard	CSA
Flammability rating according to UL 94	V0


Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Contact insert - HC-K 6/ 6 ESTS - 1636392

Schematic diagram

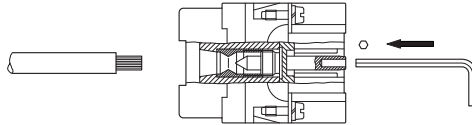

Axial connection

Approvals

Approvals

Approvals

UL Recognized / CSA / EAC / GL

Ex Approvals

Approval details

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 118976
Nominal voltage UN		600 V	

CSA		http://www.csagroup.org/services/testing-and-certification/certified-product-listing/	215291
mm ² /AWG/kcmil		5-2	
Nominal current I _N		100 A	
Nominal voltage UN		600 V	

EAC		7500651.22.01.00246
-----	--	---------------------

Contact insert - HC-K 6/ 6 ESTS - 1636392

Approvals

GL		http://exchange.dnv.com/tari/	6196614 HH
----	---	---	------------