

Zack Marker strip, flat - ZBF 8 CUS - 0825030

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, Mounting type: Snap into flat marker groove, for terminal block width: 8 mm, Lettering field: 5.15 x 8.15 mm

The illustration shows versions
 ZBF 8- UNPRINTED, -
 LGS:CONSEC.NOS, -
 QR:CONSEC.NOS and -SO/CMS

Why buy this product

- The ZBF zack marker strip system with flat marker groove is a marking solution for modular terminal blocks and electronics modules
- Sealing caps with external or inner thread
- Printed or unprinted marking labels
- Labeling service: Phoenix Contact can custom-label all zack marker strip markers according to your requirements



Key Commercial Data

| | |
|--------------------------------------|--------------------------------|
| Packing unit | 1 STK |
| GTIN | |
| GTIN | 4046356357630 |
| Weight per Piece (excluding packing) | 0.710 g |
| Custom tariff number | 49119900 |
| Country of origin | Germany |
| Note | Made to Order (non-returnable) |

Technical data

Dimensions

| | |
|-----------|------|
| Width (a) | 8 mm |
|-----------|------|

Ambient conditions

| | |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -40 °C ... 100 °C |
|---------------------------------|-------------------|

General

| | |
|-------|-------|
| Color | white |
|-------|-------|

Zack Marker strip, flat - ZBF 8 CUS - 0825030

Technical data

General


| | |
|--|--------------------------------|
| Components | free from silicone and halogen |
| Flammability rating according to UL 94 | V2 |
| Material | PA |
| Wipe resistance | DIN EN 61010-1 (VDE 0411-1) |
| Number of individual labels | 10 |
| Number of individual labels per row | 10 |
| Number of marker strips | 10 |
| Marking mounting type | Snap into flat marker groove |

Standards and Regulations

| | |
|--|-----------------------------|
| Wipe resistance | DIN EN 61010-1 (VDE 0411-1) |
| Flammability rating according to UL 94 | V2 |

Drawings

Schematic diagram

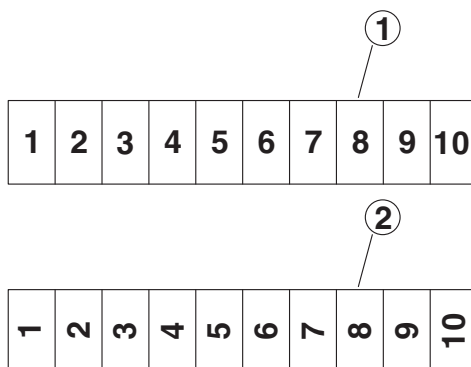

- ① Horizontal
- ② Vertical

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 24190219 |
| eCl@ss 4.1 | 24190219 |
| eCl@ss 5.0 | 27141137 |
| eCl@ss 5.1 | 27141137 |
| eCl@ss 6.0 | 27141137 |
| eCl@ss 7.0 | 27141137 |
| eCl@ss 8.0 | 27141137 |
| eCl@ss 9.0 | 27141137 |

Zack Marker strip, flat - ZBF 8 CUS - 0825030

Classifications

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC000761 |
| ETIM 4.0 | EC000761 |
| ETIM 5.0 | EC000761 |
| ETIM 6.0 | EC000761 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211811 |
| UNSPSC 7.0901 | 39121410 |
| UNSPSC 11 | 39121410 |
| UNSPSC 12.01 | 39121410 |
| UNSPSC 13.2 | 39131505 |