

## Marker for terminal blocks - UCT-TMF 8 CUS - 0829672

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, Mounting type: Snap into flat marker groove, for terminal block width: 8.2 mm, Lettering field: 7.4 x 4.7 mm



The figure shows the unlabeled version

### Why buy this product

- ✓ The UCT-TMF ... UniCard labeling range includes markers for products with tall and flat marker grooves
- ✓ Labeling service: Phoenix Contact can custom-label all UniCard markers according to your requirements



### Key Commercial Data

|                                      |                                                                                                         |
|--------------------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit                         | 1 STK                                                                                                   |
| GTIN                                 | <br>4 046356 598255 |
| GTIN                                 | 4046356598255                                                                                           |
| Weight per Piece (excluding packing) | 10.920 g                                                                                                |
| Custom tariff number                 | 49119900                                                                                                |
| Country of origin                    | Germany                                                                                                 |
| Note                                 | Made to Order (non-returnable)                                                                          |

### Technical data

#### Dimensions

|            |         |
|------------|---------|
| Length (b) | 5 mm    |
| Width (a)  | 7.6 mm  |
| Height     | 1.64 mm |

#### Ambient conditions

|                                 |                   |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -40 °C ... 120 °C |
|---------------------------------|-------------------|

#### General

|       |                                     |
|-------|-------------------------------------|
| Note  | Can be labeled via thermal transfer |
| Color | white                               |

## Marker for terminal blocks - UCT-TMF 8 CUS - 0829672

### Technical data

#### General

|                                                                     |                                     |
|---------------------------------------------------------------------|-------------------------------------|
| Components                                                          | free from silicone and halogen      |
| Flammability rating according to UL 94                              | V0                                  |
| Material                                                            | PC                                  |
|                                                                     | PC                                  |
| Wipe resistance                                                     | DIN EN 61010-1 (VDE 0411-1)         |
| Number of individual labels                                         | 42                                  |
| Number of individual labels per row                                 | 7                                   |
| RoHS compliant                                                      | Yes                                 |
| Printability                                                        | Thermal transfer                    |
|                                                                     | Inkjet printing                     |
| Device                                                              | 5146464 THERMOMARK CARD             |
|                                                                     | 5146563 THERMOMARK CARD-UCT-MAG2    |
|                                                                     | 5147888 BLUEMARK LED                |
|                                                                     | 5147999 BLUEMARK CLED               |
| Ink ribbon                                                          | 0801371 THERMOMARK-RIBBON 110-TC    |
|                                                                     | 5147421 BLUEMARK FLUID-CARTRIDGE    |
|                                                                     | 5146662 BLUEMARK CLED-FLUID-CARTR.  |
| Test for substances that would hinder coating with paint or varnish | VW PV 3.10.7:2005-02                |
| Result                                                              | Test passed                         |
| Test specification weathering-resistance                            | Following ISO 4892-2:2013-03        |
| Test duration                                                       | 96 h                                |
| Wipe resistance test result                                         | Test passed                         |
| Salt spray test specification                                       | DIN EN 60068-2-11:2000-02           |
| Test duration                                                       | 96 h                                |
| Salt spray testing result                                           | Test passed                         |
| Wipe resistance of test specification inscriptions                  | DIN EN 61010-1 (VDE 0411-1):2011-07 |
| Result                                                              | Test passed                         |
| Marking mounting type                                               | Snap into flat marker groove        |


#### Standards and Regulations

|                                        |                             |
|----------------------------------------|-----------------------------|
| Wipe resistance                        | DIN EN 61010-1 (VDE 0411-1) |
| Flammability rating according to UL 94 | V0                          |

### Drawings

## Marker for terminal blocks - UCT-TMF 8 CUS - 0829672

Schematic diagram

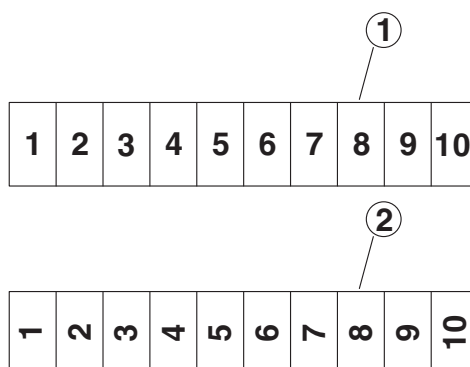

- ① Horizontal
- ② Vertical

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 24190208 |
| eCl@ss 4.1 | 24190208 |
| eCl@ss 5.0 | 27149103 |
| eCl@ss 5.1 | 27141137 |
| eCl@ss 6.0 | 27141137 |
| eCl@ss 7.0 | 27141137 |
| eCl@ss 8.0 | 27141137 |
| eCl@ss 9.0 | 27141137 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC000761 |
| ETIM 4.0 | EC000761 |
| ETIM 5.0 | EC000761 |
| ETIM 6.0 | EC000761 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211811 |
| UNSPSC 7.0901 | 39121410 |
| UNSPSC 11     | 39121410 |
| UNSPSC 12.01  | 39121410 |
| UNSPSC 13.2   | 39131505 |